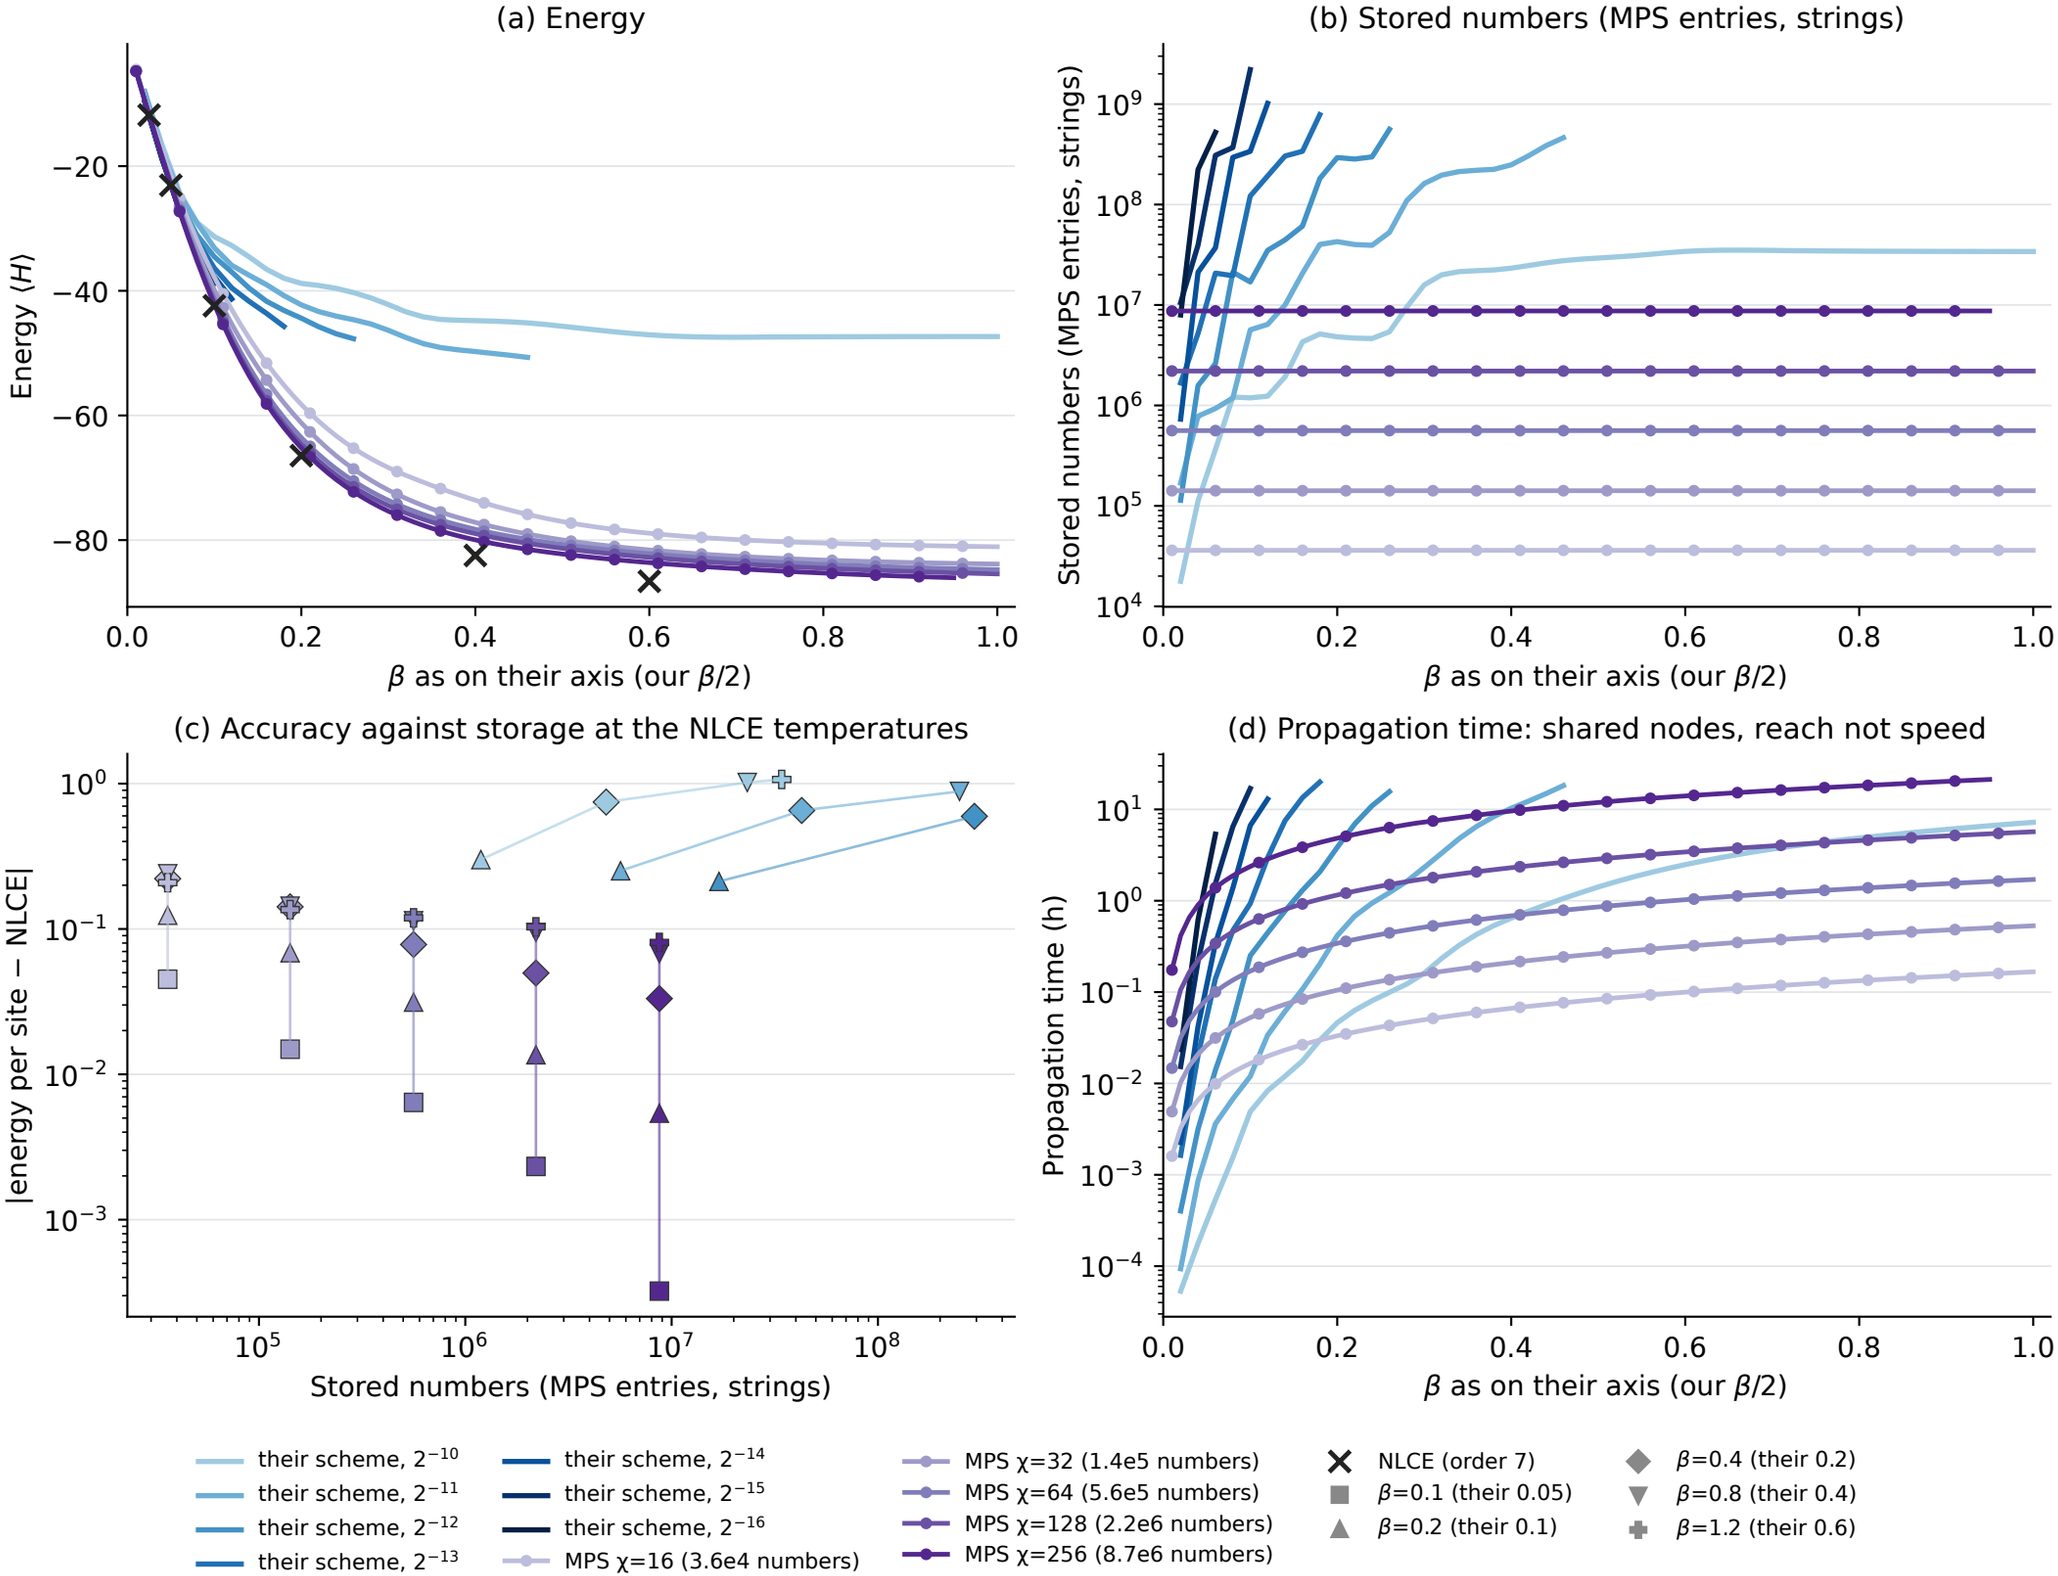

37-site triangular hexagon, spinful Hubbard t=1, U=8, μ=U/2, from the identity, drawn at β/2 as on their axis · their scheme: their library's gate set, first order, our step 0.04 (their 0.02), division by the identity coefficient and |μ|≤2^-k dropped after every rotation · our MPS d=4, second order, step 0.02, normalised to the identity after every gate, the bond χ alone decides the truncation (cut 2^-30), 8 threads · CoolMUC-4, shared nodes, their scheme on 8-16 threads · NLCE: highest saved order · (c): runs that reach only one NLCE temperature are left out