




Services Are Running

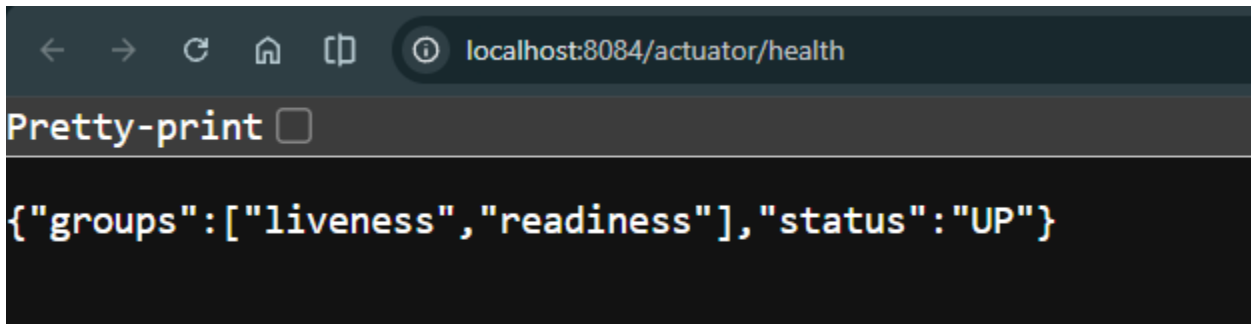


A screenshot of a web browser window. The address bar shows 'localhost:8084/actuator/health'. Below the address bar is a 'Pretty-print' button with a checkbox. The main content area displays a JSON response: `{"groups":["liveness","readiness"],"status":"UP"}`.

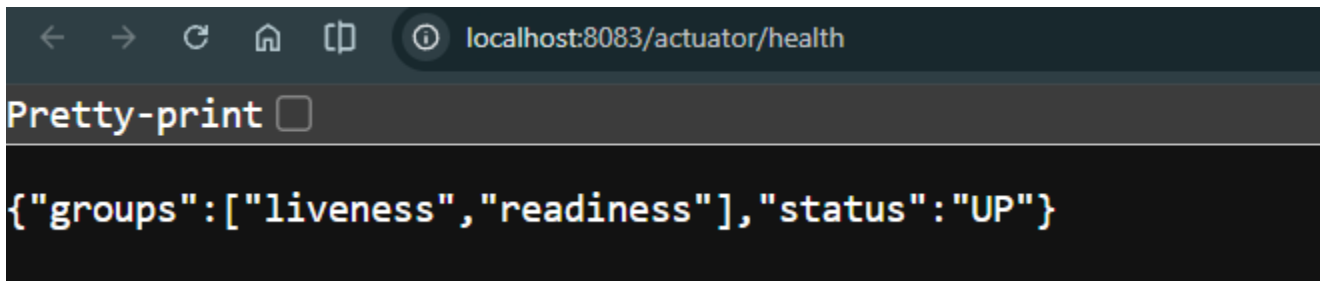

A screenshot of a web browser window. The address bar shows 'localhost:8083/actuator/health'. Below the address bar is a 'Pretty-print' button with a checkbox. The main content area displays a JSON response: `{"groups":["liveness","readiness"],"status":"UP"}`.

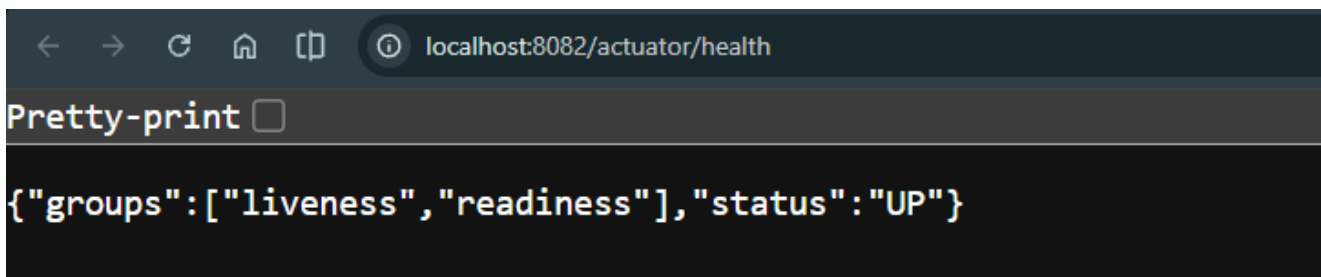

A screenshot of a web browser window. The address bar shows 'localhost:8082/actuator/health'. Below the address bar is a 'Pretty-print' button with a checkbox. The main content area displays a JSON response: `{"groups":["liveness","readiness"],"status":"UP"}`.

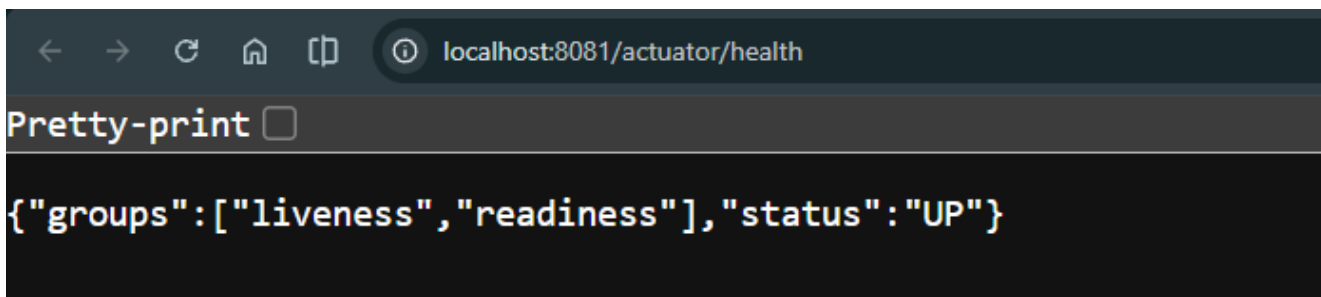

A screenshot of a web browser window. The address bar shows 'localhost:8081/actuator/health'. Below the address bar is a 'Pretty-print' button with a checkbox. The main content area displays a JSON response: `{"groups":["liveness","readiness"],"status":"UP"}`.


Swagger
powered by SMARTBEAR

/v3/api-docs
Explore

RideLink Account Service API 1.0.0 OAS 3.1

[/v3/api-docs](#)

Manages registration, login, account profiles, roles and account status.

Servers

http://localhost:8081 - Generated server url

Authorize

auth-controller

POST /api/v1/auth/login

account-controller

POST /api/v1/accounts/passengers

POST /api/v1/accounts/drivers

PATCH /api/v1/accounts/{accountId}/status

GET /api/v1/accounts/me

PATCH /api/v1/accounts/me

internal-account-controller

GET /internal/v1/accounts/{accountId}/summary

status-controller


Swagger
powered by SMARTBEAR

/v3/api-docs
Explore

RideLink Fare and Payment Service API 1.0.0 OAS 3.1

[/v3/api-docs](#)

Manages fare estimates, final fares, simulated payments and receipts.

Servers

http://localhost:8084 - Generated server url

Authorize

Internal Fare Management Internal final fare operations

POST /internal/v1/fares/final Create final fare

GET /internal/v1/fares/estimates/{estimateId} Validate and retrieve an estimate for Ride Service

Fare Management Final fare retrieval

POST /api/v1/fares/estimates Create a fare estimate

GET /api/v1/fares/rides/{rideId} Get the final fare for a ride participant or administrator

Receipt Management Payment receipt operations

GET /api/v1/payments/{paymentId}/receipt Get payment receipt

Payment Management Payment operations

POST /api/v1/payments Create a payment

 Swagger
powered by SMARTBEAR

/v3/api-docs

Explore



RideLink Ride Management Service API 1.0.0 OAS 3.1

/v3/api-docs

Manages ride requests, driver assignment and the ride lifecycle.

Servers

http://localhost:8083 - Generated server url

Authorize 

Ride management

GET

/api/v1/rides

List rides visible to the signed in account

POST

/api/v1/rides

Create a ride and reserve an eligible driver

POST

/api/v1/rides/{rideId}/start

Start an accepted ride

POST

/api/v1/rides/{rideId}/complete

Complete a ride after final fare creation

POST

/api/v1/rides/{rideId}/cancel

Cancel a ride before it starts

POST

/api/v1/rides/{rideId}/accept

Accept an assigned ride

GET

/api/v1/rides/{rideId}

View a ride as its passenger, assigned driver or administrator

Internal ride access

GET

/internal/v1/rides/{rideId}/summary

Return the payment authorization summary for a ride

status-controller

 Swagger
powered by SMARTBEAR

/v3/api-docs

Explore



RideLink Driver & Vehicle Service API 1.0.0 OAS 3.1

/v3/api-docs

Manages driver operations, vehicles, availability, locations and ride reservations.

Servers

http://localhost:8082 - Generated server url

Authorize 

Driver profile

PUT

/api/v1/drivers/me/vehicle

Create or replace the signed-in driver's vehicle

POST

/api/v1/drivers/me/profile

Create the signed-in driver's operational profile

PATCH

/api/v1/drivers/me/location

Update the driver's simulated location

PATCH

/api/v1/drivers/me/availability

Change availability to AVAILABLE or OFFLINE

GET

/api/v1/drivers/me

View the signed-in driver's profile and vehicle

Driver assignment

POST

/internal/v1/drivers/{driverId}/reservations

Atomically reserve an available driver

GET

/internal/v1/drivers/eligible

Find available drivers for Ride Service

DELETE

/internal/v1/drivers/{driverId}/reservations/{rideId}

Release a driver's matching reservation

status-controller

Postman Requests

Account requests

The screenshot displays the Postman interface for a REST client. The left sidebar shows a collection named 'RideLink - Account Service' with various endpoints. The main panel shows a GET request to 'RideLink - Account Service > 01 - Service status' with the URL 'GET {{accountBaseUrl}} /api/v1/status'. The response is a 200 OK status with a response time of 12 ms and a body size of 470 B. The response body is shown in JSON format:

```
1 {
2   "timestamp": "2026-10-05T05:33:00.076294100Z",
3   "service": "Account Service",
4   "status": "UP"
5 }
```

The bottom of the interface shows the 'ENVIRONMENTS' section with 'RideLink Local' selected.

The screenshot displays the Postman application interface. On the left, the 'COLLECTIONS' sidebar shows a tree view of the 'RideLink' collection, with 'POST 06 - Login admin' selected. Below this, the 'ENVIRONMENTS' section shows 'RideLink Local' as the active environment. The main workspace is divided into two panes. The top pane shows the details of the selected request, including the URL 'POST {{accountBaseUrl}} /api/v1/auth/login', the 'Params' tab, and a table for 'Query Params'. The bottom pane shows the 'Body' tab with a JSON response. The response is a 200 OK status, indicating a successful login. The JSON body contains an 'accessToken', 'tokenType' (Bearer), 'expiresInSeconds' (3600), 'accountId', and 'role' (ADMIN).

Request Details:

- Method: POST
- URL: `{{accountBaseUrl}} /api/v1/auth/login`
- Params: Authorization, Headers, Body, Scripts, Settings
- Query Params: Key, Value, Description, Bulk Edit

Response Details:

- Status: 200 OK
- Time: 72 ms
- Size: 878 B
- Body (JSON):

```
{  "accessToken": "eyJraWQ1OjR2Y0ejQvVjF5QXhHT3pRUXR4c21RM0JoY2JQRWk1VU1kX053T116OV1NIiwWxnIjo1SFMyNTYiIq.eyJ3ZmI0IjkyY2YzY2c3M0eX0GI4LTQ2YTAtYWRlYS11ZDI3Mjc1NjE0OD0EILCjY2x1Ijo1QURNSU41LCJpc3M1OjJyaWR1bG1uay1hY2NvdW50LXN1cnZpY2U1LCJleHAiOjE3OTExODIwMTI5ImlhdC16MTc5MTE3ODQxMiwianRpIjo1YTAXMWFjZDktNTM2My00ZWwLW3k0TmMtM2M1MTk0TE4yZWIn0.eyJvZmVzZq4hF8k1ZxpwcB9Chdn7UqapVFtqEzC7bPM",  "tokenType": "Bearer",  "expiresInSeconds": 3600,  "accountId": "dcf8c770-18b8-46a0-adea-ed2727561481",  "role": "ADMIN"}
```

The screenshot displays the Postman REST client interface. On the left, a sidebar shows a collection named 'RideLink - Account Service' with 13 endpoints. The selected endpoint is 'POST 05 - Login driver'. The main panel shows the details of this endpoint, including its URL, method, and a successful JSON response.

Endpoint Details:

- Method: POST
- URL: `{{accountBaseUrl}} /api/v1/auth/login`
- Params: Authorization, Headers, Body, Scripts, Settings

Query Params:

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body:

```
{
  "accessToken": "eyJraW01dWZ2Y0eJ0tV1F5QXhHT3pRUXR4c2lRM0JoY2J0RwK1VU1kX053T1l6OVNiwiYXNlIjo1SFMyNTY1fQ.eyJzdWl0Ii1zYyAyZWQwMS1mZDdlLTlmZGutODVmZS00MDc2YTlxYTk5ZTEiLCJyb2x1Ijo1RFRJbVkv5iIiwiaXNzIjoicmlkZWxpbnstYWNjb3VudC1zZXJ2aWNL1iwiZkhwa1oxNzksMTgyMDA3LCJpYXN0Ijo1E30TEhNzg0MDcsImp8aSI6Ij01YWM3YmY1LTljMTYtNGEzY184Zjg2LTBjYWE8ZjA1NmUzY119.GHnckjntRzL9D07PTxyiSR0meZZivOHuKJAYUkCcSE",
  "tokenType": "Bearer",
  "expiresInSeconds": 3600,
  "accountId": "3b02ed01-fd2b-4fde-85fe-4076a21a99e1",
  "role": "DRIVER"
}
```

RideLink

Overview GET 01 - Service sta POST 02 - Register pa POST 03 - Register dri POST 04 - Login passr POST 05 - Login drive POST 06 - Login admin + RideLink Local

RideLink - Account Service > 04 - Login passenger Save Share

POST {{accountBaseUrl}} /api/v1/auth/login Send

Docs Params Authorization Headers Body Scripts Settings Cookies

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 12 Test Results 1/1 Save Response

JSON Preview Visualize

```
1 {
2   "accessToken": "eyJraWQ1O1JwR2Y0ej0tV1F5QXhHT3pRUXR4c21RM0JoY2JQRWk1VU1kX053T1160V1NIiw1YXNzIjo1SFMyNTY1fQ.eyJ3ZWI1O1I3YzIwMD1mZS1mYWY5LTQ5MDI1OWNIY183Nzk8OWFkZDQwOGM1LCJyb2x1Ijo1UEFTU8VOR0VSiw1aXNzIjo1cm1kZWxpbmstYWVjb3VudC1zZXJ2aWNI1iwiZmIjOnNzkkMTgyMDAzLCJpYXQ1OjE3OTExNzg5MDMsImp0aSI6IjkhOTZkNjNiLTU0MmYtNDUxYy1hYTdhLTM2ZmEzYTgwNzc4NCJ9.xGK_E1of0gd4phK5C6P1p6wRnhg-C3UmZ3jsN6x5MhM",
3   "tokenType": "Bearer",
4   "expiresInSeconds": 3600,
5   "accountId": "7c2089fe-faf9-4902-9ceb-77949add488c",
6   "role": "PASSENGER"
7 }
```

ENVIRONMENTS RideLink Local

DOCUMENTS SPECS MOCKS DATASETS TOOLSETS FLOWS

Open Explorer Terminal Console Import Collection Scanning Githubs Vault Tools

RideLink

Overview GET 01 - Service sta POST 02 - Register pa POST 03 - Register dri POST 04 - Login pass POST 05 - Login drive POST 06 - Login admin + RideLink Local

RideLink - Account Service > 03 - Register driver

POST {{accountBaseUrl}} /api/v1/accounts/drivers Send

Docs Params Authorization Headers Body Scripts Settings Cookies

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 12 Test Results 1/1 Save Response

JSON Preview Visualize

```
1 {
2   "accountId": "3b82ed81-fd2b-4fde-85fe-4876a21a99e1",
3   "email": "driver.demo@example.com",
4   "role": "DRIVER",
5   "status": "ACTIVE",
6   "fullName": "Demo Driver",
7   "phone": "+94772222222",
8   "createdAt": "2026-10-05T05:33:17.915761600Z"
9 }
```

ENVIRONMENTS RideLink Local

DOCUMENTS SPECS MOCKS DATASETS TOOLSETS FLOWS

Open Folder Terminal Console Import Complete Scanning Globals Vault Tools

Overview GET 01 - Service sta POST 02 - Register passenger POST 03 - Register dri POST 04 - Login pass POST 05 - Login drive POST 06 - Login admin RideLink Local

RideLink - Account Service > 02 - Register passenger

POST {{accountBaseUrl}} /api/v1/accounts/passengers Send

Docs Params Authorization Headers Body Scripts Settings Cookies

Query Params

Key	Value	Description	Bulk Edit	...
Key	Value	Description		

Body Cookies Headers 12 Test Results 1/1 Save Response

201 Created 164 ms 612 B Save Response

JSON Preview Visualize

```
1 {
2   "accountId": "7c2009fe-faf9-4902-9ceb-77949add488c",
3   "email": "passenger.demo@example.com",
4   "role": "PASSENGER",
5   "status": "ACTIVE",
6   "fullName": "Demo Passenger",
7   "phone": "+94771111111",
8   "createdAt": "2026-10-05T05:33:10.137583600Z"
9 }
```

ENVIRONMENTS RideLink Local

DOCUMENTS

SPECS

MOCKS

DATASETS

TOOLSETS

FLAWS

Open Folder Terminal Console Import Collections No anomalies detected

Driver requests

The screenshot shows the Postman application interface. On the left, a sidebar lists collections under 'RideLink - Driver & Vehicle Service'. The main panel displays a GET request to `{{driverBaseUrl}}/api/v1/status`. The 'Params' tab is active, showing a table with one parameter: 'Key' and 'Value'. The 'Body' tab is also visible, showing a JSON response.

Request Details:

- Method: GET
- URL: `{{driverBaseUrl}}/api/v1/status`
- Params:

Key	Value	Description	Bulk Edit
Key	Value	Description	

Response Details:

- Status: 200 OK
- Time: 5 ms
- Size: 479 B
- Body (JSON):

```
1 {
2   "timestamp": "2026-10-05T05:34:53.889057360Z",
3   "status": "UP",
4   "service": "Driver & Vehicle Service"
5 }
```

RideLink

GET 01 - POST 02 - POST 03 - POST 04 - POST 05 - POST 06 - GET 01 - POST 02 - PUT 03 - PATCH 04 - PATCH 05 - GET 06 - V RideLink Local

RideLink - Driver & Vehicle Service 06 - View my profile

GET ((driverBaseUrl) /api/v1/drivers/me) Send

Docs Params Authorization Headers 7 Body Scripts Settings Cookies

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 12 Test Results 200 OK 10 ms 812 B Save Response

JSON Preview Visualize

```
1 {
2   "driverId": "6dec26de-dd99-4a4d-a364-c0fe9f36f04e",
3   "accountId": "3b82ed81-fd2b-4fde-85fe-4876a21a99e1",
4   "serviceArea": "COLOMBO",
5   "locationName": "Wellawatte",
6   "latitude": 6.874790,
7   "longitude": 79.868590,
8   "availability": "AVAILABLE",
9   "vehicle": {
10    "vehicleId": "41d818fa-f316-4af0-89a3-095d959c253e",
11    "registrationNumber": "CAB-1234",
12    "vehicleType": "CAR",
13    "manufacturer": "Toyota",
14    "model": "Aqua",
15    "colour": "White",
16    "seatCapacity": 4,
17    "status": "ACTIVE"
18  }
19 }
```

Open Folder Terminal Console Import Complete No anomalies detected Globals Vault Tools

RideLink

Overview GET 01 - POST 02 - F POST 03 - F POST 04 - L POST 05 - L POST 06 - L GET 01 - Se POST 02 - C PUT 03 - A PATCH 04 - PATCH 05 - RideLink Local

RideLink - Driver & Vehicle Service 05 - Go available Save Share

PATCH {{driverBaseUrl}}/api/v1/drivers/me/availability Send

Docs Params Authorization Headers 10 Body Scripts Settings Cookies

Query Params

Key	Value	Description	Bulk Edit	...
Key	Value	Description		

Body Cookies Headers 12 Test Results 200 OK 19 ms 812 B Save Response

{ JSON Preview Visualize

```
1 {
2   "driverId": "6dec26de-dd09-4a4d-a364-c0fe9f36f04e",
3   "accountId": "3b02ad01-fd2b-4fde-85fe-4076a21a99e1",
4   "serviceArea": "COLOMB0",
5   "locationName": "Mollawatte",
6   "latitude": 6.874780,
7   "longitude": 79.869500,
8   "availability": "AVAILABLE",
9   "vehicle": {
10     "vehicleId": "41d818fa-f316-4af0-89a3-095d959c253e",
11     "registrationNumber": "CAB-1234",
12     "vehicleType": "CAR",
13     "manufacturer": "Toyota",
14     "model": "Aqua",
15     "colour": "White",
16     "seatCapacity": 4,
17     "status": "ACTIVE"
18   }
19 }
```

Open Folder Terminal Console Import Complete No anomalies detected Globals Vault Tools

RideLink

COLLECTIONS

RideLink - Account Service

RideLink - Driver & Vehicle Service

GET 01 - Service status

POST 02 - Create my driver profile

PUT 03 - Add or replace my vehicle

PATCH 04 - Update my location

PATCH 05 - Go available

GET 06 - View my profile

GET 07 - Find eligible drivers

POST 08 - Reserve driver

POST 09 - Replay same reservation

DEL 10 - Release driver

GET Negative - wrong service token

PATCH Negative - invalid location

PATCH Negative - passenger cannot update driver availa...

RideLink - Fare & Payment Service

RideLink - Ride Management Service

ENVIRONMENTS

RideLink Local

DOCUMENTS

SPECS

MOCKS

DATASETS

TOOLSETS

FLOWS

OverviewGET 01 - StPOST 02 - RePOST 03 - RePOST 04 - LoPOST 05 - LoPOST 06 - LoGET 01 - SerPOST 02 - CPUT 03 - AdPATCH 04 - URideLink Local

RideLink - Driver & Vehicle Service04 - Update my location

PATCH{{(driverBaseUrl)}/api/v1/drivers/me/location}

DocsParamsAuthorizationHeaders 10BodyScriptsSettings

Query Params

Key	Value	Description	Bulk Edit	...
Key	Value	Description		

BodyCookiesHeaders 12Test Results200 OK23 ms806 BSave Response

JSON

PreviewVisualize

```
1 {
2   "driverId": "6dec26de-dd09-4a4d-a364-c0fe9f36f94e",
3   "accountId": "3b02ed01-fd2b-4fde-85fe-4076a21a99e1",
4   "serviceArea": "COLOMBO",
5   "locationName": "Wellawatte",
6   "latitude": 6.8747,
7   "longitude": 79.8695,
8   "availability": "OFFLINE",
9   "vehicle": {
10    "vehicleId": "41d818fa-f316-4af0-89a3-095d959c253e",
11    "registrationNumber": "CAB-1234",
12    "vehicleType": "CAR",
13    "manufacturer": "Toyota",
14    "model": "Aqua",
15    "colour": "White",
16    "seatCapacity": 4,
17    "status": "ACTIVE"
18  }
19 }
```

Page 13

RideLink

Overview GET 01 - Ser POST 02 - Reg POST 03 - Reg POST 04 - Log POST 05 - Log POST 06 - Log GET 01 - Servi POST 02 - Cre PUT 03 - Add RideLink Local

RideLink - Driver & Vehicle Service 03 - Add or replace my vehicle

PUT {{driverBaseUrl}} /api/v1/drivers/me/vehicle Send

Docs Params Authorization Headers 10 Body Scripts Settings Cookies

Query Params

Key	Value	Description	Bulk Edit	...
Key	Value	Description		

Body Cookies Headers 12 Test Results 201 Created 54 ms 820 B Save Response

{ } JSON Preview Visualize

```
1 {
2   "driverId": "6dec26de-dd09-4a4d-a364-c0fe9f36f04e",
3   "accountId": "3b02ed81-1d2b-4fde-85fe-4076a21a99e1",
4   "serviceArea": "COLOMB0",
5   "locationName": "Bambalapitiya",
6   "latitude": 6.893500,
7   "longitude": 79.855200,
8   "availability": "OFFLINE",
9   "vehicle": {
10     "vehicleId": "41d818fa-f316-4af0-89a3-095d959c253e",
11     "registrationNumber": "CAB-1234",
12     "vehicleType": "CAR",
13     "manufacturer": "Toyota",
14     "model": "Aqua",
15     "colour": "White",
16     "seatCapacity": 4,
17     "status": "ACTIVE"
18   }
19 }
```

ENVIRONMENTS RideLink Local

DOCUMENTS

SPECS

MOCKS


DATASETS

TOOLSETS

FLWS

Open Folder Terminal Console Import Complete No anomalies detected

Global Vault Tools

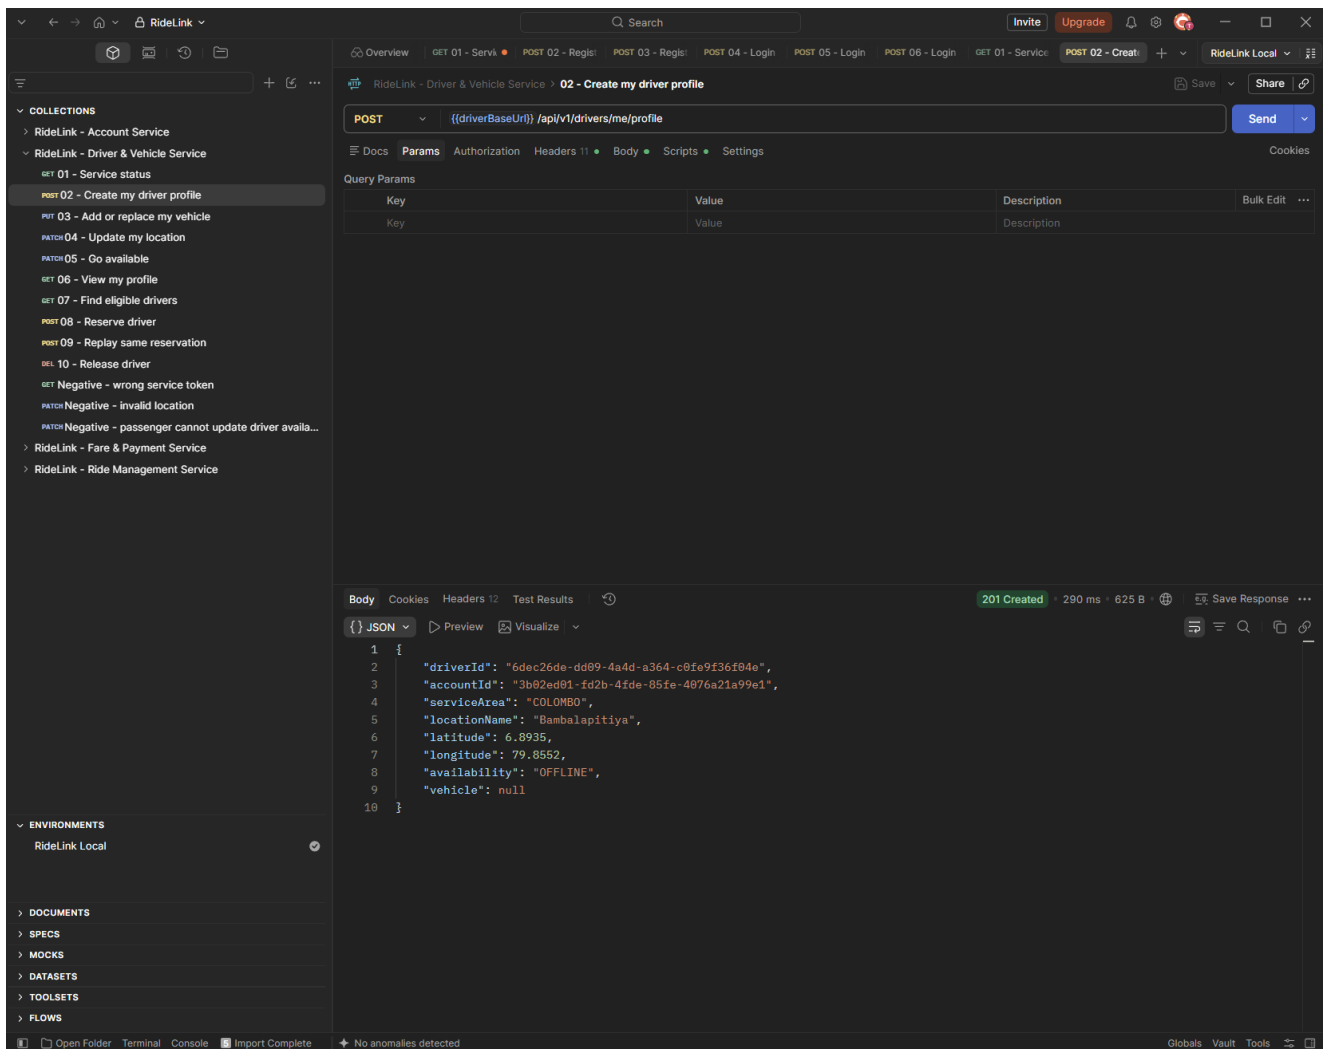

Fare requests

The screenshot shows a REST client interface with a sidebar on the left containing a list of collections and environments. The main panel displays a GET request to the endpoint `{{fareBaseUrl}}/internal/v1/fares/estimates/{{estimateId}}`. The response is a 200 OK status with a 6 ms response time and a 664 B body. The response body is a JSON object with the following fields:

```
1 {
2   "estimateId": "0e8e01fe-7235-492d-bf29-a14f56e52f12",
3   "pickup": "Mollawatte",
4   "destination": "Colombo Fort",
5   "distanceKm": 10.50,
6   "amount": 1090.00,
7   "currency": "LKR",
8   "ruleVersion": "RIDE LINK_2026_V1",
9   "createdAt": "2026-10-05T05:36:28.890474Z",
10  "expiresAt": "2026-10-05T06:06:28.890474Z"
11 }
```

The sidebar on the left shows the following collections:

- COLLECTIONS
 - RideLink - Account Service
 - RideLink - Driver & Vehicle Service
 - RideLink - Fare & Payment Service
 - GET 01 - Service status
 - POST 02 - Create fare estimate
 - GET 03 - Validate estimate internally
 - GET 04 - View final fare after ride completion
 - POST 05 - Record successful simulated payment
 - GET 06 - Retrieve receipt
 - POST Negative - Invalid distance
 - GET Negative - wrong service token
 - POST Negative setup - create another estimate
 - POST Negative - payment before ride completion
 - RideLink - Ride Management Service

The sidebar also shows the following environments:

- ENVIRONMENTS
 - RideLink Local

The sidebar also shows the following documents:

- DOCUMENTS
- SPECS
- MOCKS
- DATASETS
- TOOLSETS
- FLAWS

RideLink

POST 03 - F POST 04 - L POST 05 - L POST 06 - L GET 01 - Se POST 02 - C PUT 03 - A PATCH 04 - PATCH 05 - GET 06 - V GET 01 - Se POST 02 - C + RideLink Local

RideLink - Fare & Payment Service 02 - Create fare estimate Save Share

POST {{fareBaseUri}} /api/v1/fares/estimates Send

Docs Params Authorization Headers 10 Body Scripts Settings Cookies

Query Params

Key	Value	Description	Bulk Edit	...
Key	Value	Description		

Body Cookies Headers 12 Test Results 1/1 Save Response

201 Created 152 ms 670 B

JSON Preview Visualize

```
1 {
2   "estimateId": "8e8e91fe-7235-492d-bf29-a14f56e52f12",
3   "pickup": "Wellawatte",
4   "destination": "Colombo Fort",
5   "distanceKm": 10.50,
6   "amount": 1090.00,
7   "currency": "LKR",
8   "ruleVersion": "RIDEINK_2026_V1",
9   "createdAt": "2026-10-05T05:36:28.890474300Z",
10  "expiresAt": "2026-10-05T06:06:28.890474300Z"
11 }
```

ENVIRONMENTS RideLink Local

DOCUMENTS SPECS MOCKS DATASETS TOOLSETS FLOWS

Open Folder Terminal Console Import Complete No anomalies detected

Globals Vault Tools

POST 02 - F POST 03 - F POST 04 - L POST 05 - L POST 06 - L GET 01 - Se POST 02 - L PUT 03 - A PATCH 04 - PATCH 05 - GET 06 - V GET 01 - Se RideLink Local

RideLink - Fare & Payment Service 01 - Service status Save Share

GET {{fareBaseUri}} /api/v1/status Send

Docs Params Authorization Headers 0 Body Scripts Settings Cookies

Query Params

Key	Value	Description	Bulk Edit	...
Key	Value	Description		

Body Cookies Headers 12 Test Results Save Response

200 OK 4 ms 474 B

JSON Preview Visualize

```
1 {
2   "service": "Fare & Payment Service",
3   "timestamp": "2026-10-05T05:36:18.781686Z",
4   "status": "UP"
5 }
```

ENVIRONMENTS RideLink Local

DOCUMENTS SPECS MOCKS DATASETS TOOLSETS FLOWS

Open Folder Terminal Console Import Complete No anomalies detected Globals Vault Tools

Ride Requests

The screenshot displays a REST client interface with a sidebar on the left containing a collection of API endpoints. The main panel shows a GET request to the endpoint `{{fareBaseUrl}}/api/v1/payments/{{paymentId}}/receipt`. The response is a 200 OK status with a JSON body containing receipt details.

Endpoint: `GET {{fareBaseUrl}}/api/v1/payments/{{paymentId}}/receipt`

Query Params:

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body:

```
{
  "receiptNumber": "RL-20261005-08AD1908",
  "paymentId": "d8ad1908-e7fc-4b22-afd8-f185c5cd208d",
  "rideId": "7f033232-d6ef-4ca8-a364-0a5d14d09a4e",
  "passengerId": "7c2009fe-faf9-4902-9ceb-77949add488c",
  "amount": 1090.00,
  "currency": "LKR",
  "paymentStatus": "PAID",
  "methodLabel": "SIMULATED_CARD",
  "issuedAt": "2026-10-05T05:51:11.839904Z",
  "notice": "Simulated payment - no real money was transferred"
}
```

RideLink

Search

Invite Upgrade

POST 02 - GET 03 - V GET 01 - Se POST 02 - GET 03 - V GET 04 - Li POST 05 - POST 06 - POST 07 - GET 08 - In GET 04 - V POST 05 - RideLink Local

RideLink - Fare & Payment Service > 05 - Record successful simulated payment

Save Share

POST ((fareBaseUri)) /api/v1/payments Send

Docs Params Authorization Headers 1 Body Scripts Settings Cookies

Query Params

Key	Value	Description	Bulk Edit	...
Key	Value	Description		

Body Cookies Headers 12 Test Results 1/1

201 Created 59 ms 617 B Save Response

JSON Preview Visualize

```
1 {
2   "paymentId": "d8ad1988-e7fc-4b22-nfd8-f185c5cd288d",
3   "rideId": "7f033232-d6ef-4ca8-a364-0a5d14d09a4e",
4   "amount": 1090.00,
5   "currency": "LKR",
6   "status": "PAID",
7   "methodLabel": "SIMULATED_CARD",
8   "recordedAt": "2026-10-05T05:51:11.837286100Z"
9 }
```

Open Folder Terminal Console Import Complete

No anomalies detected

Globals Vault Tools

RideLink

GET 01 - Service status POST 02 - Create my driver profile PUT 03 - Add or replace my vehicle PATCH 04 - Update my location PATCH 05 - Go available GET 06 - View my profile GET 07 - Find eligible drivers POST 08 - Reserve driver POST 09 - Replay same reservation DEL 10 - Release driver GET Negative - wrong service token PATCH Negative - invalid location PATCH Negative - passenger cannot update driver availability

RideLink - Fare & Payment Service

GET 01 - Service status POST 02 - Create fare estimate GET 03 - Validate estimate internally GET 04 - View final fare after ride completion POST 05 - Record successful simulated payment POST 06 - Retrieve receipt POST Negative - invalid distance GET Negative - wrong service token POST Negative setup - create another estimate POST Negative - payment before ride completion

RideLink - Ride Management Service

ENVIRONMENTS

RideLink Local

DOCUMENTS

SPECS

MOCKS

DATASETS

TOOLSETS

FLAWS

Search

Invite Upgrade

RideLink Local

RideLink - Fare & Payment Service > 04 - View final fare after ride completion

GET {{(fareBaseUrl)} /api/v1/fares/rides/ {{(rideId)}} Send

Docs Params Authorization Headers 7 Body Scripts Settings Cookies

Query Params

Key	Value	Description	Bulk Edit	...
Key	Value	Description		

Body Cookies Headers 12 Test Results 200 OK 87 ms 668 B Save Response

JSON Preview Visualize

```
1 {
2   "fareId": "236315b5-2311-4c63-aa40-1ffd75d9389f",
3   "rideId": "7f033232-d6ef-4ca8-a364-0a5d14d09a4e",
4   "passengerId": "7c2009fe-faf9-4902-9ceb-77949add488c",
5   "distanceKm": 10.50,
6   "amount": 1090.00,
7   "currency": "LKR",
8   "ruleVersion": "RIDE LINK_2026_V1",
9   "createdAt": "2026-10-05T05:50:17.596853Z"
10 }
```

Open Folder Terminal Console Import Collections No anomalies detected

GET 06 - V GET 01 - Se POST 02 - GET 03 - V GET 01 - Se POST 02 - GET 03 - V GET 04 - L POST 05 - POST 06 - POST 07 - GET 08 - In RideLink Local

RideLink - Ride Management Service > 08 - Internal ride summary

GET {{rideBaseUrl}}/internal/v1/rides/{{rideId}}/summary

Docs Params Authorization Headers 7 Body Scripts Settings Cookies

Query Params

Key	Value	Description	Bulk Edit	...
Key	Value	Description		

Body Cookies Headers 12 Test Results 200 OK · 9 ms · 602 B Save Response

{ } JSON Preview Visualize

```
1 {
2   "rideId": "7f833232-d6ef-4ca8-a364-0a5d14d09a4e",
3   "passengerId": "7c2989fe-faf9-4982-9cab-77949add488c",
4   "driverAccountId": "3b02ed01-fd2b-4fde-85fe-4876a21a99e1",
5   "status": "COMPLETED",
6   "distanceKm": 10.58,
7   "finalFare": 1099.00
8 }
```

Open Folder Terminal Console Import Complete No snippets detected

Postman interface showing a REST client request for the RideLink API. The request is a POST to the endpoint `{{(rideBaseUrl)}/api/v1/rides/{{(rideId)}}/complete` under the "RideLink - Ride Management Service" collection.

The request is configured with the following parameters:

- Method: POST
- URL: `{{(rideBaseUrl)}/api/v1/rides/{{(rideId)}}/complete`
- Params: None
- Headers: None
- Body: JSON

The response is a 200 OK status, indicating the ride was successfully completed. The response body is a JSON object:

```
{
  "rideId": "7f033232-d6ef-4ca8-a364-0a5d14d09a4e",
  "passengerId": "7c2009fe-faf9-4982-9ceb-77949add408e",
  "driverId": "6dec26de-dd09-4a4d-a364-c0fe9f36f04e",
  "driverAccountId": "3b02ed01-fd2b-4fde-85fe-4076a21a99e1",
  "pickup": "Wellawatte",
  "destination": "Colombo Fort",
  "serviceArea": "COLOMBO",
  "distanceKm": 10.50,
  "seatCount": 2,
  "fareEstimateId": "0e8e01fe-7235-492d-bf29-a14f56e52f12",
  "estimatedFare": 1090.00,
  "finalFare": 1090.00,
  "currency": "LKR",
  "status": "COMPLETED",
  "cancellationReason": null,
  "acceptedAt": "2026-10-05T05:47:33.975206Z",
  "startedAt": "2026-10-05T05:50:01.422233Z",
  "completedAt": "2026-10-05T05:50:17.618598900Z",
  "cancelledAt": null,
  "createdAt": "2026-10-05T05:47:31.157939Z",
  "updatedAt": "2026-10-05T05:50:17.618598900Z"
}
```

RideLink

Search

Invite Upgrade

RideLink Local

RideLink - Ride Management Service > 06 - Start ride as driver

POST {{rideBaseUrl}} /api/v1/rides/ {{rideId}} /start

Send

Docs Params Authorization Headers Body Scripts Settings Cookies

Query Params

Key	Value	Description	Bulk Edit	...
Key	Value	Description		

Body Cookies Headers 12 Test Results 1/1 Save Response

JSON Preview Visualize

```
1 {
2   "rideId": "7f033232-d6ef-4ca8-a364-0a5d14d99a4e",
3   "passengerId": "7c2009fe-faf9-4902-9c0b-77949add408c",
4   "driverId": "6dec26de-dd09-4a4d-a364-c0fe9f36f94e",
5   "driverAccountId": "3b02ed01-fd2b-4fde-85fe-4076a21a99e1",
6   "pickup": "Wellawatte",
7   "destination": "Colombo Fort",
8   "serviceArea": "COLOMBO",
9   "distanceKm": 10.50,
10  "seatCount": 2,
11  "fareEstimateId": "0e8e01fe-7235-492d-bf29-a14f56e52ff12",
12  "estimatedFare": 1090.00,
13  "finalFare": null,
14  "currency": "LKR",
15  "status": "IN_PROGRESS",
16  "cancellationReason": null,
17  "acceptedAt": "2026-10-05T05:47:33.975206Z",
18  "startedAt": "2026-10-05T05:50:01.422233100Z",
19  "completedAt": null,
20  "cancelledAt": null,
21  "createdAt": "2026-10-05T05:47:31.157939Z",
22  "updatedAt": "2026-10-05T05:50:01.422233100Z"
23 }
```

Open Folder Terminal Console Import Complete No anomalies detected Globals Vault Tools

RideLink

PUT 03 - A PATCH 04 - PATCH 05 - GET 06 - V GET 01 - S POST 02 - GET 03 - V GET 01 - S POST 02 - GET 03 - V GET 04 - L POST 05 -

RideLink - Ride Management Service > 05 - Accept ride as driver

POST {{rideBaseUrl}} /api/v1/rides/ {{rideId}} /accept

Docs Params Authorization Headers 8 Body Scripts Settings Cookies

Headers 7 hidden

Key	Value	Description	Bulk Edit	Presets	...
Authorization	Bearer {{driverToken}}				
Key	Value	Description			

Body Cookies Headers 12 Test Results 1/1

200 OK 21 ms 1.02 KB

Save Response

JSON Preview Visualize

```
1 {
2   "rideId": "7f033232-d6ef-4ca8-a364-0a5d1d09a4e",
3   "passengerId": "7c2009fe-faf9-4902-9ceb-77949add408c",
4   "driverId": "6dec26de-dd09-4a4d-a364-c0fe9f36f04e",
5   "driverAccountId": "3b02ed01-fd2b-4fde-85fe-4076a21a99e1",
6   "pickup": "Mellawatte",
7   "destination": "Colombo Fort",
8   "serviceArea": "COLOMBO",
9   "distanceKm": 10.50,
10  "seatCount": 2,
11  "fareEstimateId": "0e8e01fe-7235-492d-bf29-a14f56e52f12",
12  "estimatedFare": 1090.00,
13  "finalFare": null,
14  "currency": "LKR",
15  "status": "ACCEPTED",
16  "cancellationReason": null,
17  "acceptedAt": "2026-10-05T05:47:33.975206200Z",
18  "startedAt": null,
19  "completedAt": null,
20  "cancelledAt": null,
21  "createdAt": "2026-10-05T05:47:31.157939Z",
22  "updatedAt": "2026-10-05T05:47:33.975206200Z"
23 }
```

COLLECTIONS

- RideLink - Account Service
- RideLink - Driver & Vehicle Service
 - GET 01 - Service status
 - POST 02 - Create my driver profile
 - PUT 03 - Add or replace my vehicle
 - PATCH 04 - Update my location
 - PATCH 05 - Go available
 - GET 06 - View my profile
 - GET 07 - Find eligible drivers
 - POST 08 - Reserve driver
 - POST 09 - Replay same reservation
 - DEL 10 - Release driver
 - GET Negative - wrong service token
 - PATCH Negative - invalid location
 - PATCH Negative - passenger cannot update driver availa...
- RideLink - Fare & Payment Service
- RideLink - Ride Management Service
 - GET 01 - Service status
 - GET 03 - View ride as passenger
 - POST 02 - Create and assign ride
 - POST Negative setup - create another assigned ride
 - GET 04 - List passenger rides
 - POST 07 - Complete ride as driver
 - POST 05 - Accept ride as driver
 - POST Negative - driver starts before accepting
 - POST 06 - Start ride as driver
 - POST Negative cleanup - cancel second ride
 - GET Negative - wrong service token
 - GET 08 - Internal ride summary
 - POST Negative - passenger cannot accept ride
 - POST Negative - no eligible driver

ENVIRONMENTS

- RideLink Local

DOCUMENTS

- SPECS
- MOCKS
- DATASETS
- TOOLSETS
- FLWS

The screenshot displays the Postman REST client interface. On the left, the 'COLLECTIONS' sidebar lists several API collections, with 'RideLink - Ride Management Service' expanded to show a sequence of requests. The 'GET 04 - List passenger rides' request is selected. Below this, the 'ENVIRONMENTS' section shows a 'RideLink Local' environment. The main workspace shows the details of the selected request: a GET call to the endpoint `{{rideBaseUrl}}/api/v1/rides?page=0&size=20`. The 'Params' tab is active, showing no parameters. The 'Body' tab shows a JSON response with a 200 OK status, 24 ms execution time, and 1.06 KB size. The JSON body contains a list of ride details, including rideId, passengerId, driverId, driverAccountId, pickup, destination, serviceArea, distanceKm, seatCount, fareEstimateId, estimatedFare, finalFare, currency, status, cancellationReason, acceptedAt, startedAt, completedAt, cancelledAt, createdAt, and updatedAt. The bottom status bar indicates 'No anomalies detected'.

```
{
  "content": [
    {
      "rideId": "83ae6c6f-271b-4f4a-aa16-62598ffdf6e1",
      "passengerId": "7c2809fe-faf9-4982-9ceb-77949add488c",
      "driverId": "57ed7a13-09a8-4f52-bf01-d57bc6e0b624",
      "driverAccountId": "8edcc1cf-6fca-407e-bc4f-1b601c259870",
      "pickup": "Wellawatte",
      "destination": "Colombo Fort",
      "serviceArea": "COLOMBO",
      "distanceKm": 10.50,
      "seatCount": 2,
      "fareEstimateId": "8e8e01fe-7235-492d-bf29-a14f56e52f12",
      "estimatedFare": 1090.00,
      "finalFare": null,
      "currency": "LKR",
      "status": "ASSIGNED",
      "cancellationReason": null,
      "acceptedAt": null,
      "startedAt": null,
      "completedAt": null,
      "cancelledAt": null,
      "createdAt": "2026-10-05T05:39:31.566385Z",
      "updatedAt": "2026-10-05T05:39:31.682317Z"
    }
  ],
  "page": 0,
  "size": 20,
  "totalElements": 1,
  "totalPages": 1
}
```

RideLink

GET 01 - Se POST 02 - C PUT 03 - A PATCH 04 - PATCH 05 - GET 06 - V GET 01 - Se POST 02 - C GET 03 - V GET 01 - Se POST 02 - C GET 03 - V + RideLink Local

RideLink - Ride Management Service > 03 - View ride as passenger

GET {{rideBaseUrl}} /api/v1/rides/ {{rideId}}

Send

Docs Params Authorization Headers 7 Body Scripts Settings Cookies

Query Params

Key	Value	Description	Bulk Edit	...
Key	Value	Description		

Body Cookies Headers 12 Test Results 200 OK 12 ms 1017 B Save Response

{ JSON Preview Visualize

```
1 {
2   "rideId": "03ae6c6f-271b-4f4a-aa16-62598ffdf6e1",
3   "passengerId": "7c2009fe-faf9-4902-9cab-77949add488c",
4   "driverId": "57ed7a13-09a8-4f52-bf01-d57bc6e0b624",
5   "driverAccountId": "8edcc1cf-6fca-407e-bc4f-1b601c259070",
6   "pickup": "Wellawatte",
7   "destination": "Colombo Fort",
8   "serviceArea": "COLOMBO",
9   "distanceKm": 10.50,
10  "seatCount": 2,
11  "fareEstimateId": "0e0e01fe-7235-492d-bf29-a14f56e52f12",
12  "estimatedFare": 1090.00,
13  "finalFare": null,
14  "currency": "LKR",
15  "status": "ASSIGNED",
16  "cancellationReason": null,
17  "acceptedAt": null,
18  "startedAt": null,
19  "completedAt": null,
20  "cancelledAt": null,
21  "createdAt": "2026-10-05T05:39:31.566385Z",
22  "updatedAt": "2026-10-05T05:39:31.602317Z"
23 }
```

Open Folder Terminal Console Import Complete No anomalies detected Globals Vault Tools

The screenshot displays the Postman REST client interface. On the left, the 'RideLink - Ride Management Service' collection is expanded, showing a sequence of requests. The selected request is 'POST 02 - Create and assign ride'. The top bar shows the request method 'POST' and the URL template '[[rideBaseUrl]]/api/v1/rides'. The 'Params' tab is active, showing a single parameter 'rideBaseUrl' with the value 'http://localhost:3000'. The 'Body' tab is selected, showing a JSON payload. The response is a 201 Created status with a JSON body containing ride details.

Request:

```
POST {{rideBaseUrl}}/api/v1/rides
```

Body (JSON):

```
{  "rideId": "83ae6c6f-271b-4f4a-aa16-62598ffdf6e1",  "passengerId": "7c2899fe-faf9-4982-9ceb-77949add488c",  "driverId": "57ed7a13-89a8-4f52-bf01-d57bc6e8b624",  "driverAccountId": "8adcc1cf-6fca-487e-bc4f-1b601c259878",  "pickup": "Wellawatte",  "destination": "Colombo Fort",  "serviceArea": "COLOMBO",  "distanceKm": 18.50,  "seatCount": 2,  "fareEstimateId": "0e8e81fe-7235-492d-bf29-a14f56e52f12",  "estimatedFare": 1990.80,  "finalFare": null,  "currency": "LKR",  "status": "ASSIGNED",  "cancellationReason": null,  "acceptedAt": null,  "startedAt": null,  "completedAt": null,  "cancelledAt": null,  "createdAt": "2026-10-05T05:39:31.566384889Z",  "updatedAt": "2026-10-05T05:39:31.692317289Z"}
```

Response:

```
201 Created • 565 ms • 1.01 KB
```

```
{  "rideId": "83ae6c6f-271b-4f4a-aa16-62598ffdf6e1",  "passengerId": "7c2899fe-faf9-4982-9ceb-77949add488c",  "driverId": "57ed7a13-89a8-4f52-bf01-d57bc6e8b624",  "driverAccountId": "8adcc1cf-6fca-487e-bc4f-1b601c259878",  "pickup": "Wellawatte",  "destination": "Colombo Fort",  "serviceArea": "COLOMBO",  "distanceKm": 18.50,  "seatCount": 2,  "fareEstimateId": "0e8e81fe-7235-492d-bf29-a14f56e52f12",  "estimatedFare": 1990.80,  "finalFare": null,  "currency": "LKR",  "status": "ASSIGNED",  "cancellationReason": null,  "acceptedAt": null,  "startedAt": null,  "completedAt": null,  "cancelledAt": null,  "createdAt": "2026-10-05T05:39:31.566384889Z",  "updatedAt": "2026-10-05T05:39:31.692317289Z"}
```

Postman interface showing a REST client request for the RideLink API.

Request Details:

- Method: GET
- URL: `{{rideBaseUrl}}/api/v1/status`
- Environment: RideLink Local

Query Params:

Key	Value	Description	Bulk Edit
Key	Value	Description	

Response (Body):

```
{
  "service": "Ride Management Service",
  "timestamp": "2026-10-05T05:39:09.426402800Z",
  "status": "UP"
}
```

Status: 200 OK, 6 ms, 478 B

Negative Tests

The screenshot displays a REST client interface with a sidebar on the left containing a tree view of collections and environments. The main panel shows a GET request to the endpoint `{{(rideBaseUrl)}/internal/v1/rides/{{(rideId)}}/summary`. The response is a 401 Unauthorized status with a JSON body indicating an invalid service token.

Request:

- Method: GET
- URL: `{{(rideBaseUrl)}/internal/v1/rides/{{(rideId)}}/summary`

Response:

Status: 401 Unauthorized (2 ms, 667 B)

Body (JSON):

```
1 {
2   "timestamp": "2026-10-05T05:53:39.337971Z",
3   "status": 401,
4   "code": "INVALID_SERVICE_TOKEN",
5   "message": "The service token is missing or invalid",
6   "path": "/internal/v1/rides/7f033232-d6ef-4ca8-a364-0a5d14d09a4e/summary",
7   "correlationId": "792a0018-c8b1-4909-9f67-01e95e06e144",
8   "fieldErrors": []
9 }
```

Postman interface showing a REST client request for the RideLink API. The request is a POST to the endpoint `{{(rideBaseUrl)} /api/v1/rides/ {{(rideId)}} /accept`. The response is a 403 Forbidden status with a JSON body indicating an access denial.

Request Details:

- Method: POST
- URL: `{{(rideBaseUrl)} /api/v1/rides/ {{(rideId)}} /accept`
- Params: None
- Body: None

Response Details:

- Status: 403 Forbidden
- Time: 4 ms
- Size: 660 B
- Body (JSON):

```
{  "timestamp": "2026-10-05T05:53:29.862155700Z",  "status": 403,  "code": "ACCESS_DENIED",  "message": "You do not have permission for this request",  "path": "/api/v1/rides/7f833232-d6ef-4ca8-a364-8a5d14d09a4e/accept",  "correlationId": "43ee9351-9c03-494e-8a27-869d1f6a8435",  "fieldErrors": []}
```

Left Panel (Collections):

- RideLink - Account Service
 - RideLink - Driver & Vehicle Service
 - RideLink - Fare & Payment Service
- RideLink - Ride Management Service
 - GET 01 - Service status
 - GET 03 - View ride as passenger
 - POST 02 - Create and assign ride
 - POST Negative setup - create another assigned ride
 - GET 04 - List passenger rides
 - POST 07 - Complete ride as driver
 - POST 05 - Accept ride as driver
 - POST Negative - driver starts before accepting
 - POST 06 - Start ride as driver
 - POST Negative cleanup - cancel second ride
 - GET Negative - wrong service token
 - GET 08 - Internal ride summary
 - POST Negative - passenger cannot accept ride
 - POST Negative - no eligible driver

Left Panel (Environments):

- RideLink Local

Left Panel (Documents):

- SPECS
- MOCKS
- DATASETS
- TOOLSETS
- FLows

Postman interface showing a REST client request for the RideLink API. The request is a GET call to `{{fareBaseUrl}}/internal/v1/fares/estimates/{{estimateId}}` under the "Negative - wrong service token" collection.

The request is configured with the following parameters:

- Method: GET
- URL: `{{fareBaseUrl}}/internal/v1/fares/estimates/{{estimateId}}`
- Params: Empty
- Headers: Empty
- Body: Empty
- Scripts: Empty
- Settings: Empty

The response is a 401 Unauthorized status, indicating an invalid service token. The response body is as follows:

```
1 {
2   "timestamp": "2026-10-05T05:53:17.629943200Z",
3   "status": 401,
4   "code": "INVALID_SERVICE_TOKEN",
5   "message": "The service token is missing or invalid",
6   "path": "/internal/v1/fares/estimates/0e8e81fe-7235-492d-bf29-a14f56e52f12",
7   "correlationId": "unknown",
8   "fieldErrors": []
9 }
```

Postman interface showing a REST client request for the endpoint `POST {{fareBaseUrl}} /api/v1/fares/estimates` under the collection `RideLink - Fare & Payment Service`. The request is labeled `Negative - invalid distance`.

The **Params** tab is active, showing a table for Query Params:

Key	Value	Description	Bulk Edit
Key	Value	Description	

The **Body** tab is active, showing a `400 Bad Request` response. The response body is a JSON object:

```
1 {
2   "timestamp": "2026-10-05T05:53:07.812374Z",
3   "status": 400,
4   "code": "VALIDATION_FAILED",
5   "message": "One or more fields are invalid",
6   "path": "/api/v1/fares/estimates",
7   "correlationId": "3261b3d5-bd29-4600-b3c6-4aaa72979c8",
8   "fieldErrors": [
9     {
10      "field": "distanceKm",
11      "message": "Distance must be at least 0.10 km"
12    }
13  ]
14 }
```

Postman interface showing a REST client request for the RideLink API.

Request Details:

- Method: PATCH
- URL: `{{driverBaseUrl}}/api/v1/drivers/me/availability`
- Environment: RideLink Local

Query Params:

Key	Value	Description	Bulk Edit
Key	Value	Description	

Response (403 Forbidden):

```
{
  "timestamp": "2026-10-05T05:52:55.693496800Z",
  "status": 403,
  "code": "ACCESS_DENIED",
  "message": "You do not have permission for this request",
  "path": "/api/v1/drivers/me/availability",
  "correlationId": "617bf84b-c4e4-4aea-9832-fd48b3ec151c",
  "fieldErrors": []
}
```

RideLink

GET 04 - L POST 05 - POST 06 - POST 07 - GET 08 - In GET 04 - V POST 05 - GET 06 - R RideLink GET 12 - W GET Negat PATCH Neg + RideLink Local

RideLink - Driver & Vehicle Service Negative - invalid location

PATCH {{driverBaseUrl}} /api/v1/drivers/me/location Send

Docs Params Authorization Headers 10 Body Scripts Settings Cookies

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 11 Test Results 400 Bad Request 47 ms · 775 B Save Response

Add required fields to body

JSON Preview Debug with AI

```
1 {
2   "timestamp": "2026-10-05T05:52:44.791657700Z",
3   "status": 400,
4   "code": "VALIDATION_FAILED",
5   "message": "One or more fields are invalid",
6   "path": "/api/v1/drivers/me/location",
7   "correlationId": "fd75a224-2cf6-4969-9fec-1a18416c8492",
8   "fieldErrors": [
9     {
10      "field": "serviceArea",
11      "message": "must not be blank"
12    },
13    {
14      "field": "locationName",
15      "message": "must not be blank"
16    },
17    {
18      "field": "latitude",
19      "message": "must be less than or equal to 90.0"
20    }
21  ]
22 }
```

Open Folder Terminal Console Import Complete Add required fields to body Github Vault Tools

GET Negative - wrong service token

GET `{{(driverBaseUri)}}/internal/v1/drivers/eligible?serviceArea=COLOMBO&seatCount=2`

Params

Key	Value	Description	Bulk Edit
serviceArea	COLOMBO		
seatCount	2		

Body

401 Unauthorized · 3 ms · 636 B

Thinking...

JSON

```
1 {
2   "timestamp": "2026-10-05T05:52:35.978898790Z",
3   "status": 401,
4   "code": "INVALID_SERVICE_TOKEN",
5   "message": "The service token is missing or invalid",
6   "path": "/internal/v1/drivers/eligible",
7   "correlationId": "a65a8d30-f954-4bf2-90de-4d37aa419d4b",
8   "fieldErrors": []
9 }
```

Postman interface showing a REST client request for the RideLink Account Service. The request is a GET method to the endpoint `{{(accountBaseUrl)}}/internal/v1/accounts/{{(driverAccountId)}}/summary`. The response is a 401 Unauthorized status with a JSON body indicating an invalid service token.

Request Details:

- Method: GET
- URL: `{{(accountBaseUrl)}}/internal/v1/accounts/{{(driverAccountId)}}/summary`
- Params: None

Response Details:

- Status: 401 Unauthorized
- Body (JSON):

```
{  "timestamp": "2026-10-05T05:52:17.046707500Z",  "status": 401,  "code": "INVALID_SERVICE_TOKEN",  "message": "The service token is missing or invalid",  "path": "/internal/v1/accounts/3b02ed01-fd2b-4fde-85fe-4076a21a99e1/summary",  "correlationId": "47b891f9-990e-4468-a25d-995cb1e17e31",  "fieldErrors": []}
```

Automated Tests

Account Service

```
Command Prompt - .\mvnw.c x + v
an : Initialized JPA EntityManagerFactory for persistence unit 'default'
2026-10-05T11:36:09.643+05:30 INFO 13208 --- [account-service] [main] o.s.b.a.e.web.EndpointLinksResolver
: Exposing 2 endpoints beneath base path '/actuator'
2026-10-05T11:36:09.655+05:30 INFO 13208 --- [account-service] [main] c.r.a.AccountServiceApplicationTests
: Started AccountServiceApplicationTests in 0.797 seconds (process running for 10.999)
2026-10-05T11:36:09.657+05:30 WARN 13208 --- [account-service] [main] o.s.core.events.SpringDocAppInitialize
r : SpringDoc /v3/api-docs endpoint is enabled by default. To disable it in production, set the property 'springdoc.api
-docs.enabled=false'
2026-10-05T11:36:09.657+05:30 WARN 13208 --- [account-service] [main] o.s.core.events.SpringDocAppInitialize
r : SpringDoc /swagger-ui.html endpoint is enabled by default. To disable it in production, set the property 'springdoc
.swagger-ui.enabled=false'
[INFO] Tests run: 1, Failures: 0, Errors: 0, Skipped: 0, Time elapsed: 0.812 s -- in com.ridelink.account.AccountService
ApplicationTests
[INFO] Running com.ridelink.account.config.AdminBootstrapTests
[INFO] Tests run: 2, Failures: 0, Errors: 0, Skipped: 0, Time elapsed: 0.623 s -- in com.ridelink.account.config.AdminBo
otstrapTests
[INFO] Results:
[INFO] Tests run: 10, Failures: 0, Errors: 0, Skipped: 0
[INFO] BUILD SUCCESS
[INFO] Total time: 15.888 s
[INFO] Finished at: 2026-10-05T11:36:10+05:30
[INFO]
D:\RideLink\account-service>
D:\RideLink\account-service>
```

Driver Vehicle Service

```
Command Prompt - .\mvnw.c x + v
: HH000489: No JTA platform available (set 'hibernate.transaction.jta.platform' to enable JTA platform integr
ation)
2026-10-05T11:38:16.451+05:30 INFO 46676 --- [driver-vehicle-service] [main] j.LocalContainerEntityManagerFa
ctoryBean : Initialized JPA EntityManagerFactory for persistence unit 'default'
2026-10-05T11:38:16.772+05:30 INFO 46676 --- [driver-vehicle-service] [main] o.s.b.a.e.web.EndpointLinksReso
lver : Exposing 2 endpoints beneath base path '/actuator'
2026-10-05T11:38:16.789+05:30 INFO 46676 --- [driver-vehicle-service] [main] r.d.DriverVehicleServiceApplica
tionTests : Started DriverVehicleServiceApplicationTests in 0.904 seconds (process running for 13.496)
2026-10-05T11:38:16.790+05:30 WARN 46676 --- [driver-vehicle-service] [main] o.s.core.events.SpringDocAppIni
tializer : SpringDoc /v3/api-docs endpoint is enabled by default. To disable it in production, set the property 'spring
doc.api-docs.enabled=false'
2026-10-05T11:38:16.790+05:30 WARN 46676 --- [driver-vehicle-service] [main] o.s.core.events.SpringDocAppIni
tializer : SpringDoc /swagger-ui.html endpoint is enabled by default. To disable it in production, set the property 'sp
ringdoc.swagger-ui.enabled=false'
[INFO] Tests run: 1, Failures: 0, Errors: 0, Skipped: 0, Time elapsed: 0.926 s -- in com.ridelink.driver.DriverVehicleSe
rviceApplicationTests
[INFO] Results:
[INFO] Tests run: 8, Failures: 0, Errors: 0, Skipped: 0
[INFO] BUILD SUCCESS
[INFO] Total time: 18.279 s
[INFO] Finished at: 2026-10-05T11:38:17+05:30
[INFO]
D:\RideLink\driver-vehicle-service>
D:\RideLink\driver-vehicle-service>
```

Ride Management Service

```
Command Prompt - .\mvnw.c x + v
2026-10-05T11:39:32.308+05:30 INFO 46816 --- [ride-management-service] [main] org.hibernate.orm.core
: HHH000489: No JTA platform available (set 'hibernate.transaction.jta.platform' to enable JTA platform integ
ration)
2026-10-05T11:39:32.312+05:30 INFO 46816 --- [ride-management-service] [main] j.LocalContainerEntityManagerF
actoryBean : Initialized JPA EntityManagerFactory for persistence unit 'default'
2026-10-05T11:39:33.262+05:30 INFO 46816 --- [ride-management-service] [main] o.s.b.a.e.web.EndpointLinksRes
olver : Exposing 2 endpoints beneath base path '/actuator'
2026-10-05T11:39:33.281+05:30 INFO 46816 --- [ride-management-service] [main] .r.RideManagementServiceApplic
ationTests : Started RideManagementServiceApplicationTests in 1.566 seconds (process running for 13.502)
2026-10-05T11:39:33.282+05:30 WARN 46816 --- [ride-management-service] [main] o.s.core.events.SpringDocAppIn
itializer : SpringDoc /v3/api-docs endpoint is enabled by default. To disable it in production, set the property 'sprin
gdoc.api-docs.enabled=false'
2026-10-05T11:39:33.282+05:30 WARN 46816 --- [ride-management-service] [main] o.s.core.events.SpringDocAppIn
itializer : SpringDoc /swagger-ui.html endpoint is enabled by default. To disable it in production, set the property 's
pringdoc.swagger-ui.enabled=false'
[INFO] Tests run: 1, Failures: 0, Errors: 0, Skipped: 0, Time elapsed: 1.585 s -- in com.ridelink.ride.RideManagementSer
viceApplicationTests
[INFO] Results:
[INFO] Tests run: 7, Failures: 0, Errors: 0, Skipped: 0
[INFO] BUILD SUCCESS
[INFO] Total time: 18.476 s
[INFO] Finished at: 2026-10-05T11:39:33+05:30
[INFO]
D:\RideLink\ride-management-service>
```

Fare Payment Service

```
Command Prompt - .\mvnw.c x + v
2026-10-05T11:41:02.139+05:30 INFO 41680 --- [fare-payment-service] [main] org.hibernate.orm.core
: HHH000489: No JTA platform available (set 'hibernate.transaction.jta.platform' to enable JTA platform integrat
ion)
2026-10-05T11:41:02.144+05:30 INFO 41680 --- [fare-payment-service] [main] j.LocalContainerEntityManagerFact
oryBean : Initialized JPA EntityManagerFactory for persistence unit 'default'
2026-10-05T11:41:02.623+05:30 INFO 41680 --- [fare-payment-service] [main] o.s.b.a.e.web.EndpointLinksResolv
er : Exposing 2 endpoints beneath base path '/actuator'
2026-10-05T11:41:02.641+05:30 INFO 41680 --- [fare-payment-service] [main] c.r.f.FarePaymentServiceApplicati
onTests : Started FarePaymentServiceApplicationTests in 1.041 seconds (process running for 12.177)
2026-10-05T11:41:02.643+05:30 WARN 41680 --- [fare-payment-service] [main] o.s.core.events.SpringDocAppIniti
alizer : SpringDoc /v3/api-docs endpoint is enabled by default. To disable it in production, set the property 'springdo
c.api-docs.enabled=false'
2026-10-05T11:41:02.643+05:30 WARN 41680 --- [fare-payment-service] [main] o.s.core.events.SpringDocAppIniti
alizer : SpringDoc /swagger-ui.html endpoint is enabled by default. To disable it in production, set the property 'sprin
gdoc.swagger-ui.enabled=false'
[INFO] Tests run: 1, Failures: 0, Errors: 0, Skipped: 0, Time elapsed: 1.060 s -- in com.ridelink.fare.FarePaymentServic
eApplicationTests
[INFO] Results:
[INFO] Tests run: 7, Failures: 0, Errors: 0, Skipped: 0
[INFO] BUILD SUCCESS
[INFO] Total time: 16.988 s
[INFO] Finished at: 2026-10-05T11:41:03+05:30
[INFO]
D:\RideLink\fare-payment-service>
```