
Event-driven agent workflow with durable state

Original asynchronous design | message identity, task dispatch, and recovery state are explicit

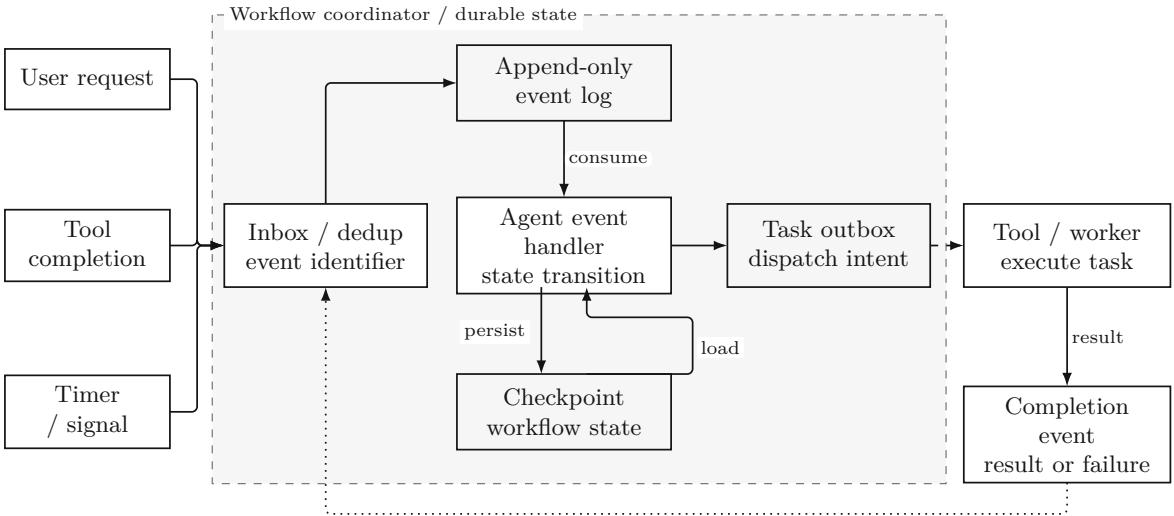

Events drive state transitions and task dispatch; deduplication and recovery depend on persistence and worker semantics.