
Distributed inference with tensor-parallel serving

Conceptual serving path | one replica; two illustrative ranks; rank count and placement vary

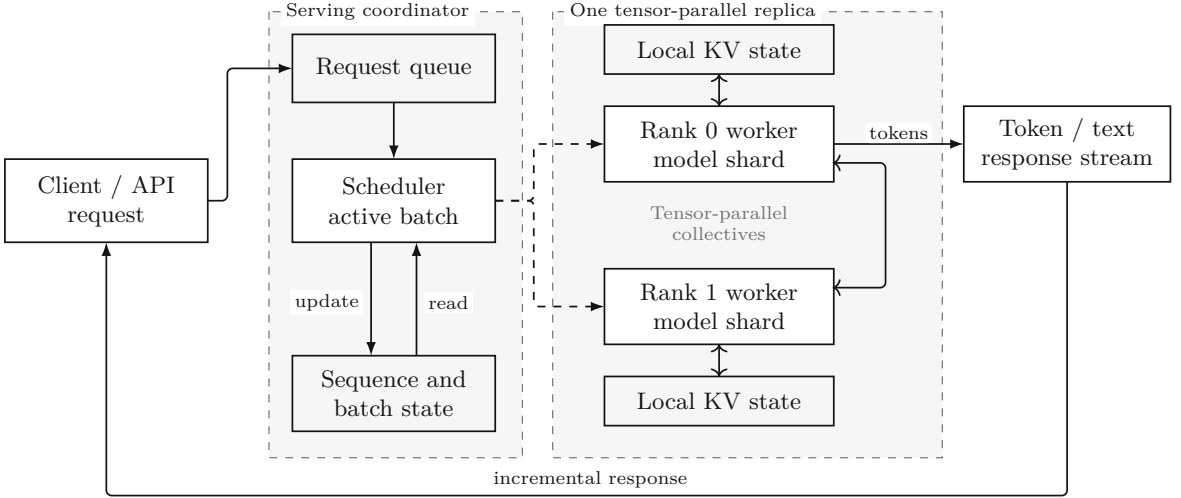

KV arrows denote per-rank state access; read/write details and token-selection placement are abstracted.

A scheduler dispatches active sequences to a tensor-parallel replica; local KV state supports iterative token generation.