
Resampling with gated visual cross-attention

Flamingo-style conceptual block: a fixed latent set connects variable visual inputs to a pretrained language stream.

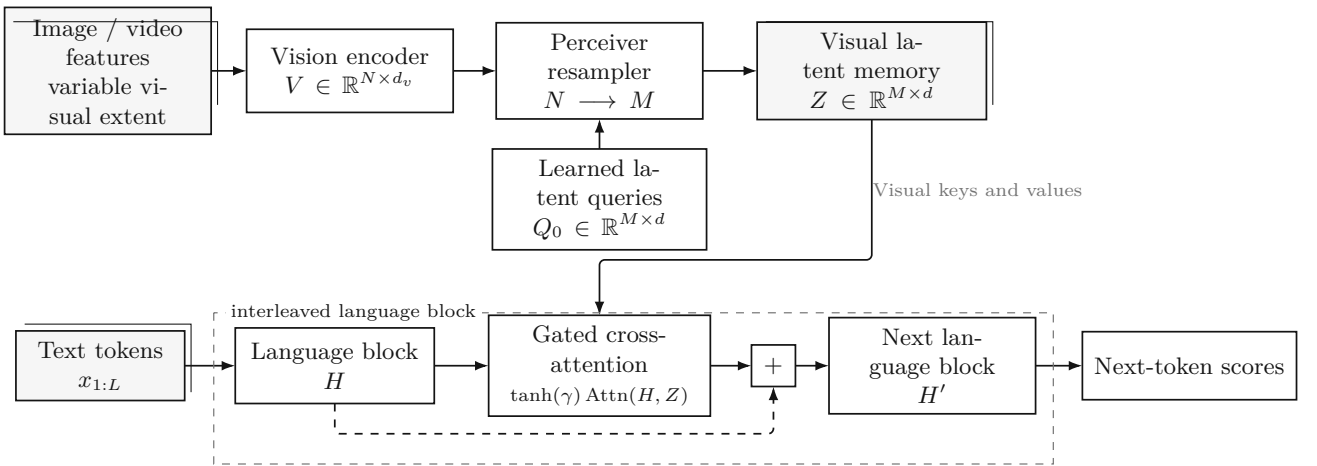

Learned latent queries resample vision features; text queries read those latents through a gated residual path.