
Vision-language-action policy

RT-2-style conceptual inference loop: visual observations and a language goal condition action symbols.

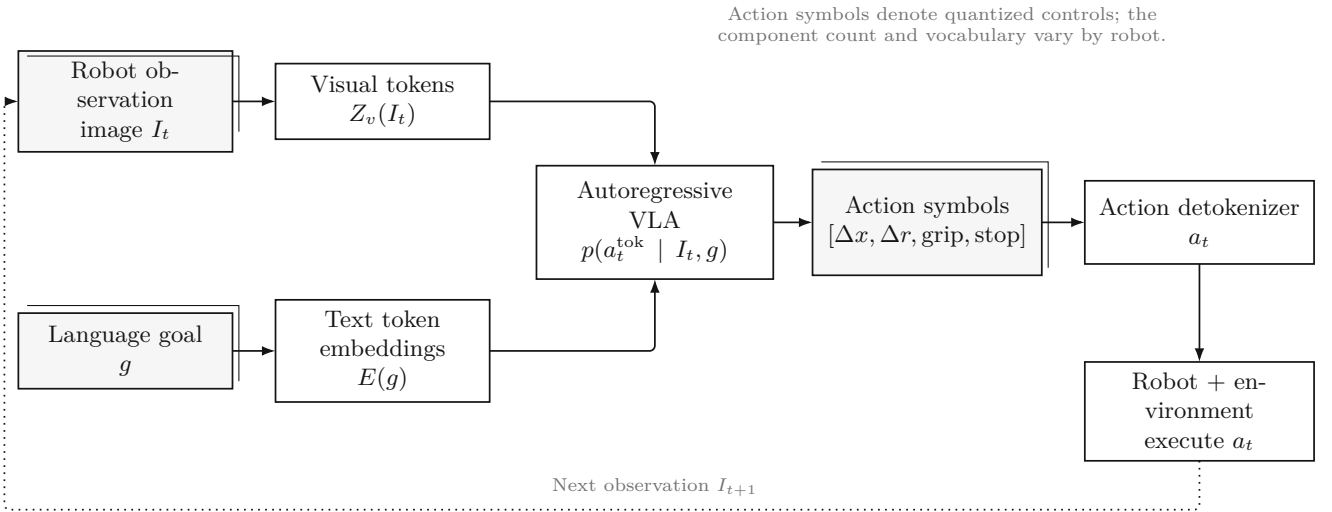

The policy emits discrete action tokens, which are decoded into a control command before the next observation arrives.