
Cross-attention with a query-stream residual

Conceptual schematic; symbolic dimensions; batch axis omitted

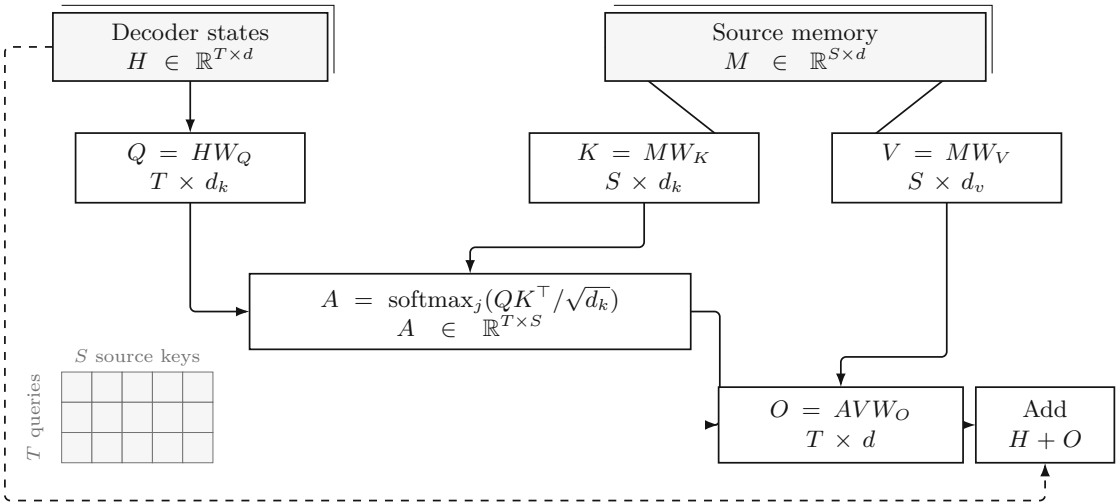

The output has the query length; the identity path starts at the decoder state, before query projection.