
QLoRA: quantized base storage, higher-precision computation

Conceptual schematic; symbolic dimensions; batch axis omitted

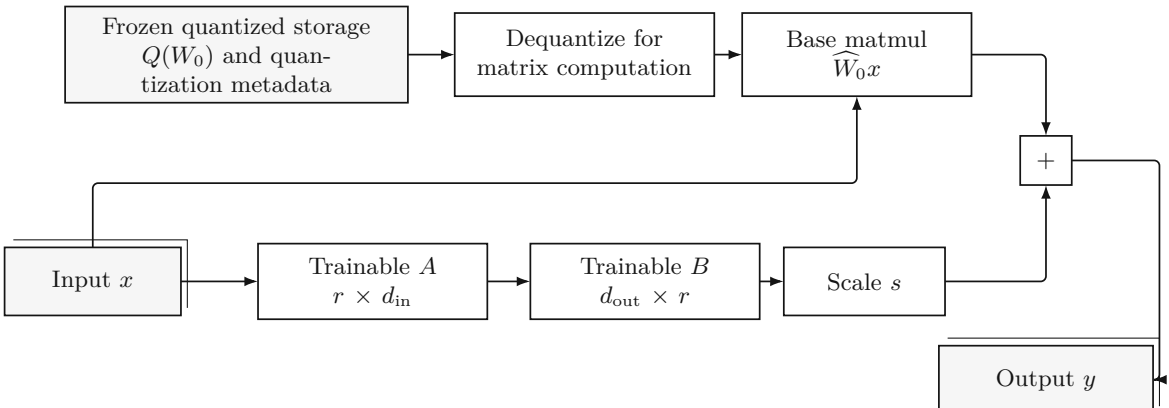

$$\widehat{W}_0 \quad = \quad \text{dequant}(Q(W_0)), \qquad y \quad = \quad \widehat{W}_0 x \; + \; sBAx$$

Quantized base parameters stay frozen; adapters receive parameter updates while gradients can pass through the computation.