
Adversarial generation: two models, one learning game

Conceptual architecture | original schematic | symbolic dimensions

$$V \quad = \quad \mathbb{E}_x \log D(x) \; + \; \mathbb{E}_z \log(1 \; - \; D(G(z)))$$

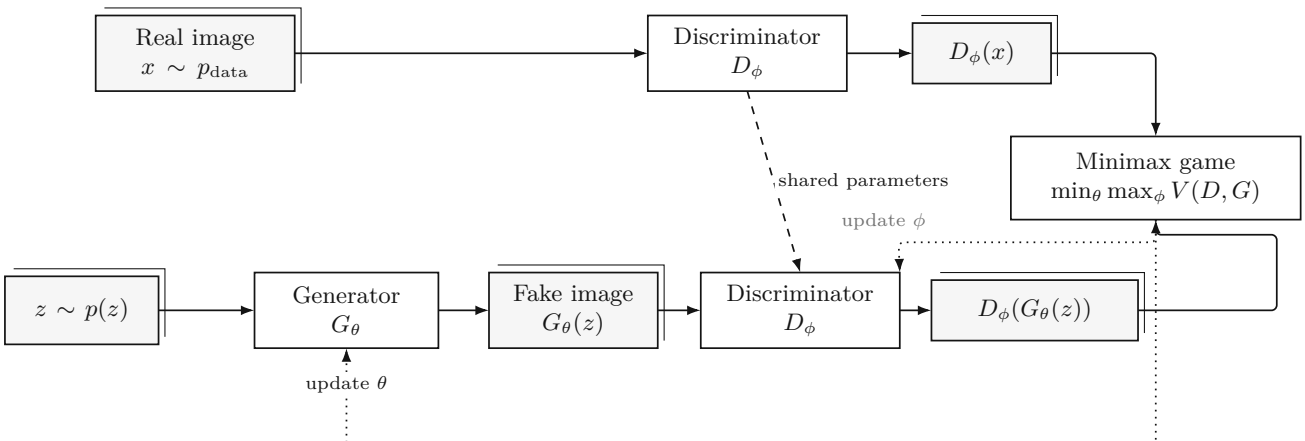

The discriminator shares parameters across real and generated examples; gradient feedback updates both players.