
Latent diffusion: denoise a compressed image representation

Conceptual architecture | original schematic | symbolic dimensions

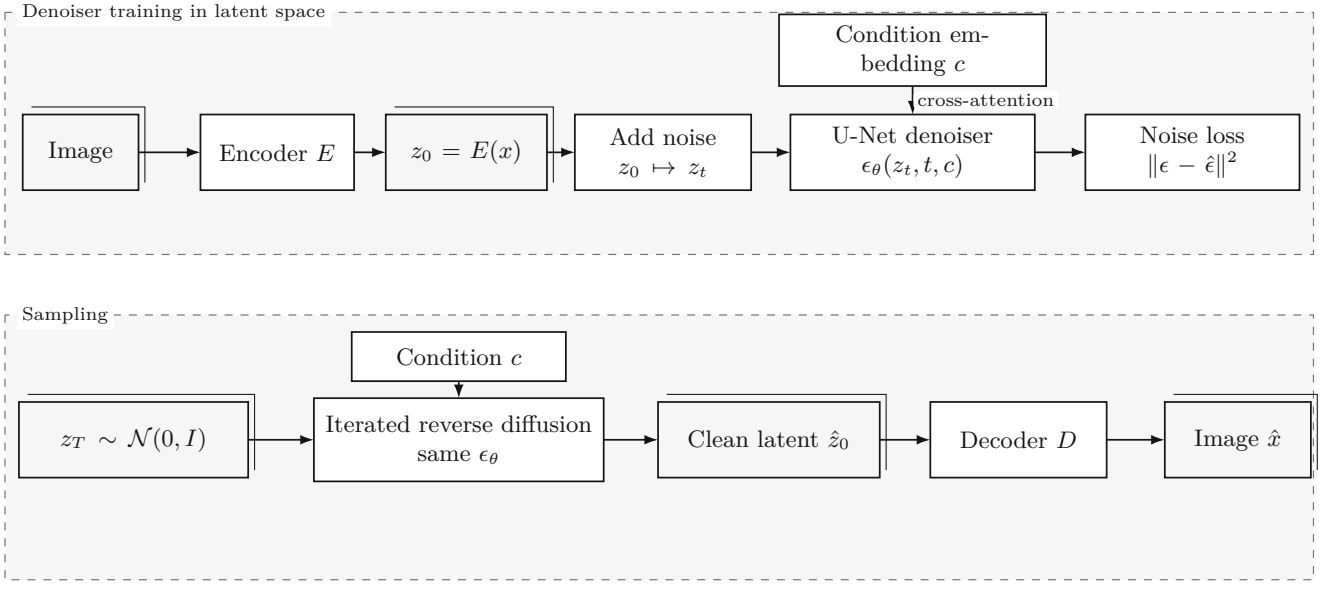

The autoencoder is pretrained before learning the latent denoising model.

An autoencoder defines latent space; a conditioned denoiser learns there and its reverse process feeds the decoder.