Message-passing graph network

Separate edge messages, neighborhood aggregation, and node updates.

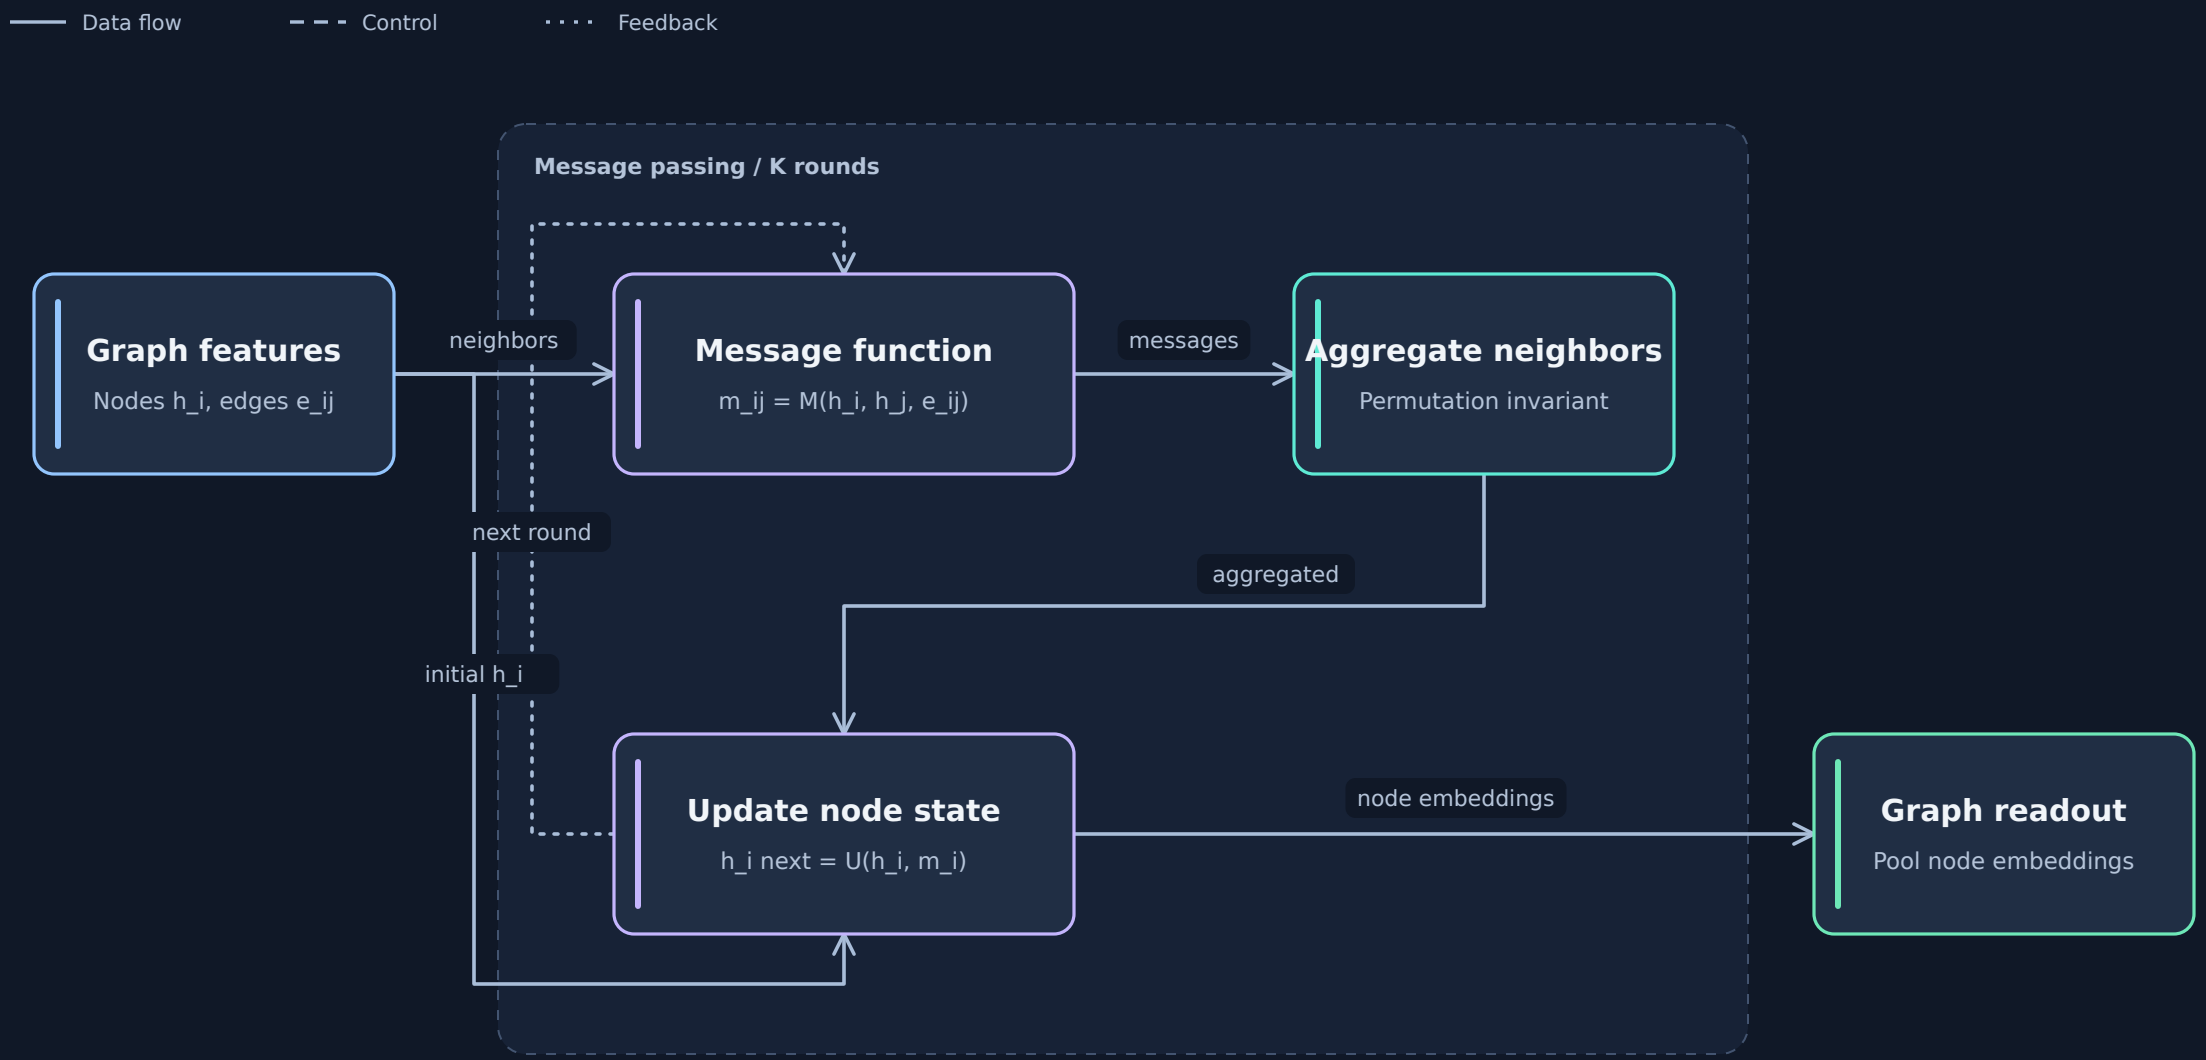

M and U are task-dependent functions; readout can be omitted for node-level prediction.