


The decomposition re-aggregated within each subgroup, on population-level operators

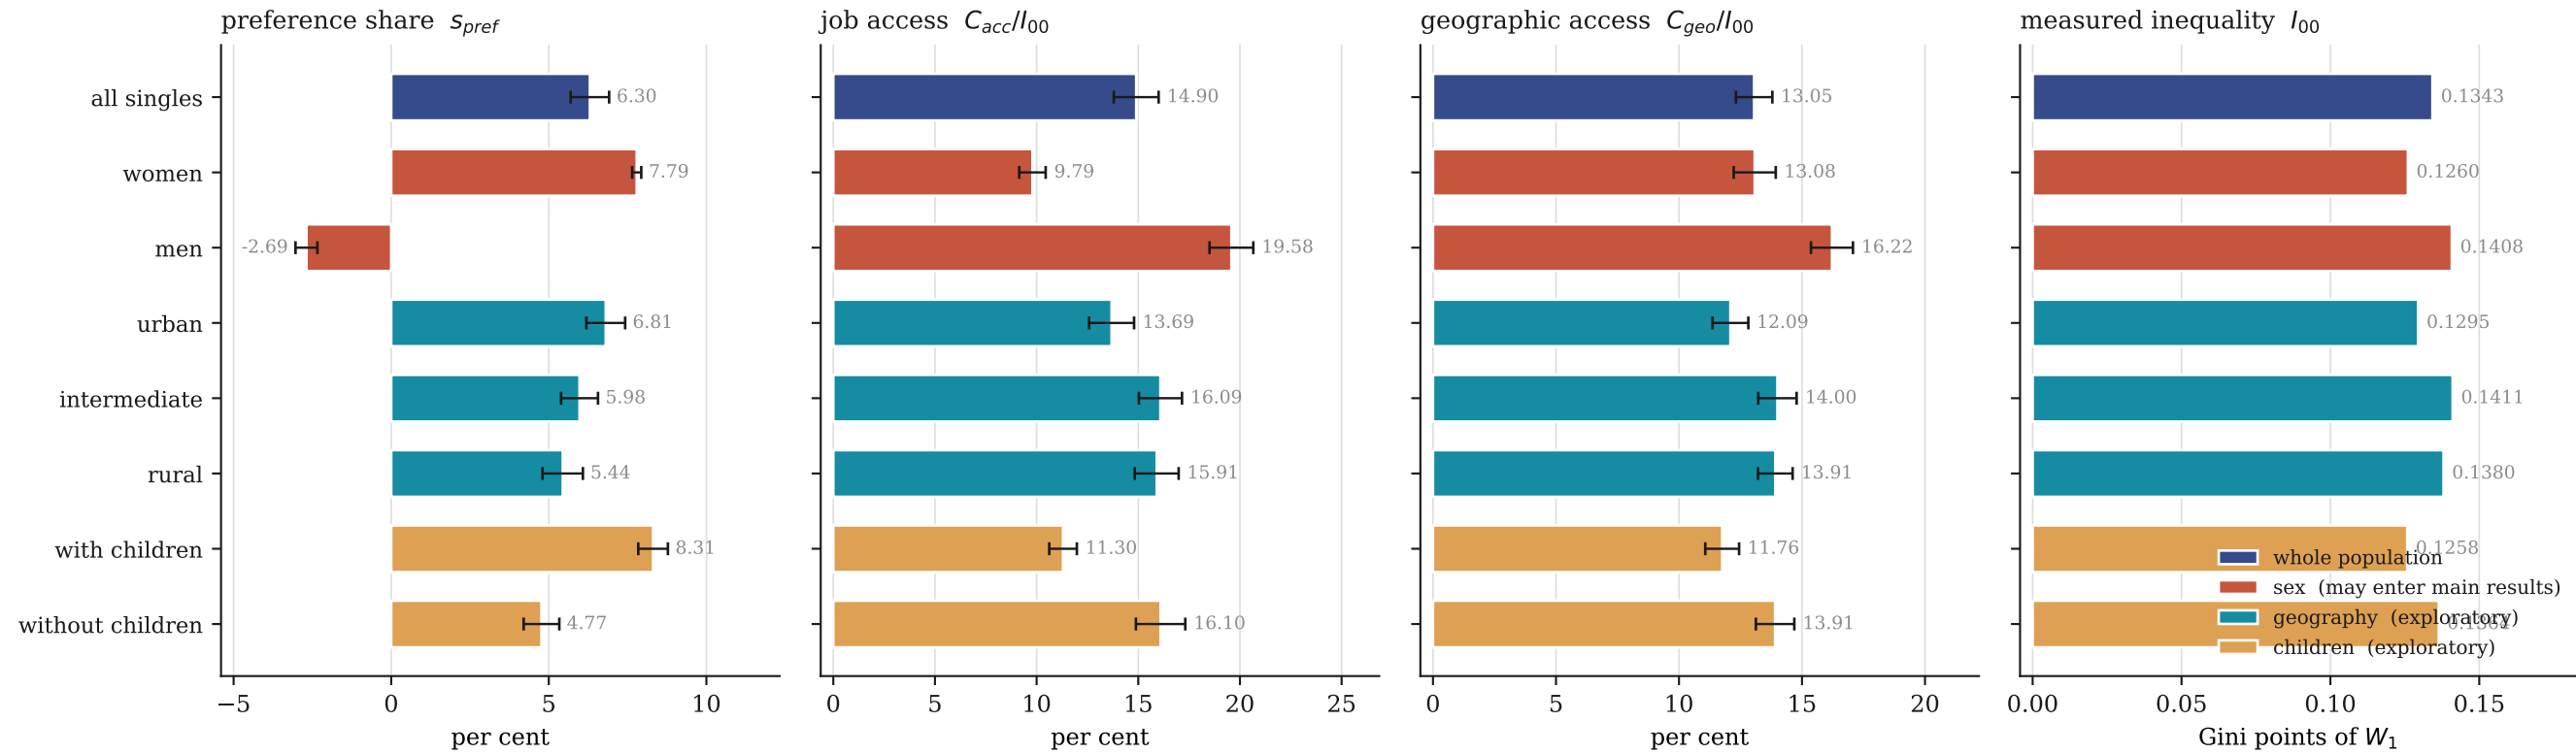

THE OPERATORS ARE POPULATION-LEVEL. Every reference object -- the substituted argument vector, the reference preference block, the frozen occupation joint with its dwt population SEX shares, and the channel-D medoid profile with its equivalence scale -- is computed once over the whole singles population and is COMMON to every group. A subgroup number therefore answers how much of THAT group's own money-metric inequality is removed by moving its households to the COMMON population reference; it does not answer what a within-group reference would give, which is a different estimand and is not computed. The Gini is recomputed inside the group; bands are the eight-scramble delete-one jackknife (integration precision) computed inside the group, and carry no parameter uncertainty. Exhaustiveness and the three accounting identities are re-checked in every group: 32/32 cells PASS. Female-primary reference; raw basis. EXPLORATORY\_PENDING\_DEPUTY\_ADMISSION