Permutation of String ⇒

"xy" all permutations ⇒ x y / y x

"abc" ⟶ ⇒

a	b	c
b	a	c
c	b	a
a	c	b
c	a	b
b	c	a

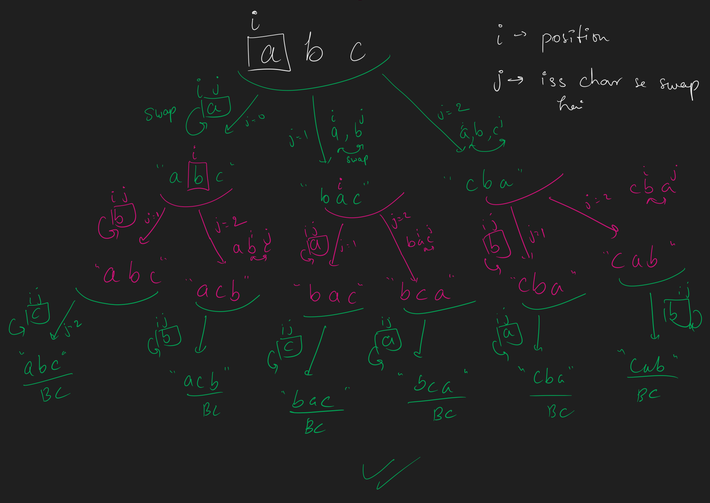

⇒ In Code ⇒ Concept of Backtracking ⇒

```
swap( str[i], str[j])
permutation( str, i+1);
swap ( str[i], str[j])
```

① ⇒* firstly, in actual the execution program runs & complete 1 side tree.



② * we had pass the string "by reference".

Now

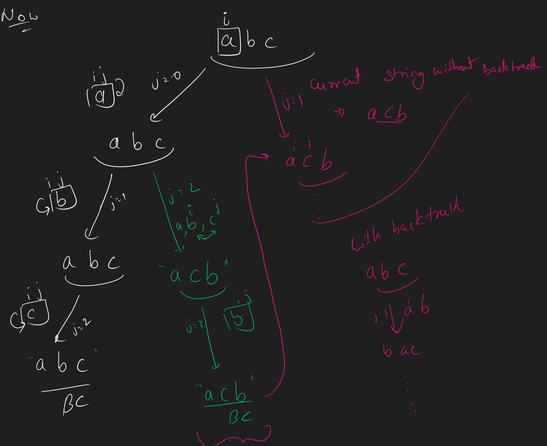

Now string is change from abc to acb through by reference. so we have to "swap again" to back to normal form ⇒ backtrack.

otherwise it will operate on string "acb"