```
Rsort array
```

```
Code:
```

```
<?php
```


\$arr = array(10,21,9,40,36);

rsort(\$arr);

print_r(\$arr);

?>

Output:



Array change key change case

Code:

```
<?php
```

\$arr = array(

"Ketan" => "Handsome",


"Druvil" => "singer",

```
"Jay "=> "dancer");

$uppercase = array_change_key_case($arr,CASE_UPPER);

print_r($uppercase);

?>
```




Array ([KETAN] => Handsome [DRUVIL] => singer [JAY] => dancer)

Compact array

Code:

```
<?php
$name = "Hitesh";
$subject = "php";
$arr = compact("name", "subject");
print_r($arr);
?>
```



Array ([name] => Hitesh [subject] => php)

```
Code:
```

```
<?php
```


\$mystring = "I Love PHP Language";

\$arr = explode(" ",\$mystring);

print_r(\$arr);

?>

Output:




Array ([0] => I [1] => Love [2] => PHP [3] => Language)

```
Reverce array
```

Code:

```
<?php
$arr = array('1','2','3','4','5');
$revarr = array_reverse($arr);
print_r($revarr);
?>
```


Output:

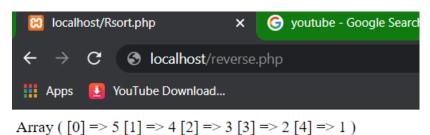

Count array

Code:

```
<?php
$arr = array('1','2','13','42','12','6','17');
echo count($arr);
?>
```



7

Product array

Code:


<?php

\$myarray = array(10,20,30,40,50);

echo array_product(\$myarray);

?>

Output:



18000000

Push array

Code:

<?php

\$a=array("Android","Python");


```
array_push($a,"Php","C");
print_r($a);
?>
```

Output:

```
    Iocalhost/Rsort.php
    ★ → C  localhost/push.php
    Apps  YouTube Download...
```

Array ([0] => Android [1] => Python [2] => Php [3] => C)

```
Value array
Code:
<?php
$arr = array("i"=>"c","want"=>"PHP","learn"=>"ANDROID");
$myarr = array_values($arr);
foreach($myarr as $key => $value) {
  echo " <br />$key - $value";
}
?>
```



- 0 c
- 1 PHP
- 2 ANDROID