

## Functional design

Hivos IATI for The Netherlands Ministry of Foreign Affairs

> Barry de Graaff Annemarie Stolp

Version 2.2 - July 20, 2018

## **Table of Contents**

Introduction	4
Scope	
Requirements	
Program Funding Use Case	
Osiris contracts	
Osiris Business Partners	7
IATI Identifier	7
IATI Activity file	8
Activities	8
(4.1.1) iati-activities	8
(4.1.2) iati-activities→iati-activity	8
(4.1.3) iati-activities→iati-activity→reporting-org	
(4.1.3) iati-activities→iati-activity→iati-identifier	
(4.1.4) iati-activities→iati-activity→title	
(4.1.4) iati-activities→iati-activity→description->narrative	9
(4.1.4) iati-activities→iati-activity→activity-status	9
(4.1.4) iati-activities→iati-activity→activity-date	
(4.1.4) iati-activities→iati-activity→contact-info	
(4.1.4) iati-activities→iati-activity→contact-info->telephone	
(4.1.4) iati-activities→iati-activity→contact-info->email	
Assessment (webform)	
IATI all baseline data	
IATI result data	
Report for staff overview	
(4.1.5) iati-activities→iati-activity→participating-org	
(4.1.6) iati-activities→iati-activity→recipient-country	
(4.1.6) iati-activities→iati-activity→recipient-region	
(4.1.7) iati-activities→iati-activity→sector	
(4.1.7) iati-activities →iati-activity →policy-marker	
(4.1.7) iati-activities →iati-activity →default-flow-type	
(4.1.7) iati-activities→iati-activity→default-finance-type	
(4.1.7) iati-activities→iati-activity→default-infance-type	
(4.1.7) iati-activities→iati-activity→default-tied-status	
Budget	10
(4.1.8) iati-activities→iati-activity→budget	20
(4.1.8) iati-activities→iati-activity→budget→value	
Transactions4.1.8) iati-activities→iati-activity→transaction (type 1)	27
4.1.8) iati-activities→iati-activity→transaction→value	
4.1.8) iati-activities→iati-activity→transaction (type 11)	. Z 5
4.1.8) iati-activities→iati-activity→transaction→value	. 23
4.1.8) iati-activities → iati-activity → transaction (type 3 or 4)	
4.1.8) iati-activities→iati-activity→transaction→value	
4.1.8) iati-activities→iati-activity→transaction (type 11)	
4.1.8) iati-activities→iati-activity→transaction→value	
4.1.9) iati-activities→iati-activity→document-link	
4.1.10) iati-activities→iati-activity→related-activity	
Result	28

4.1.11) iati-activities→iati-activity→result	28
4.1.11) iati-activities→iati-activity→result->indicator	
4.1.11) iatiiati-activity→result->indicator->baseline	
4.1.11) iatiiati-activity→result→indicator→period (target)	
4.1.11) iatiiati-activity→result→indicator→period (actual)	
4.1.11) iati→result→indicator→period (yearly result)	
4.1.11) iati→result→indicator→period (target) (yearly result)	
4.1.11) iati→result→indicator→period (actual) (yearly result)	
IATI Organisation file	
Organisation	
0.9a5ao	

## Introduction

This document describes how Hivos plans to implement the Publication Guidelines for partners, contractors and suppliers as released by The Netherlands Ministry of Foreign Affairs on December 1st 2015.

The guidelines are available online via:

https://www.government.nl/binaries/government/documents/publications/2015/12/01/open-data-and-development-cooperation/how-to-use-the-iati-standard-1.pdf

Hivos already publishes an IATI activity file for the entire organisation, but for the Dutch government data must be represented in a different form and also different performance indicators must be added.

The head of the current IATI activity file implemented in PL/SQL looks like this

```
<iati-activities version="1.01" generated-datetime="2016-03-14T06:50:39">
-<iati-activity xml:lang="en" hierarchy="1" default-currency="EUR" last-updated-datetime="2016-03-08T08:35:33">
   <reporting-org type="22" ref="NL-KVK-41198677">HIVOS</reporting-org>
   <iati-identifier>NL-2-1012899</iati-identifier>
  -<title>
     Consultancy on development of small breeders for the project of Introducing improved breed of pigs and promotion of
   <activity-status code="2">Implementation</activity-status>
   <activity-date type="start-actual" iso-date="2016-03-01"/>
   <activity-date type="end-actual" iso-date="2016-05-31"/>
  -<contact-info>
     <organisation>Alexander Kamil Kasim/organisation>
     <website>n/a</website>
   </contact-info>
   <participating-org xml:lang="en" role="Implementing">Alexander Kamil Kasim</participating-org>
<recipient-country code="ID">Indonesia</recipient-country>
   <policy-marker/>
  -<budget>
     <value value-date="2016-02-27" currency="EUR">8739</value>
   </budget>
  -<transaction>
     <transaction-type code="D">Disbursement</transaction-type>
     org>GRM International
     <receiver-org>Alexander Kamil Kasim/receiver-org>
     <value value-date="2016-03-11" currency="EUR">2622</value>
<transaction-date iso-date="2016-03-11"/>
   </transaction>
```

Figure 1: Hivos IATI 1.01 XML

## Scope

Hivos will provide one activity file that is limited to the following Osiris **project clusters** also known as strategic partnerships:

- Green and inclusive energy (id: 1006710)
- Sustainable diets 4 all (id: 1006709)
- Open contracting (id: 1006708)
- Women at work (id: 1006707)

#### And the following project clusters:

- Flow Women Empowered (id: 1006719)
- Lead Mideast Creatives Youth Entrepreneurship (id: 1006701)
- RHRN Right here Right now (id: 1007200)
- Women on the Frontline, extension Phase I (id:1006717)
- Central American Human Rights Program (CAHRP) (id:1008706)
- Syrian Women Peace and Security (id:1008718)
- Sumba Iconic Island Solar Services (1009105)
- Getting down to Business (id:1009701)

#### And the following funds:

- Strategic Partnerships fund (documentno: 1000517, id: 1010612)
- Flow fund (documentno: 1000518, id: 1010613)
- Lead fund (documentno: 1000519, id: 1010614)
- RHRN fund (documentno: 1000543, id: 1011100)
- WoF fund (documentno 1000575 id:1011900 )
- CAHRP fund (documentno 1000588 id:1012303)
- NAP fund (documentno 1000598 id:1012313)
- Sumba Iconic Island Solar Services fund (documentno 1000629 id:1012801)
- Stop Child Labour fund (documentno 1000641 id:1013200)

## Requirements

- 1. IATI standard version 2.03 or higher.
- 2. Valid XML http://validator.iatistandard.org/
- 3. Frequency uploaded on a quarterly basis
- 4. Preferably English

Organisations with more than one agreement with the ministry may choose to publish all activities in one comprehensive IATI publication

Your IATI activity file should at least contain all the activities which are funded by the Ministry of Foreign Affairs. If the support to these activities is used to implement (underlying) activities, you should also publish these in your data.

## **Program Funding Use Case**

The following 2 paragraphs are taken from the Guidelines directly:

In order to achieve meaningful IATI publications, that provide understandable insights for all your partners and meet the requirements to serve as an official progress report about your activities, the ministry has developed a model to set up an IATI publication based on use cases.

#### **Program Funding**

Definition: an organisation is funded to carry out a specific program or series of activities. As a result of this funding, a series of activities are planned. Those activities lead to outflows from the organisation.

We conclude that Hivos falls in the program funding category. The following figure illustrates the situation:

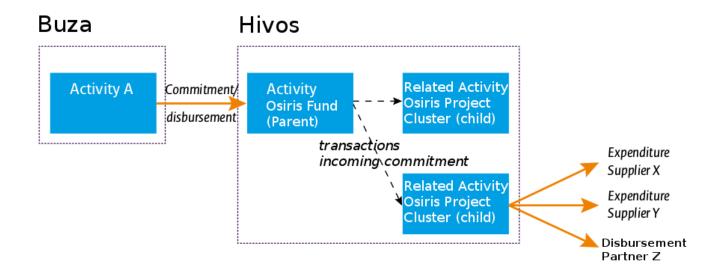


Figure 2: Program Funding Use case for Hivos and Osiris

As a result of this use case, published IATI activities will be based on both funding and project clusters in Osiris.

#### **Osiris contracts**

We create a view for the contracts table in Osiris that filters out data that we do not want to have in the IATI publication. Where in the remainder of this document is referred to afgo commitment, contract or commitment the following view is intended:

CREATE OR REPLACE VIEW JASPER.HV\_AFGO\_COMMITMENT AS SELECT \* FROM AFGO COMMITMENT

WHERE CONFIDENTIALITYSTATUS = 'P' -- filter confidential records
AND AFGO\_COMMITMENT.MASTERCOMMITMENT\_ID IS NULL -- filter extension contracts
AND AFGO\_COMMITMENT.DOCSTATUS IN ('CO','CL'); -- filter draft, invalid, void etc.

#### **Osiris Business Partners**

We create a view for the Business Partners table in Osiris that filters out data that we do not want to have in the IATI publication. Where in the remainder of this document is referred to C\_BPARTNER or Business Partner the following view is intended:

CREATE OR REPLACE VIEW JASPER.HV\_C\_BPARTNER AS
SELECT \* FROM C\_BPARTNER
WHERE CONFIDENTIALITYSTATUS = 'P'; -- filter confidential records

#### **IATI** Identifier

It is important that IATI identifiers are used consistently between publications. This means that we must use the same IATI identifiers as used in previous publications and if applicable choose new identifiers that allow for future publications. To do this we choose new identifiers following the structure in the table below.

Priority	ref attribute
0	NL-KVK-41198677-TABLENAME-REFERENCENO (special field for IATI) example: NL-KVK-41198677-AFGO_FUND-1234567
1	NL-KVK-41198677-TABLENAME-DOCUMENTNO example: NL-KVK-41198677-AFGO_COMMITMENT-1234567
2	NL-KVK-41198677-TABLENAME-TABLE_ID example: NL-KVK-41198677-AFGO_PROJECTCLUSTER-1234567

For activities based on contract, commitment IATI element *other-identifier* must be added with the *ref attribute* NL-2-documentno (example: NL-2-1012759) <a href="http://reference.iatistandard.org/203/activity-standard/iati-activities/iati-activity/other-identifier/">http://reference.iatistandard.org/203/activity-standard/iati-activities/iati-activity/other-identifier/</a>

## IATI Activity file

The technical IATI *standard* can be accessed via the following URL, its contents are invaluable for implementing IATI publications:

http://reference.iatistandard.org/203/activity-standard/summary-table/

#### **Activities**

The parent and child activities are described in this document as being the same. If/when information applies to only the parent or child, (P) or (C) is added for making the destinction.

#### (4.1.1) iati-activities

XML attribute	value
version	2.03
generated-datetime	SYSDATE

#### (4.1.2) iati-activities→iati-activity

XML attribute	value
last-updated-datetime	SYSDATE
xml:lang	en

Updated-datetime reflects generated datetime to force 3<sup>rd</sup> parties to update underlying data.

#### (4.1.3) iati-activities→iati-activity→reporting-org

XML attribute	value
type	21
ref	NL-KVK-41198677
->narrative	HIVOS

type: Hardcoded to 21 International NGO.

Argumentation (type): <a href="http://reference.iatistandard.org/203/codelists/OrganisationType/">http://reference.iatistandard.org/203/codelists/OrganisationType/</a>

## (4.1.3) iati-activities→iati-activity→iati-identifier

XML attribute	value
	NL-KVK-41198677-AFGO_FUND-AFGO_FUND_DOCUMENTNO (p)
	NL-KVK-41198677-AFGO_PROJECTCLUSTER-AFGO_PROJECTCLUSTER_ID (c)

## (4.1.4) iati-activities→iati-activity→title

XML attribute	value
	AFGO_FUND.DESCRIPTION (p) AFGO_PROJECTCLUSTER.NAME (c)
	(1)

## (4.1.4) iati-activities→iati-activity→description->narrative

XML attribute	value
	AFGO_FUND.DESCRIPTION (p)
	AFGO_ASSESSMENT (c)
	AFGO_CRITERIUM_ID = '1002300'
	AFGO_ASSESMENTLINE.TEXTSCORE <sup>1</sup>

textscore is a CLOB field, the output is currently limited to 32000 characters.

## (4.1.4) iati-activities→iati-activity→activity-status

XML attribute	value
code	2
	implementation

#### (4.1.4) iati-activities→iati-activity→activity-date

XML attribute	value
type	
iso-date	AFGO_FUND.STARTDATE (p) AFGO_PROJECTCLUSTER.STARTDATE (c)

XML attribute	value
type	3
iso-date	AFGO_FUND.ENDDATE (p) AFGO_PROJECTCLUSTER.ENDDATE (c)

type: 1 => Planned start, 3 => Planned end.

Argumentation (type): <a href="http://reference.iatistandard.org/203/codelists/ActivityDateType/">http://reference.iatistandard.org/203/codelists/ActivityDateType/</a>

#### (4.1.4) iati-activities→iati-activity→contact-info

XML attribute	value
type	

type: 1 => General Enquiries

Argumentation (type): <a href="http://reference.iatistandard.org/203/codelists/ContactType/">http://reference.iatistandard.org/203/codelists/ContactType/</a>

#### (4.1.4) iati-activities→iati-activity→contact-info->telephone

XML attribute	value
	0031703765500

## (4.1.4) iati-activities→iati-activity→contact-info->email

XML attribute	value
	info@hivos.org

Documentation: <a href="http://reference.iatistandard.org/203/activity-standard/iati-activities/iati-activity/contact-info/">http://reference.iatistandard.org/203/activity-standard/iati-activities/iati-activity/contact-info/</a>

#### **Assessment (webform)**

Some information needed for the IATI publication is registered via Assessments on the Project Cluster in Osiris. Assessments can be seen as webforms.

#### IATI all baseline data

This assessment is the same for all projectclusters and can be obtained with the following SQL query:

# SELECT \* FROM AFGO\_SCHEDULEITEM LEFT OUTER JOIN AFGO\_ASSESSMENT ON AFGO\_SCHEDULEITEM.AFGO\_SCHEDULEITEM\_ID = AFGO\_ASSESSMENT.AFGO\_SCHEDULEITEM\_ID

LEFT OUTER JOIN AFGO\_ASSESSMENTLINE ON

AFGO\_ASSESSMENTLINE.AFGO\_ASSESSMENT\_ID =

AFGO ASSESSMENT.AFGO ASSESSMENT ID

LEFT OUTER JOIN AFGO CRITERIUM ON

AFGO\_ASSESSMENTLINE.AFGO\_CRITERIUM\_ID = AFGO CRITERIUM.AFGO CRITERIUM ID

LEFT OUTER JOIN AD\_REF\_LIST ON

AFGO\_ASSESSMENTLINE.LISTSCORE\_ID = AD\_REF\_LIST.AD\_REF\_LIST\_ID

#### WHERE

--AFGO\_ASSESSMENT.AFGO\_ASSESSMENT\_ID = 1043850 AFGO\_SCHEDULEITEM.AFGO\_SCHEDULEITEM\_ID = '1088162'

Of course the relation with project cluster needs to be added to implement the IATI publication.

#### IATI result data

tbd assessment for QR indicators every quarter/year? tdb assessment for attaching documents (like annual narrative) yearly?

#### Report for staff overview

Osiris will not show results publised in the past when completing new assessments, therefore an overview QR report most be implemented in Jasperserver. ETA: Q3 2016.

#### (4.1.5) iati-activities→iati-activity→participating-org

Following the guidelines there should always be 2 participating organisations for parent activities. One being The Netherlands Ministry of Foreign Affairs and one being Hivos.

The Netherlands Ministry of Foreign Affairs aka Buza

XML attribute	value
ref	XM-DAC-7
role	1
type	10

#### Documentation:

- <a href="http://reference.iatistandard.org/203/codelists/OrganisationRole/">http://reference.iatistandard.org/203/codelists/OrganisationRole/</a>
- http://reference.iatistandard.org/203/codelists/OrganisationType/
- <a href="http://www.iatiregistry.org/publisher/about/minbuza">http://www.iatiregistry.org/publisher/about/minbuza</a> nl

#### Hivos

XML attribute	value
ref	NL-KVK-41198677
role	2
type	21

#### Hivos

XML attribute	value
ref	NL-KVK-41198677
role	4
type	21

#### Documentation:

• <a href="http://www.iatiregistry.org/publisher/about/stichting-hivos">http://www.iatiregistry.org/publisher/about/stichting-hivos</a>

#### C\_BPARTNER 1...\*

For child activities Hivos is a participating organisation and one or more participating organisations are added for all Hivos Business Partners that are linked under all contracts in the project cluster.

• Participating organisations will be omitted from IATI when contract/commitment OR Business Partner have been marked as Confidential.

XML attribute	value
role	4
->narrative	C_BPARTNER.NAME

#### Additional considerations:

- AFGO\_PROJECTCLUSTER\_ID is now a field on AFGO\_COMMITMENT
- C\_BPARTNER\_ID is a field on AFGO COMMITMENT
- Check for unique records (SELECT DISTINCT)

#### (4.1.6) iati-activities→iati-activity→recipient-country

Only for child activities.

XML attribute	value
code	ASSESSMENT (c)  AFGO_CRITERIUM.DESCRIPTION = 'IATI Country'  AFGO_CRITERIUM.NAME
percentage	ASSESSMENT (c)  AFGO_CRITERIUM.DESCRIPTION = 'IATI Country'  AFGO_ASSESSMENTLINE.INTEGERSCORE  INTEGERSCORE <> 0

#### Documentation:

http://reference.iatistandard.org/203/activity-standard/iati-activities/iati-activity/recipient-country/

## (4.1.6) iati-activities→iati-activity→recipient-region

XML attribute	value
code	998 (p) ASSESSMENT (c) AFGO_CRITERIUM.DESCRIPTION = 'IATI Region' AFGO_CRITERIUM.NAME
percentage	100 (p) ASSESSMENT (c) AFGO_CRITERIUM.DESCRIPTION = 'IATI Region' AFGO_ASSESSMENTLINE.INTEGERSCORE INTEGERSCORE <> 0

Parent hardcoded to 998 - Developing countries, unspecified for 100%.

#### Documentation:

http://reference.iatistandard.org/203/codelists/Region/

http://reference.iatistandard.org/203/activity-standard/iati-activities/iati-activity/recipient-region/

## (4.1.7) iati-activities→iati-activity→sector

Only for child activities.

XML attribute	value
vocabulary	1
code	ASSESSMENT (c)  AFGO_CRITERIUM.DESCRIPTION = 'IATI DAC'  AFGO_CRITERIUM.NAME
percentage	xsd:decimal
	AFGO_SCHEDULEITEM ASSESSMENT (c) AFGO_CRITERIUM.DESCRIPTION = 'IATI DAC' AFGO_ASSESSMENTLINE.INTEGERSCORE INTEGERSCORE <> 0

vocabulary: 1 => OECD DAC CRS Purpose Codes (5 digit) Documentation (vocabulary): required by Guidelines <a href="http://www.oecd.org/dac/stats/dacandcrscodelists.htm">http://www.oecd.org/dac/stats/dacandcrscodelists.htm</a>

code: CRS CODE on tab Purpose code Documentation (code):

http://www.oecd.org/dac/stats/documentupload/Codelist\_Dec\_2015.xls

## (4.1.7) iati-activities→iati-activity→policy-marker

Only for child activities.

XML attribute	value
vocabulary	1
code	AFGO_SCHEDULEITEM ASSESSMENT AFGO_CRITERIUM.DESCRIPTION = 'IATI policymarker' AFGO_CRITERIUM.NAME
percentage	xsd:decimal
significance	AFGO_SCHEDULEITEM ASSESSMENT AFGO_CRITERIUM.DESCRIPTION = 'IATI policymarker' AD_REF_LIST.VALUE AND VALUE <> 0

vocabulary: 1 => OECD DAC vocabulary required by Guidelines Documentation:

http://reference.iatistandard.org/203/codelists/PolicyMarkerVocabulary/

http://reference.iatistandard.org/203/codelists/PolicyMarker/

http://reference.iatistandard.org/203/codelists/PolicySignificance/

#### (4.1.7) iati-activities→iati-activity→default-flow-type

Only for child activities.

XML attribute	value
code	30

code: 30 => From the guidelines:

The classification of the resource flow – ODA/OOF/other The funding the ministry provides is classified as ODA, but as soon as partners use these funds, they become a private flow. Options are:

30 - Private NGO and other private sources, as a rule concessional in the form of a grant

35 - Private Market

For traditional development projects this is typically code 30 – Private NGO and other private sources. In cases where funds are provided as loans against commercial rates, or capital is provided code 35 – Private Market can be applied.

Documentation: <a href="http://reference.iatistandard.org/203/codelists/FlowType/">http://reference.iatistandard.org/203/codelists/FlowType/</a>

#### (4.1.7) iati-activities→iati-activity→default-finance-type

Only for child activities.

XML attribute	value
code	110

code: 110 => From the guidelines: Financing mechanism – grant/loan/capital/export credit etc. For traditional grant-based development activities this is: Code 110 – Aid grant excluding debt reorganisation.

Hardcoded now because at the level of activity, there might be at transactionlevel some other codes applicable but Ministry takes info from activity level.

Documentation: <a href="http://reference.iatistandard.org/203/codelists/FinanceType/">http://reference.iatistandard.org/203/codelists/FinanceType/</a>

#### (4.1.7) iati-activities→iati-activity→default-aid-type

Only for child activities.

XML attribute	value
code	C01

code: C01 => From the guidelines: Type of assistance provided.

For NGOs this is typically:

C01 - Project-type interventions

Hardcoded now because at the level of activity, there might be at transactionlevel some other codes applicable but Ministry takes info from activity level.

Documentation: <a href="http://reference.iatistandard.org/203/codelists/AidType/">http://reference.iatistandard.org/203/codelists/AidType/</a>

#### (4.1.7) iati-activities→iati-activity→default-tied-status

Only for child activities.

XML attribute	value
code	5

code: 5 => Untied, hardcoded for now as Hivos does not use the other types. Documentation (code): http://reference.iatistandard.org/203/codelists/AidType/


## **Budget**

Only for parent activities.

The budget reported to IATI is registered in Osiris in the Fund Schedule screen and corresponding AFGO\_FUNDSCHEDULE, AFGO\_FUNDSCHEDULE\_LINE tables.

#### Requirements:

- Budgets must be entered by year for each year for the duration of the project. A
  quarter set to `2016 Standard` equals the year 2016 in Osiris. Registration by year
  or month is allowed by the guidelines, considering implementation, using budget
  years is the best option
- 2. Views are created to filter out invalid AFGO\_FUNDSCHEDULE\_ID's (1011123, 24, 26, 27, 28, 29,30, 31,38, 39, 40, 41, 42, 43, 45, 46)

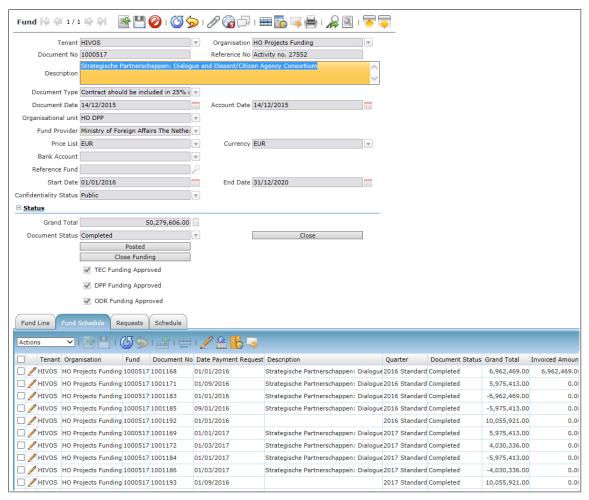

Fund budget window in Osiris

## (4.1.8) iati-activities→iati-activity→budget

Only for parent activities.

XML attribute	value
type	1
→period-start iso-date	AFGO_FUNDSCHEDULE.AFGO_QUARTER_ID round to 1st of January
→period-end iso-date	AFGO_FUNDSCHEDULE.AFGO_QUARTER_ID round to 31st of December

type: 1 => Orignal.

Documentation (type): <a href="http://reference.iatistandard.org/203/codelists/BudgetType/">http://reference.iatistandard.org/203/codelists/BudgetType/</a>

## (4.1.8) iati-activities→iati-activity→budget→value

Only for parent activities.

XML attribute	value
currency	AFGO_FUNDSCHEDULE.C_CURRENCY_ID
value-date	= period-start iso-date
	SUM (AFGO_FUNDSCHEDULE.GRANDTOTAL) GROUP BY AFGO_QUARTER_ID WHERE AFGO_FUND_ID_ID


#### **Transactions**

The Guidelines emphasis lays on transactions of the following types:

- 1. Incoming Funds
- 2. Commitment
- 3. Disbursement
- 4. Expenditure
- 11. Incoming Commitment

The numbered list corresponds with <a href="http://reference.iatistandard.org/203/codelists/TransactionType/">http://reference.iatistandard.org/203/codelists/TransactionType/</a>

Contractline / AFGO\_COMMITMENTLINE can be seen as transactions of *type 11 (Incoming Commitment)* in IATI.

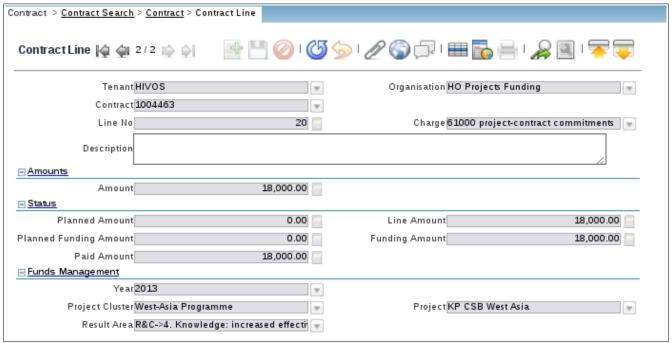

Contractline tab in Osiris

#### 4.1.8) iati-activities→iati-activity→transaction (type 1)

Only for parent activities. For each fundschedule:

XML attribute	value
→transaction-type code	1
→transaction-date iso- date	C_INVOICE.DATEINVOICED
→provider-org→ref	XM-DAC-7
→provider- org→provider-activity-id	AFGO_FUND.REFERENCENO

## 4.1.8) iati-activities→iati-activity→transaction→value

Only for parent activities.

XML attribute	value
currency	AFGO_FUNDSCHEDULE.C_CURRENCY_ID
	C_INVOICE.GRANDTOTAL WHERE AFGO_FUND_ID_ID AND AFGO_FUNDSCHEDULE.DATEINVOICED <= sysdate

type 1 Incoming Funds	Funds recieved for use on the activity, which can be from an
	external or internal source.

Only actually received and registered funds are published, this is done via an inner join with c\_invoice.

Documentation (type): <a href="http://reference.iatistandard.org/203/codelists/TransactionType/">http://reference.iatistandard.org/203/codelists/TransactionType/</a>

## 4.1.8) iati-activities→iati-activity→transaction (type 11)

Only for parent activities. For each fundschedule:

XML attribute	value
→transaction-type code	11
→transaction-date iso- date	AFGO_FUNDSCHEDULE.DATEINVOICED
→provider-org→ref	XM-DAC-7
→provider- org→provider-activity-id	AFGO_FUND.REFERENCENO

## 4.1.8) iati-activities→iati-activity→transaction→value

Only for parent activities.

XML attribute	value
currency	AFGO_FUNDSCHEDULE.C_CURRENCY_ID
	SUM (AFGO_FUNDSCHEDULE. <b>GRANDTOTAL</b> ) GROUP BY AFGO_QUARTER_ID WHERE AFGO_FUND_ID_ID

type 11	Incoming Commitment	A firm, written obligation from a donor or provider to provide a specified amount of funds, under particular terms and
	Committee	conditions, reported by a recipient for this activity.

Documentation (type): <a href="http://reference.iatistandard.org/203/codelists/TransactionType/">http://reference.iatistandard.org/203/codelists/TransactionType/</a>

Version 2.2 - July 20, 2018

#### 4.1.8) iati-activities→iati-activity→transaction (type 3 or 4)

Only for child activities. For each payment request (C\_INVOICE):

XML attribute	value
→transaction-type code	3 default 4 In case business partner name is Hivos
→transaction-date iso- date	C_INVOICE.DATEACCT
<i>→receiver- org →</i> narrative	C_BPARTNER.NAME

## 4.1.8) iati-activities→iati-activity→transaction→value

Only for child activities.

XML attribute	value
currency	C_INVOICE.C_CURRENCY_ID
	C_INVOICELINE.LINENETAMT
	WHERE C_INVOICE.DATEACCT <= sysdate
	AND C_INVOICE.DOCSTATUS = 'CO'
type 3 Disbursement	Outgoing funds that are placed at the disposal of a recipient government or organisation, or funds transferred between two separately reported activities. Under IATI traceability standards the recipient of a disbursement should also be required to report their activities to IATI.
type 4 Expenditure	Outgoing funds that are spent on goods and services for the activity. The recipients of expenditures fall outside of IATI traceability standards.

Documentation (type): <a href="http://reference.iatistandard.org/203/codelists/TransactionType/">http://reference.iatistandard.org/203/codelists/TransactionType/</a>

#### 4.1.8) iati-activities→iati-activity→transaction (type 11)

Only for child activities. For each contractline:

XML attribute	value
→transaction-type code	11
→transaction-date iso- date	AFGO_COMMITMENTLINE.UPDATED
→provider-org→ref	NL-KVK-41198677
→provider- org→provider-activity-id	NL-KVK-41198677-AFGO_FUND-AFGO_FUND.REFERENCENO

#### 4.1.8) iati-activities→iati-activity→transaction→value

Only for child activities.

XML attribute	value
currency	AFGO_COMMITMENT.C_CURRENCY_ID
	AFGO_COMMITMENTLINE.LINENETAMT WHERE AFGO_FUND_ID = 1

type 11 Incoming	A firm, written obligation from a donor or provider to provide a
Commitment	specified amount of funds, under particular terms and
	conditions, reported by a recipient for this activity.

In case a contract has multiple donors, it is not possible to use grandtotal from the contract in the activity as this would sum the donated amounts of various donors. To avoid this we are using contractlines instead.

Argumentation (type): from the Guidelines:

Furthermore, the financial relation between parent Activity and child Activities, is represented through an **Incoming Commitment** transaction, with provider organisation Hivos and parent Activity's iati-identifier.

http://reference.iatistandard.org/203/codelists/TransactionType/

<sup>&</sup>lt;sup>1</sup> afgo\_fund can be obtained by joining child table afgo\_fundallocation with afgo\_commitmentline.

#### 4.1.9) iati-activities→iati-activity→document-link

A link to an online, publicly accessible web page or document. This implies some IT infrastructure should be in place. The following documents are to be published:

Annual analysis report on progress of the activity (according to contractual obligation)

XML attribute	value
url	https://iati.hivos.org/docs/ + HV_ATT_QVW.EXTA_ATTXT_URL where HV_ATT_QVW.EXTA_CATEGORY_ID='1000300'
format	application/octet-stream http://reference.iatistandard.org/203/codelists/FileFormat/
→ title narrative	HV_ATT_QVW.EXTA_ATTXT_NAME
→ category code	A07 http://reference.iatistandard.org/203/codelists/DocumentCateg ory/
→ language code	en
→ document-date	HV_ATT_QVW.EXTA_ATTXT_POSTALDATE

All documents of EXTA\_CATEGORY\_ID 1000300 'A07' are copied to a Basic Web Server that can be reached via <a href="https://iati.hivos.org/docs/">https://iati.hivos.org/docs/</a>.

#### 4.1.10) iati-activities→iati-activity→related-activity

Only for child activities.

Reference from Osiris Project Cluster to Osiris Fund as described in **figure 2** and the **Program Funding Use Case** chapter.

XML attribute	value
ref	NL-KVK-41198677-AFGO_FUND-AFGO_FUND.REFERENCENO
type	1

type: 1 => parent

Argumentation (type): from the Guidelines:

Another separately reported IATI activity that is related to this one. If you report activities at different levels (see the Use cases Program funding and Partnerships), this element MUST be used to report the relationship between the program and the project activities.


The ministry chooses to only use the 'parent' relation, pointing from the child to the parent.

Documentation (type): <a href="http://reference.iatistandard.org/203/codelists/RelatedActivityType/">http://reference.iatistandard.org/203/codelists/RelatedActivityType/</a>

#### Result

Only for child activities.

IATI results allow reporting of outputs, outcomes, impacts and other results that stem directly from the activity. Implemented via an assessment form on project cluster.

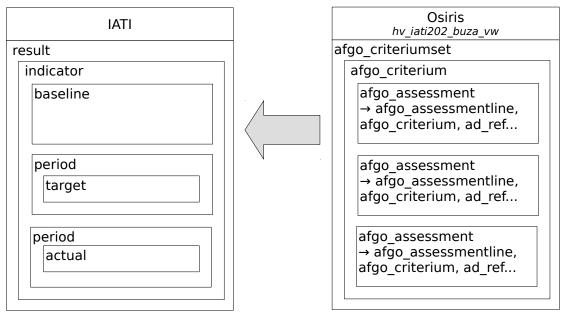

### 4.1.11) iati-activities→iati-activity→result

XML attribute	value
type	afgo_criteriumset.description
aggregation-status	0
→ title narrative	afgo_criteriumset.help
→ description narrative	afgo_criteriumset.documentnote

http://reference.iatistandard.org/203/codelists/ResultType/ http://reference.iatistandard.org/203/activity-standard/iati-activities/iati-activity/result/

#### 4.1.11) iati-activities→iati-activity→result->indicator

measure	ad_reference.description 'Float Number' then '1', '10 Digit numeric' then '2', 'AFGO_CriteriumValue' then '4', 'Text (Long) - Text > 2000 characters (CLOB)' then '5'
ascending	
→ title narrative	afgo_criterium.help
→ description narrative	afgo_criterium.documentnote
	select distinct where result.afgo_criteriumset_id = indicator.afgo_criteriumset_id  AND criterium.description = 'IATI indicator'

#### 4.1.11) iati..iati-activity→result->indicator->baseline

year	afgo_scheduleitem.datedoc
value	afgo_assessmentline.numericscore    afgo_assessmentline.integerscore    assessmentline.textscore    assessmentline.AFGO_CRITERIUMVALUE_ID
→ comment narrative	afgo_assessmentline.longdescription <sup>1</sup>
	select where result.afgo_criteriumset_id = indicator.afgo_criteriumset_id and baseline.afgo_criterium_id = indicator.afgo_criterium_id and afgo_scheduleitem_name = 'IATI all baseline data'

http://reference.iatistandard.org/203/codelists/IndicatorMeasure/ http://reference.iatistandard.org/203/activity-standard/iati-activities/iati-activity/result/

 $<sup>^{\</sup>rm 1}$  long description is a  $\,$  is a CLOB field, the output is currently limited to 32000 characters.

#### **4.1.11**) iati..iati-activity→result→indicator→period (target)

period-start iso-date	AFGO_PROJECTCLUSTER.STARTDATE (from child)
period-end iso-date	AFGO_PROJECTCLUSTER.ENDDATE (from child)
→ target value	afgo_assessmentline.numericscore    afgo_assessmentline.integerscore    assessmentline.textscore    assessmentline.AFGO_CRITERIUMVALUE_ID
→ target → comment narrative	afgo_assessmentline.longdescription <sup>1</sup>
	select where result.afgo_criteriumset_id = indicator.afgo_criteriumset_id and baseline.afgo_criterium_id = indicator.afgo_criterium_id and afgo_scheduleitem_name = 'IATI results target data'

http://reference.iatistandard.org/203/activity-standard/iati-activities/iati-activity/result/

#### 4.1.11) iati..iati-activity→result→indicator→period (actual)

period-start iso-date	AFGO_PROJECTCLUSTER.STARTDATE (from child)
period-end iso-date	sysdate
→ actual value	afgo_assessmentline.numericscore    afgo_assessmentline.integerscore    assessmentline.textscore    assessmentline.AFGO_CRITERIUMVALUE_ID
→ actual → comment narrative	afgo_assessmentline.longdescription¹
	select where result.afgo_criteriumset_id = indicator.afgo_criteriumset_id and baseline.afgo_criterium_id = indicator.afgo_criterium_id and afgo_scheduleitem_name = 'IATI results actual data'

http://reference.iatistandard.org/203/activity-standard/iati-activities/iati-activity/result/

Version 2.2 - July 20, 2018

<sup>&</sup>lt;sup>1</sup> longdescription is a is a CLOB field, the output is currently limited to 32000 characters.

#### 4.1.11) iati...→result→indicator→period (yearly result)

period-start iso-date	AFGO_SCHEDULEITEM.DATEDOC (rounded to January 1st)
period-end iso-date	AFGO_SCHEDULEITEM.DATEDOC

## 4.1.11) iati...→result→indicator→period (target) (yearly result)

→ target value	afgo_assessmentline.numericscore    afgo_assessmentline.integerscore    assessmentline.textscore    assessmentline.AFGO_CRITERIUMVALUE_ID
→ target → comment narrative	afgo_assessmentline.longdescription <sup>1</sup>
	select where result.afgo_criteriumset_id = indicator.afgo_criteriumset_id and baseline.afgo_criterium_id = indicator.afgo_criterium_id and afgo_scheduleitem_name = 'IATI results yearly targets'

http://reference.iatistandard.org/203/activity-standard/iati-activities/iati-activity/result/

## 4.1.11) iati...→result→indicator→period (actual) (yearly result)

→ actual value	afgo_assessmentline.numericscore    afgo_assessmentline.integerscore    assessmentline.textscore    assessmentline.AFGO_CRITERIUMVALUE_ID
→ actual → comment narrative	afgo_assessmentline.longdescription <sup>1</sup>
	select where result.afgo_criteriumset_id = indicator.afgo_criteriumset_id and baseline.afgo_criterium_id = indicator.afgo_criterium_id and afgo_scheduleitem_name = 'IATI results yearly actuals'

http://reference.iatistandard.org/203/activity-standard/iati-activities/iati-activity/result/

Version 2.2 - July 20, 2018

<sup>&</sup>lt;sup>1</sup> longdescription is a is a CLOB field, the output is currently limited to 32000 characters.

## IATI Organisation file

The IATI Organisation file contains summary budget information of the reporting organisation. At this time there are not many requirements for this file in the Publication Guidelines for partners, contractors and suppliers as released by The Netherlands Ministry of Foreign Affairs.


The technical specification can be found at:

http://reference.iatistandard.org/203/organisation-standard/overview/organisation-file/

The following online tool has been used to obtain more insights in how to set up an organisation file: <a href="https://aidstream.org/">https://aidstream.org/</a>

## **Organisation**

The budgets of type `Hivos budget 2017 for IATI` are published as budget lines to IATI and the sum of these types are reported at the total-budget level. It is expected that more budget information will become available in Osiris for 2018 at that point the budgets and budgetlines from Osiris will be published 1:1 to IATI.

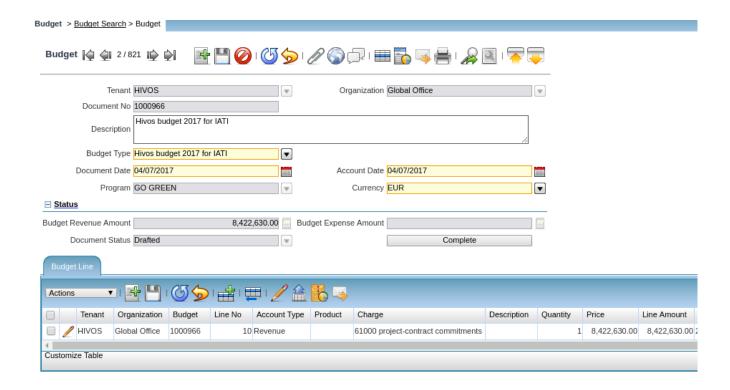

```
-<iati-organisations version="2.02" generated-datetime="2017-04-07T12:30:09Z">
    -<iati-organisation last-updated-datetime="2017-04-07T00:00:00Z">
              <organisation-identifier>NL-KVK-41198677</organisation-identifier>
         -<name>
                   <narrative>Hivos</narrative>
             </name>
         -<reporting-org ref="NL-KVK-41198677" type="21">
                   <narrative>Hivos</narrative>
             </reporting-org>
         -<total-budget>
                   <period-start iso-date="2017-01-01"/>
                   <period-end iso-date="2017-12-31"/>
                   <value currency="EUR" value-date="2017-04-07">27844689</value>
              -<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<budy>-<
                       <value currency="EUR" value-date="2017-04-07">19422059</value>
                       <narrative xml:lang="en">GO OPEN</narrative>
                   </budget-line>
              -<budget-line ref="1015402">
                       <value currency="EUR" value-date="2017-04-07">8422630</value>
                       <narrative xml:lang="en">GO GREEN</narrative>
                   </budget-line>
             </total-budget>
         -<document-link format="text/html" url="http://hivosannualreport.org/">
                       <narrative xml:lang="en">Hivos Annual Report</narrative>
                   </title>
                   <category code="B01"/>
                   <larguage code="en"/>
                   <document-date iso-date="2017-04-07"/>
             </document-link>
         </iati-organisation>
   </iati-organisations>
```

Figure 2: Hivos IATI Organisation file (example)