GESTIONNAIRE AVANCÉ DE DUPLICATION



Gad — Quick Start

Get started in a few minutes

Gad, il copie. · Advanced Duplication Manager · Version 0.1.0

User Guide · Developer Guide · All languages


Start Gad

Open **Gad** from your application menu, or run:

```
gad
```

If it is not installed yet, follow the installation instructions. Closing the window normally leaves Gad in the system tray when a tray is available. Click its icon to show the window again.

Make your first copy

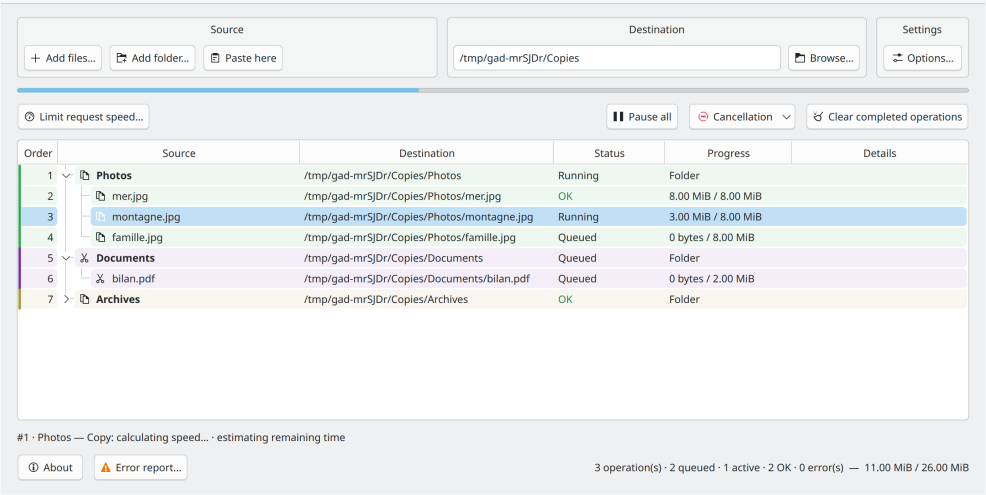

Source, Destination, and Settings are grouped above the transfer list.

1. In your file manager, select the files or folders and press **Ctrl+C**.
2. In Gad, set **Destination** to the existing folder that should receive them.
3. Click **Paste here**, or press **Ctrl+V inside Gad**.
4. Check the destination in the list. Transfer work starts automatically unless the queue is paused.

You can also use **Add files...**, **Add folder...**, or drag files into Gad after setting the destination. **Drag-and-drop always copies.** To move files, use **Ctrl+X** followed by pasting, provided the file manager publishes a recognized cut marker. Check the operation shown in the list; see the other-manager instructions if needed.


Paste again to add another request. Gad queues the work and may run two compatible transfers at once. Duplicate pending operations are ignored.

Read and control transfers

- **Queued**: waiting for its turn. **Running**: currently transferring. **OK**: finished.
- Expand a folder to see its files. Request colors help identify separate submissions; **Order** shows processing order.

- **Pause all** pauses the queue. Resume it with the same button. Right-click rows for individual pause, resume, retry, and cancellation actions.
- Select waiting rows and use **Process next**, or drag them into position while the table shows queue order.
- Canceling stops the operation; **Cancel and restore** also tries to undo completed work using retained history. Read the confirmation and detailed result before clearing history.

Set your preferences

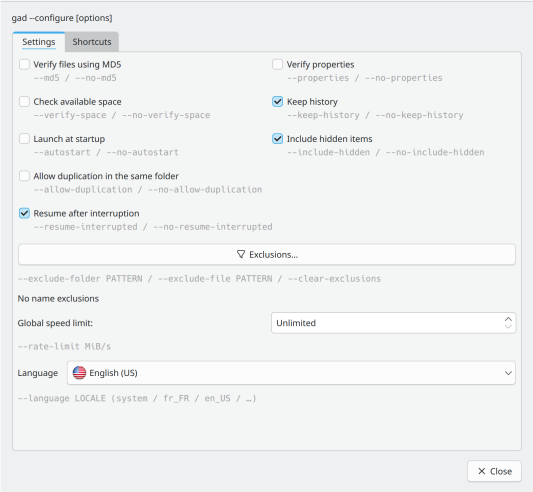

The settings dialog opens from the Settings block.

In **Settings → Options…**, the **Settings** and **Shortcuts** tabs group preferences and integrations. Changes apply immediately; **Close** or Escape closes the dialog. Command-line parameters appear in gray. **Exclusions…** accepts folder patterns such as `__*` and file patterns such as `*.tmp` or `*~`. The speed button for selected requests is on the left of the main action bar.


Allow duplication in the same folder creates names such as `photo_copied1.jpg` when copying back into the original folder. It is off by default and applies only to copies. Selection, verification, and duplication choices are captured for new requests; existing requests keep their settings. The global speed limit can change during transfers.

Paste directly from your file manager

- **Dolphin:** enable **Ctrl+V with Gad in Dolphin** in Settings and restart Dolphin. You can also use **Paste with Gad** from the context menu.
- **Konqueror:** launch **Konqueror with Gad** and enable its checkbox in Settings. File pastes go to Gad; text pastes stay native.
- **Other managers:** paste inside Gad, drag files into it, or configure a custom action using an explicit destination, for example `gad --paste "/home/demo/Documents/Copies"`. Their native Ctrl+V is not automatically intercepted.

A paste started from a file manager can run in the background without opening Gad. Plasma progress notifications provide a **Show Gad** link.

Resolve a conflict or an error

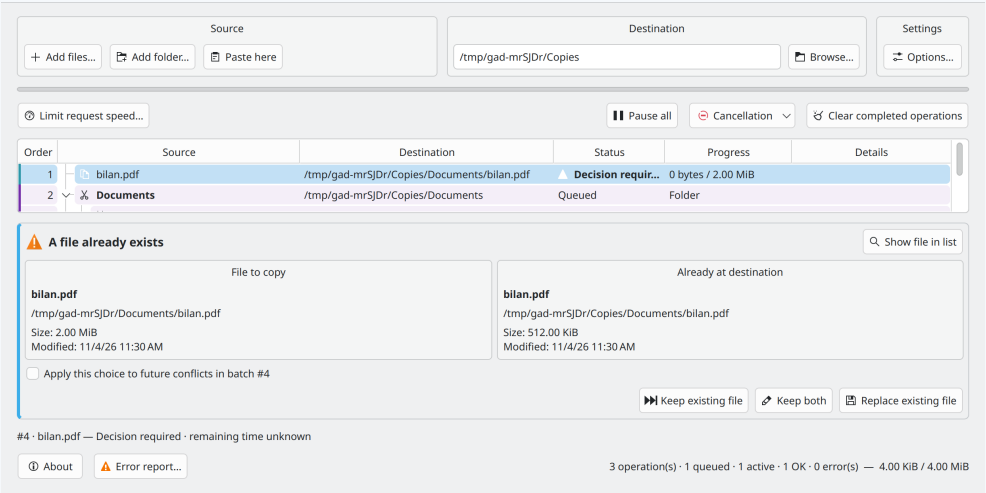

Compare the source and the existing destination before choosing an action.

For an existing file, choose **Keep existing file**, **Keep both**, or **Replace existing file**. Apply the choice to later conflicts only when that is what you intend.

Open **Error report...** for failed transfers, copy or export the details, and retry only failed files. If a device disappears, reconnect the same device at the same location and let Gad verify before resuming.

Keep history retains undo information. **Clear finished operations** removes the corresponding restoration information. For recovery, remote addresses, MD5 checks, and all cancellation choices, continue with the User Guide.

Configuration and manual pages

`gad --configure` saves preferences and updates controls in the running instance. If none is running, Gad starts in the background and the command returns. The `--no-…` forms disable checkboxes. Unspecified exclusion lists remain unchanged; repeated `--exclude-folder` or `--exclude-file` options replace the corresponding list. `--clear-exclusions` empties both lists. The global limit uses MiB/s; 0 means unlimited. `--md5` and `--properties` used with a copy or move affect only that transfer. Dolphin shortcuts use `gad --configure --dolphin-ctrl-v` or `--no-dolphin-ctrl-v`.

```
gad --configure --md5 --verify-space --no-include-hidden
gad --configure --exclude-folder "__*" --exclude-file "*.tmp" --language fr_FR --rate-limit 25
```

`man gad` · `make manpages`