

(a) What the image network sees (axial section, to scale)

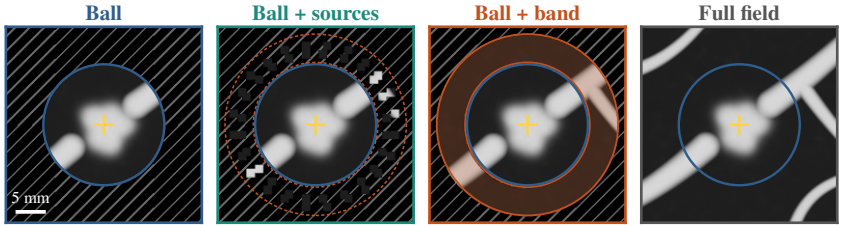

hidden voxels (set to air)


dashed orange: band outline, for reference

(b) Sparse samples (schematic)

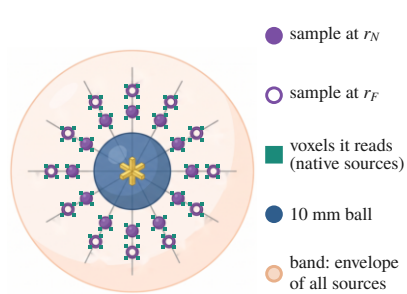

12 of 96 axes shown. The 384 sample values go to separate heads, not to the image network.

(c) Why we mask before resampling (1D example)



Resample, then mask: the hidden value leaks into the sample

Mask, then resample (ours): the same for any hidden value