


The explanation fingerprint of every model

12 retained models | 3 model classes | 30 permutations per feature

Simulated data | PFI computed directly in R (fallback backend)

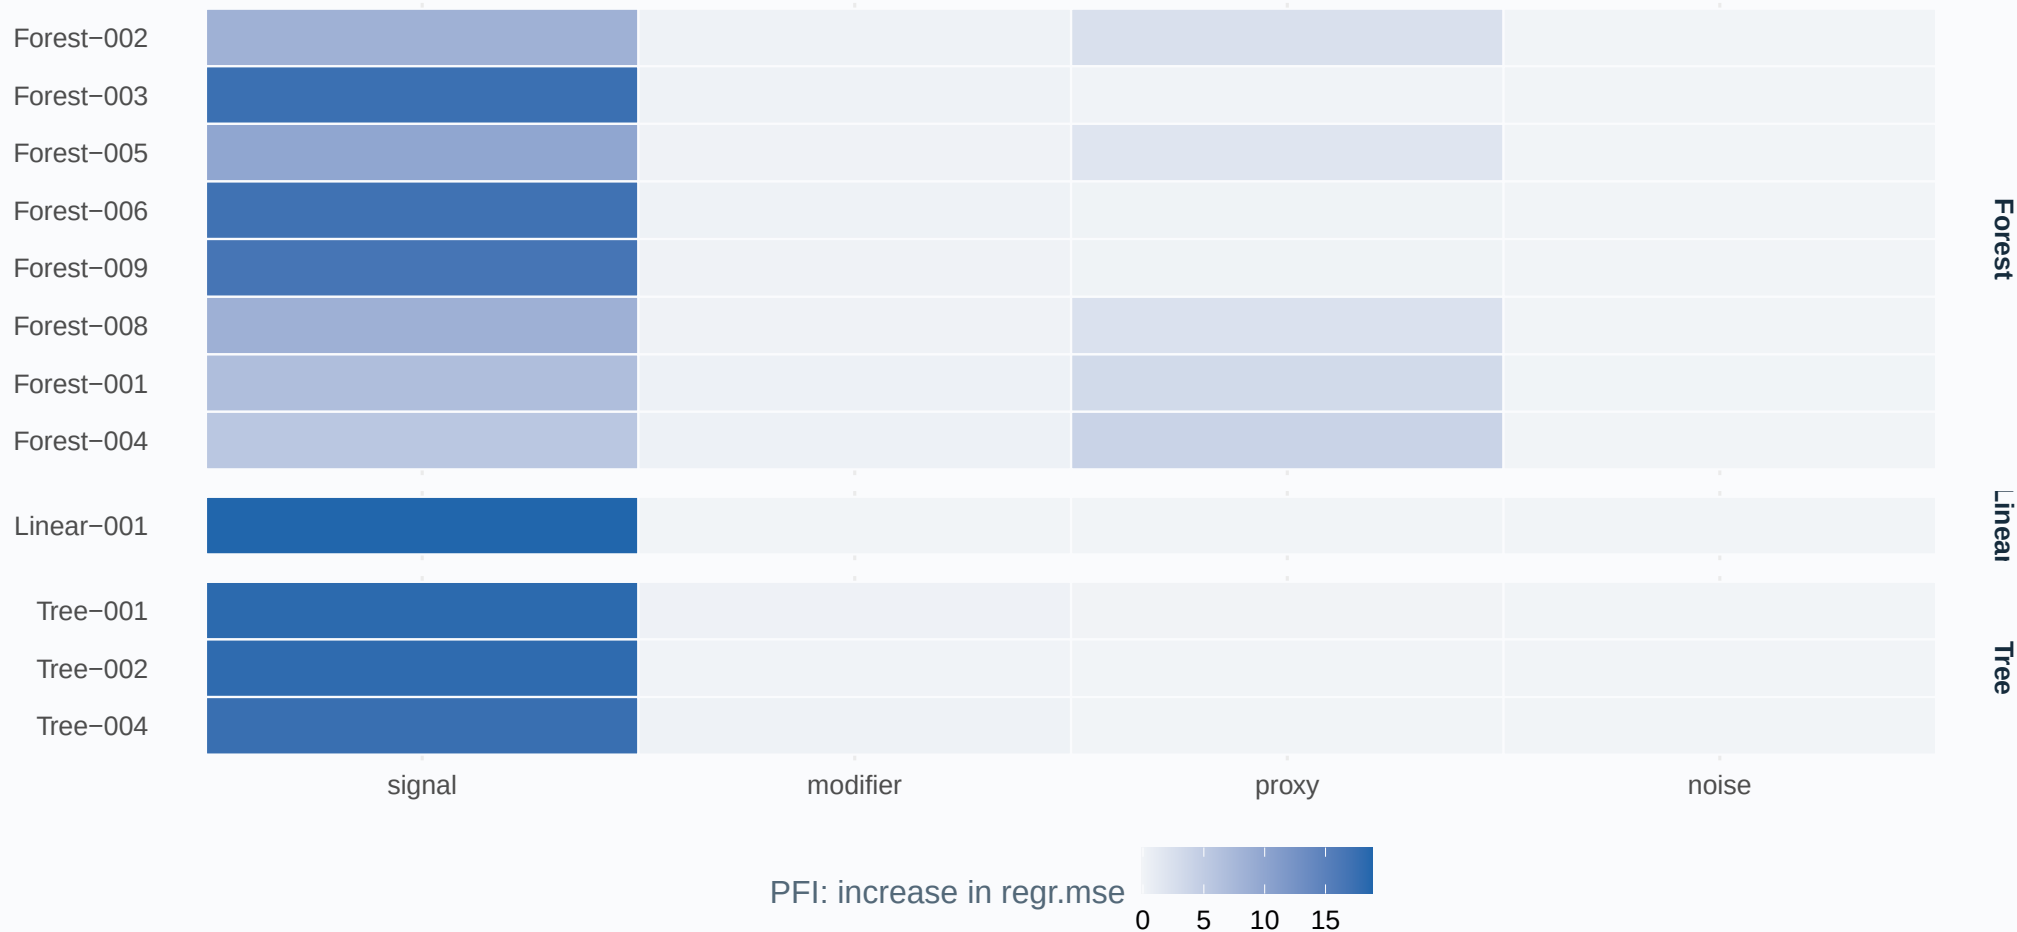

Within each class, models are ordered by validation loss. Each point or cell represents a fitted model.
Model spread describes this finite candidate set.