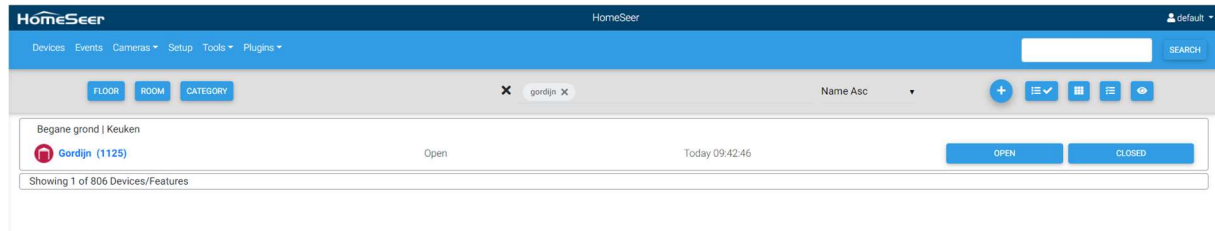
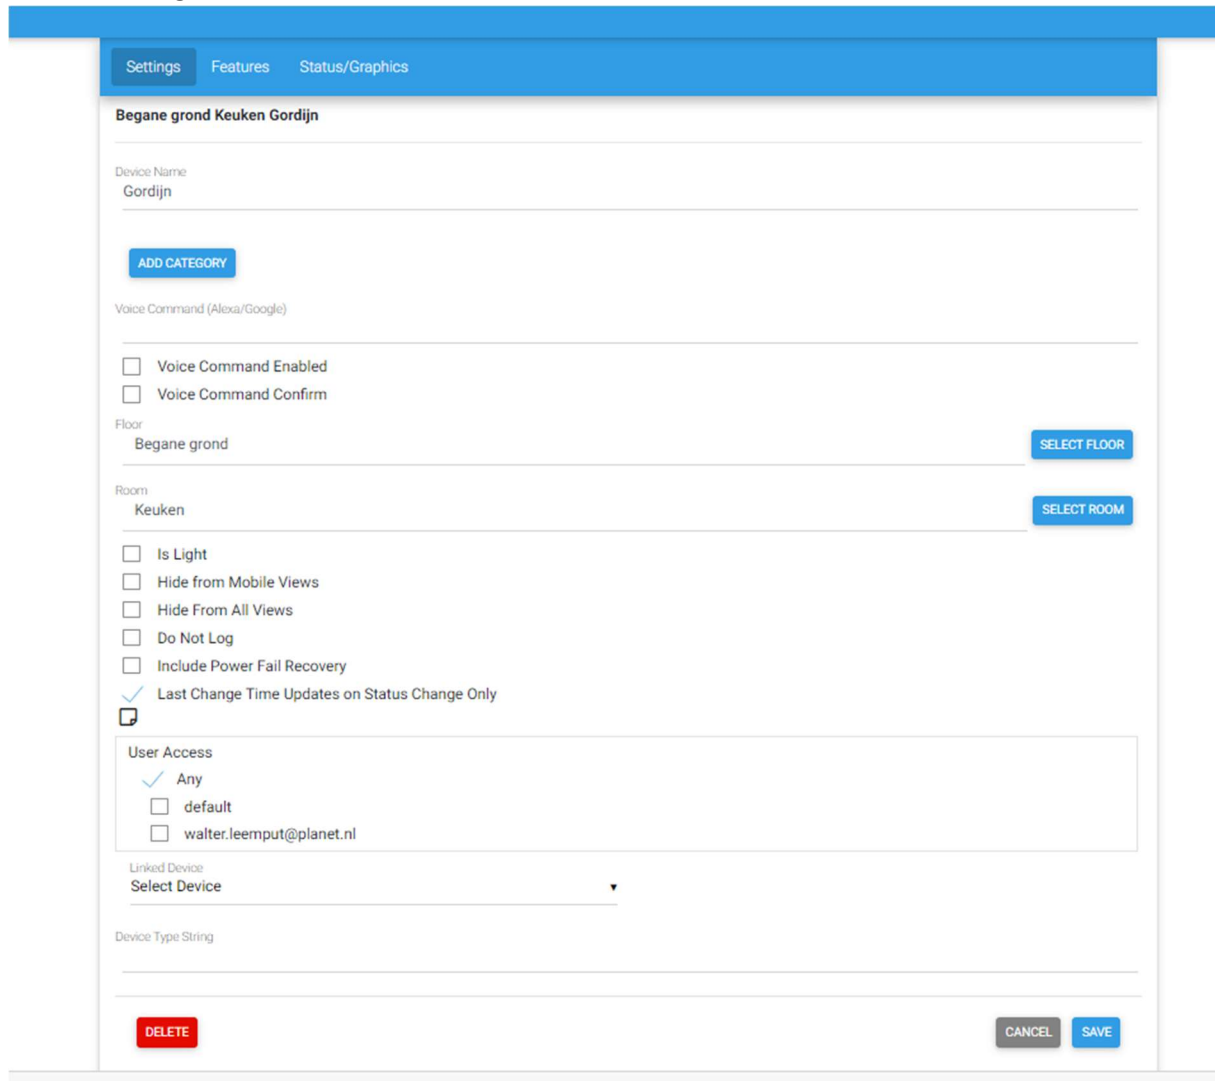


HomeSeer – Slide instructions:

Create a new virtual device 'Gordijn' (Dutch for curtain)



Default Settings:



Status/Graphics, Advanced settings: Edit Status/Controls and Graphics.





SettingsFeaturesStatus/Graphics

Begane grond Keuken Gordijn

Advanced settings, changes could cause devices to not work as expected

Gordijn







Edit Status/Controls

Start	End	Status	Control Use	Row	Column	Col Span	Control/Status	
0		Open	Off	0	0	0	Both	 
1		Closed	On	0	0	0	Both	 

NEW SINGLE VALUE

NEW RANGE VALUE

Edit Status/Graphics

Start	End	Label	Graphic	
0				 
1				 

NEW SINGLE GRAPHIC

NEW RANGE GRAPHIC






Advanced Information

ID	1125
Device Version	3.2
Value	0
Status	Open
Interface	
Device Type	Api: NotSpecified
Relationship	Standalone
Associated Devices	

Create 2 Events, 'Slide CLOSE' and 'Slide OPEN'. These Events will check the Virtual device state.

Fill in your own Device code by 'user'xxxxx:' Fill in your own IP adress. In this example i'm using the hostname 'slide'

Groups / Keuken / Keuken - Slide CLOSE







IF

Begane grond Keuken Gordijn had its value set to Closed






THEN

Launch /usr/bin/curl With Parameters: --location --request POST 'slide/rpc/Slide.SetPos' \ --digest --user 'user:xxxxx:' \ --header 'Content-Type: application/json' \ --header 'Content-Type: text/plain' \ --data-raw '{ "pos": 1 }'



ADVANCED OPTIONS

Groups / Keuken / Keuken - Slide OPEN







IF

Begane grond Keuken Gordijn had its value set to Open

THEN

Launch /usr/bin/curl With Parameters: --location --request POST 'slide/rpc/Slide.SetPos' \ --digest --user 'user:xxxxx:' \ --header 'Content-Type: application/json' \ --header 'Content-Type: text/plain' \ --data-raw '{ "pos": 0 }'



ADVANCED OPTIONS

Now you can test it by OPEN /CLOSE the virtual device and use it in your HomeSeer Events!

HomeSeer

HomeSeer

default







Devices Events Cameras Setup Tools Plugins

SEARCH


FLOOR ROOM CATEGORY

x gordijn x

Name Asc



Begane grond | Keuken

 Gordijn (1125)

Open

Today 09:42:46

OPEN

CLOSED

Showing 1 of 806 Devices/Features