

### **GAIA WORLD**

**EverLand** 

**SMART CONTRACT AUDIT** 

29.04.2022

Made in Germany by Chainsulting.de



# Table of contents

| 1. Disclaimer                                       | 5  |
|---|----|
| 2. About the Project and Company                    | 6  |
| 2.1 Project Overview                                | 7  |
| 3. Vulnerability & Risk Level                       |    |
| 4. Auditing Strategy and Techniques Applied         | 9  |
| 4.1 Methodology                                     | 9  |
| 5. Metrics  | 10 |
| 5.1 Tested Contract Files                           | 10 |
| 5.2 Used Code from other Frameworks/Smart Contracts | 11 |
| 5.3 CallGraph                                       |    |
| 5.4 Inheritance Graph                               |    |
| 5.5 Source Lines & Risk                             | 16 |
| 5.6 Capabilities                                    |    |
| 5.7 Source Unites in Scope                          | 18 |
| 6. Scope of Work                                    | 19 |
| 6.1 Findings Overview                               | 20 |
| 6.2 Manual and Automated Vulnerability Test         | 22 |
| CRITICAL ISSUES                                     | 22 |
| HIGH ISSUES   | 22 |
| 6.2.1 The Owner Can Increase The Fee To 1000        | 22 |
| 6.2.2 Centralization Risks                          | 23 |
| MEDIUM ISSUES                                       | 23 |



| 6.2.3 Type Conversion Can Result Fee Bypassing         | 23 |
|--|----|
| 6.2.4 Overpowered Owner Rights                         | 24 |
| 6.2.5 Missing Transfer Verification                    |    |
| 6.2.6 Ether Or Tokens Can Get Locked                   |    |
| 6.2.7 Race Condition                                   | 27 |
| LOW ISSUES   | 28 |
| 6.2.8 Missing Value Verification                       |    |
| 6.2.9 Missing Zero Address Checks                      |    |
| 6.2.10 Renounce Ownership                              | 30 |
| 6.2.11 Variable Could Be Declared Constant             | 30 |
| 6.2.12 Public Functions Should Be Declared As External | 31 |
| 6.2.13 State Visibility Is Not Set                     |    |
| 6.2.14 Redundant Code                                  |    |
| 6.2.15 Missing Zero Address Checks                     | 34 |
| 6.2.16 Missing Events                                  | 35 |
| 6.2.17 Long Number Literals                            |    |
| 6.2.18 No Return Value Checks                          | 36 |
| 6.2.19 Inefficient Use Of Structs                      | 37 |
| INFORMATIONAL ISSUES                                   |    |
| 6.2.20 Missing Natspec Documentation                   | 38 |
| 6.2.21 Floating Pragma Version Identified              | 39 |
| 6.2.22 Floating Compiler Versions                      | 40 |
| 6.2.23 Using Newest Compiler Version                   | 40 |
| 6.2.24 Unnecessary Initializations                     | 41 |



| 6.2.25 Unnecessary Argument In selectedMint() | 42 |
|---|----|
| 6.2.26 Isolate The Merkle Root Verification   | 43 |
| 6.3 SWC Attacks                               | 44 |
| 6.4 Verify Claims                             | 48 |
| . Executive Summary                           | 49 |
| B. Deployed Smart Contract                    |    |
| 9. About the Auditor                          |    |



### 1. Disclaimer

The audit makes no statements or warrantees about utility of the code, safety of the code, suitability of the business model, investment advice, endorsement of the platform or its products, regulatory regime for the business model, or any other statements about fitness of the contracts to purpose, or their bug free status. The audit documentation is for discussion purposes only.

The information presented in this report is confidential and privileged. If you are reading this report, you agree to keep it confidential, not to copy, disclose or disseminate without the agreement of Omnisoft LTD (GAIA Everworld). If you are not the intended receptor of this document, remember that any disclosure, copying or dissemination of it is forbidden.

| Major Versions / Date | Description                       |
|-----------------------|-----------------------------------|
| 0.1 (26.01.2022)      | Layout                            |
| 0.2 (27.01.2022)      | Test Deployment                   |
| 0.5 (28.01.2022)      | Automated Security Testing        |
|                       | Manual Security Testing           |
| 0.6 (30.01.2022)      | Testing SWC Checks                |
| 0.7 (31.01.2022)      | Verify Claims                     |
| 0.9 (01.02.2022)      | Summary and Recommendation        |
| 1.0 (02.02.2022)      | Final document                    |
| 1.1 (25.03.2022)      | Re-check                          |
| 1.2 (31.03.2022)      | Re-check                          |
| 1.3 (27.04.2022)      | Re-check                          |
| 1.4 (29.04.2022)      | Added deployed contract addresses |



# 2. About the Project and Company

Omnisoft LTD OMC Chambers Wickhams Cay 1 Road Town, Tortola British Virgin Islands

Website: https://gaiaworld.com

Twitter: https://twitter.com/GaiaEverWorld

Medium: https://medium.com/@gaia-world

Telegram: https://t.me/GaiaEverworld

**Discord:** <a href="https://discord.gg/EGT7c4RVfs">https://discord.gg/EGT7c4RVfs</a>

Email: contact@gaiaworld.com





### 2.1 Project Overview

Gaia Everworld blends classic fantasy narratives with state of the art blockchain and NFT technology. In the multi-realm gaming environment, players will be able to use their Gaia Legionnaires to wage campaigns, defend lands, and other immersive activities. Like many other games, like Pokemon, or Clash of Clans, Gaia Everworld allows players to own their characters, and interact in a dynamic environment with other human players all over the world.

The gaming environment allows for players to choose a homeland, which will give their NFT-based Gaia special powers, as well as weaknesses. The game uses a play-to-earn model, so that players have a financial incentive to join and play.

In Gaia Everworld, they offer players the ability to exist in a multi-realm online environment and participate in both PVP Battles and Legion Mode. The game centers on Gaia — a mythical creature that can be bred and owned in the form of an NFT.

The underlying goal of the game is to have the strongest collection of Gaia. With these NFT creatures, players can battle other players in the game, and conquer the lands of Gaia Everworld.

Of course, Gaia can be bred and added to a collection of other Gaia — or sold to other players. The two tokens that make the platform work are \$GAIA, which can be staked, and \$GGP, which is needed to breed Gaia.

- Holders of \$GAIA can stake coins to earn \$GAIA.
- Players to earn \$GAIA and \$GGP (Gaia Growth Potion) by playing the game and participating in events and adventures.
- Players to trade or sell their Gaia, Gaia eggs, land and resources in the Gaia Everworld marketplace.
- Players to loan their Gaia to other players in a peer to peer contract. The owner then earns a percentage of the \$GGP earned by the loanees game play.

With NFT based games, players are also the owners of the game, and can control the platform to a much higher level than ever before.



# 3. Vulnerability & Risk Level

Risk represents the probability that a certain source-threat will exploit vulnerability, and the impact of that event on the organization or system. Risk Level is computed based on CVSS version 3.0.

| Level         | Value   | Vulnerability   | Risk (Required Action)  |
|---------------|---------|---|---|
| Critical      | 9 – 10  | A vulnerability that can disrupt the contract functioning in a number of scenarios, or creates a risk that the contract may be broken.      | Immediate action to reduce risk level.                              |
| High          | 7 – 8.9 | A vulnerability that affects the desired outcome when using a contract, or provides the opportunity to use a contract in an unintended way. | Implementation of corrective actions as soon as possible.           |
| Medium        | 4 – 6.9 | A vulnerability that could affect the desired outcome of executing the contract in a specific scenario.                                     |   |
| Low           | 2 – 3.9 | A vulnerability that does not have a significant impact on possible scenarios for the use of the contract and is probably subjective.       | Implementation of certain corrective actions or accepting the risk. |
| Informational | 0 – 1.9 | A vulnerability that have informational character but is not effecting any of the code.   | An observation that does not determine a level of risk              |



## 4. Auditing Strategy and Techniques Applied

Throughout the review process, care was taken to evaluate the repository for security-related issues, code quality, and adherence to specification and best practices. To do so, reviewed line-by-line by our team of expert pentesters and smart contract developers, documenting any issues as there were discovered.

# 4.1 Methodology

The auditing process follows a routine series of steps:

- 1. Code review that includes the following:
  - i.Review of the specifications, sources, and instructions provided to Chainsulting to make sure we understand the size, scope, and functionality of the smart contract.
  - ii.Manual review of code, which is the process of reading source code line-by-line in an attempt to identify potential vulnerabilities.
- iii. Comparison to specification, which is the process of checking whether the code does what the specifications, sources, and instructions provided to Chainsulting describe.
- 2. Testing and automated analysis that includes the following:
  - i.Test coverage analysis, which is the process of determining whether the test cases are actually covering the code and how much code is exercised when we run those test cases.
  - ii. Symbolic execution, which is analysing a program to determine what inputs causes each part of a program to execute.
- 3. Best practices review, which is a review of the smart contracts to improve efficiency, effectiveness, clarify, maintainability, security, and control based on the established industry and academic practices, recommendations, and research.
- 4. Specific, itemized, actionable recommendations to help you take steps to secure your smart contracts.



### 5. Metrics

The metrics section should give the reader an overview on the size, quality, flows and capabilities of the codebase, without the knowledge to understand the actual code.

### 5.1 Tested Contract Files

The following are the MD5 hashes of the reviewed files. A file with a different MD5 hash has been modified, intentionally or otherwise, after the security review. You are cautioned that a different MD5 hash could be (but is not necessarily) an indication of a changed condition or potential vulnerability that was not within the scope of the review

| File                      | Fingerprint (MD5)                |
|---------------------------|----------------------------------|
| GAIALand.sol              | 2fe9985d48dcbbeca589fa668b193731 |
| GAIALand.sol (25.03.2022) | a564a05370901a3f83c1b56b0090b883 |
| GAIALand.sol (31.03.2022) | 331d2a206c1323f75135ef5b438b0022 |



# 5.2 Used Code from other Frameworks/Smart Contracts (direct imports)


| Dependency / Import Path                                 | Source  |
|--|---|
| @openzeppelin/contracts/access/Ownable.sol               | https://github.com/OpenZeppelin/openzeppelin-<br>contracts/blob/solc-0.6/contracts/access/Ownable.sol                     |
| @/openzeppelin/contracts/token/ERC20/IERC20.sol          | https://github.com/OpenZeppelin/openzeppelin-<br>contracts/blob/solc-0.6/contracts/token/ERC20/IERC20.sol                 |
| @openzeppelin/contracts/introspection/IERC165.sol        | https://github.com/OpenZeppelin/openzeppelin-<br>contracts/blob/solc-0.6/contracts/introspection/ERC165.sol               |
| @openzeppelin/contracts/token/ERC721/IERC721Metadata.sol | https://github.com/OpenZeppelin/openzeppelin-<br>contracts/blob/solc-<br>0.6/contracts/token/ERC721/IERC721Metadata.sol   |
| @openzeppelin/contracts/token/ERC721/IERC721Enumerable.  | https://github.com/OpenZeppelin/openzeppelin-<br>contracts/blob/solc-<br>0.6/contracts/token/ERC721/IERC721Enumerable.sol |
| @openzeppelin/contracts/token/ERC721/IERC721.sol         | https://github.com/OpenZeppelin/openzeppelin-<br>contracts/blob/solc-0.6/contracts/token/ERC721/IERC721.sol               |
| @openzeppelin/contracts/token/ERC721/IERC721Receiver.sol | https://github.com/OpenZeppelin/openzeppelin-<br>contracts/blob/solc-<br>0.6/contracts/token/ERC721/IERC721Receiver.sol   |
| @openzeppelin/contracts/introspection/ERC165.sol         | https://github.com/OpenZeppelin/openzeppelin-<br>contracts/blob/solc-0.6/contracts/introspection/ERC165.sol               |
| @openzeppelin/contracts/math/SafeMath.sol                | https://github.com/OpenZeppelin/openzeppelin-<br>contracts/blob/solc-0.6/contracts/math/Math.sol                          |





| Dependency / Import Path                             | Source  |
|--|---|
| @openzeppelin/contracts/utils/Address.sol            | https://github.com/OpenZeppelin/openzeppelin-contracts/blob/solc-0.6/contracts/utils/Address.sol                |
| @openzeppelin/contracts/utils/EnumerableSet.sol      | https://github.com/OpenZeppelin/openzeppelin-contracts/blob/solc-0.6/contracts/utils/EnumerableSet.sol          |
| @openzeppelin/contracts/utils/EnumerableMap.sol      | https://github.com/OpenZeppelin/openzeppelin-<br>contracts/blob/solc-0.6/contracts/utils/EnumerableMap.sol      |
| @openzeppelin/contracts/token/ERC721/ERC721.sol      | https://github.com/OpenZeppelin/openzeppelin-contracts/blob/solc-0.6/contracts/token/ERC721/ERC721.sol          |
| @openzeppelin/contracts/utils/Context.sol            | https://github.com/OpenZeppelin/openzeppelin-contracts/blob/solc-0.6/contracts/utils/Context.sol                |
| @openzeppelin/contracts/utils/Strings.sol            | https://github.com/OpenZeppelin/openzeppelin-contracts/blob/solc-0.6/contracts/utils/Strings.sol                |
| @openzeppelin/contracts/cryptography/MerkleProof.sol | https://github.com/OpenZeppelin/openzeppelin-<br>contracts/blob/solc-0.6/contracts/cryptography/MerkleProof.sol |




# 5.3 CallGraph







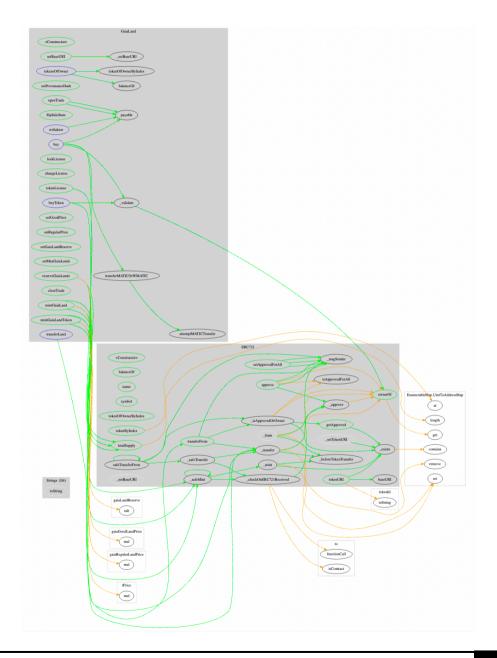






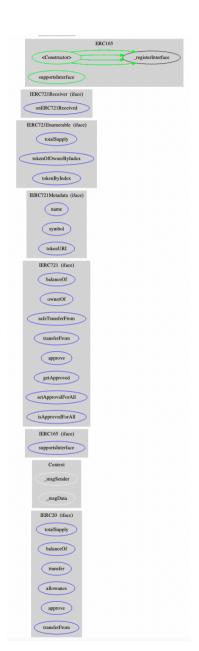

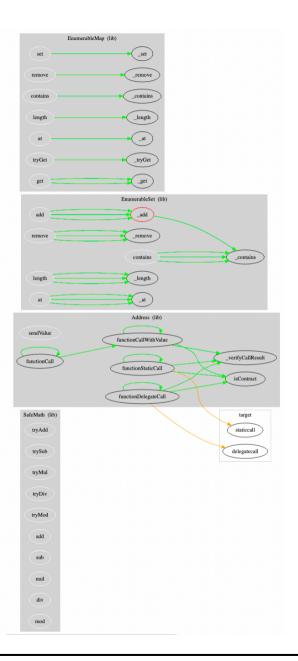





# 5.4 Inheritance Graph

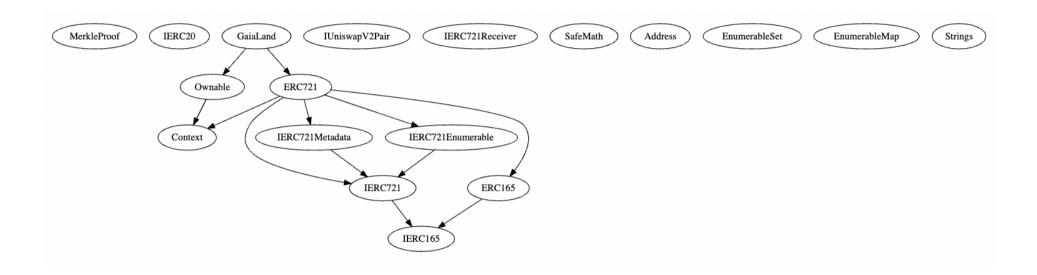




### 5.5 Source Lines & Risk

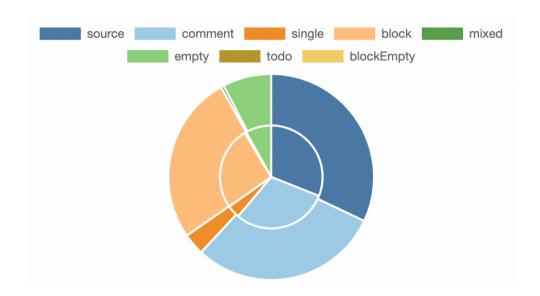

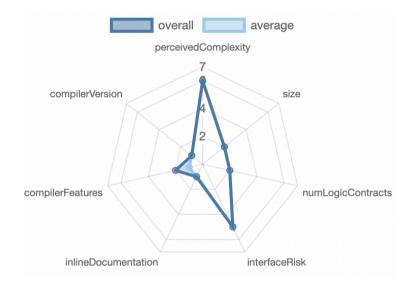



# 5.6 Capabilities

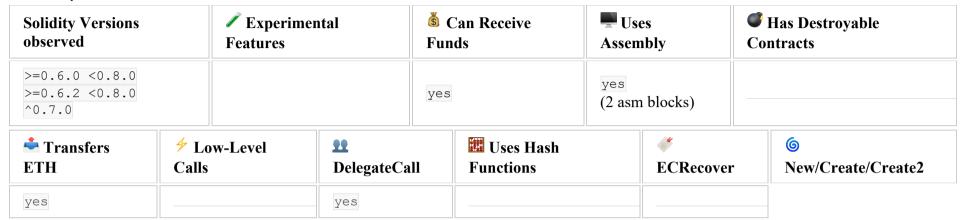

#### Exposed Functions

This section lists functions that are explicitly declared public or payable. Please note that getter methods for public stateVars are not included.



#### State Variables 5 4 1





# 5.7 Source Unites in Scope

| Туре     | File         | Logic<br>Contracts | Interfaces | Lines | nLines | nSLOC | Comment Lines | Complex.<br>Score | Capabilities    |
|----------|--------------|--------------------|------------|-------|--------|-------|---------------|-------------------|-----------------|
| <b>₩</b> | GAIALand.sol | 10                 | 7          | 2564  | 2041   | 921   | 1110          | 625               | ₩\$ +11*        |
| <b>≥</b> | Totals       | 10                 | 7          | 2564  | 2041   | 921   | 1110          | 625               | <b>₽\$÷11</b> * |

# Update 31st of March

| Туре        | File            | Logic<br>Contracts | Interfaces | Lines | nLines | nSLOC | Comment<br>Lines | Complex.<br>Score | Capabilities                     |
|-------------|-----------------|--------------------|------------|-------|--------|-------|------------------|-------------------|----------------------------------|
| <b>EQ</b>   | gaia_landv3.sol | 11                 | 7          | 2719  | 2159   | 1019  | 1116             | 690               | <b>■Š ÷••⊞</b> ×                 |
| > <b>\{</b> | Totals          | 11                 | 7          | 2719  | 2159   | 1019  | 1116             | 690               | <b>₽</b> Š <b>÷</b> Ω <b>#</b> × |

### Update 28th of April

| Typ<br>e  | File                       | Logic<br>Contract<br>s | Interfaces | Line<br>s | nLine<br>s | nSLO<br>C | Commen<br>t Lines | Complex . Score | Capabilitie<br>s    |
|---|----------------------------|------------------------|------------|-----------|------------|-----------|-------------------|-----------------|---------------------|
| 2-1-2-2-1<br>2-1-2-2-1<br>2-2-2-1<br>2-2-2-1                            | contracts/EverLand.s<br>ol | 1                      |            | 526       | 482        | 411       | 4                 | 280             | <b>Š</b> - <b>=</b> |
| to de maria<br>to de maria<br>to de maria<br>to de maria<br>to de maria | Totals                     | 1                      |            | 526       | 482        | 411       | 4                 | 280             | <b>Š÷⊞</b>          |

Legend: [-]



- Lines: total lines of the source unit
- nLines: normalized lines of the source unit (e.g. normalizes functions spanning multiple lines)
- nSLOC: normalized source lines of code (only source-code lines; no comments, no blank lines)
- Comment Lines: lines containing single or block comments
- **Complexity Score**: a custom complexity score derived from code statements that are known to introduce code complexity (branches, loops, calls, external interfaces, ...)

### 6. Scope of Work

The GAIA EverWorld Team provided us with the files that need to be tested. The scope of the audit is the GAIA NFT Land contract.


The team put forward the following assumptions regarding the security, usage of the contracts:

- The GAIA NFT Land is correctly implemented with the ERC721 Standard
- Owner cannot mint new land after minting was done
- Owner cannot burn land
- Owner is not able to pause the contract
- Minting of Land is random and can't be front run
- Mathematical calculations inside the contract are correctly performed
- The smart contract is coded according to the newest standards and in a secure way

The main goal of this audit was to verify these claims. The auditors can provide additional feedback on the code upon the client's request.



# 6.1 Findings Overview

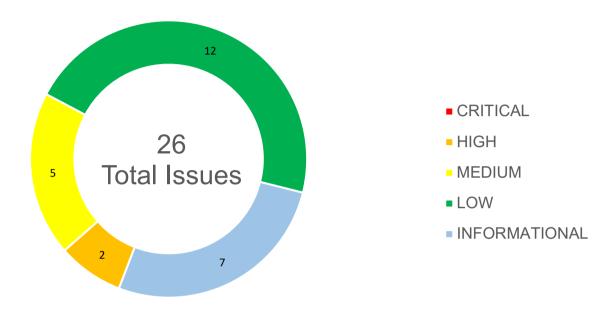

| No     | Title                                    | Severity | Status |
|--------|--|----------|--------|
| 6.2.1  | The Owner Can Increase The Fee To 1000   | HIGH     | FIXED  |
| 6.2.2  | Centralization Risks                     | HIGH     | FIXED  |
| 6.2.3  | Type Conversion Can Result Fee Bypassing | MEDIUM   | FIXED  |
| 6.2.4  | Overpowered Owner Rights                 | MEDIUM   | FIXED  |
| 6.2.5  | Missing Transfer Verification            | MEDIUM   | FIXED  |
| 6.2.6  | Ether Or Tokens Can Get Locked           | MEDIUM   | FIXED  |
| 6.2.7  | Race Condition                           | MEDIUM   | FIXED  |
| 6.2.8  | Missing Value Verification               | LOW      | FIXED  |
| 6.2.9  | Missing Zero Address Checks              | LOW      | FIXED  |
| 6.2.10 | Renounce Ownership                       | LOW      | FIXED  |
| 6.2.11 | Variable Could Be Declared Constant      | LOW      | FIXED  |



| 6.2.12 | Public Functions Should Be Declared As External | LOW           | FIXED        |
|--------|---|---------------|--------------|
| 6.2.13 | State Visibility Is Not Set                     | LOW           | FIXED        |
| 6.2.14 | Redundant Code                                  | LOW           | FIXED        |
| 6.2.15 | Missing Zero Address Checks                     | LOW           | FIXED        |
| 6.2.16 | Missing Events                                  | LOW           | FIXED        |
| 6.2.17 | Long Number Literals                            | LOW           | FIXED        |
| 6.2.18 | No Return Value Checks                          | LOW           | FIXED        |
| 6.2.19 | Inefficient Use Of Structs                      | LOW           | FIXED        |
| 6.2.20 | Missing Natspec Documentation                   | INFORMATIONAL | ACKNOWLEDGED |
| 6.2.21 | Floating Pragma Version Identified              | INFORMATIONAL | FIXED        |
| 6.2.22 | Floating Compiler Versions                      | INFORMATIONAL | FIXED        |
| 6.2.23 | Using Newest Compiler Version                   | INFORMATIONAL | FIXED        |
| 6.2.24 | Unnecessary Initializations                     | INFORMATIONAL | FIXED        |
| 6.2.25 | Unnecessary Argument In selectedMint()          | INFORMATIONAL | FIXED        |
| 6.2.26 | Isolate The Merkle Root Verification            | INFORMATIONAL | FIXED        |



# 6.2 Manual and Automated Vulnerability Test

### **CRITICAL ISSUES**

### **HIGH ISSUES**

6.2.1 The Owner Can Increase The Fee To 1000

Severity: HIGH Status: FIXED Code: NA

File(s) affected: EverLand.sol

Commit: https://github.com/GaiaEverworld/GAIAWhitelist/commit/e458d22ee9f4efe8d83ebfc8b2a5575aa3142152

| Attack / Description  | When a user buys a token using an auction, a portion of the price is taken by the contract as a commission. The commission percentage m_MarketingCommission is modifiable by the owner and can be updated to any value. If the owner or an malicious actor changes the percentage to 1000, the whole amount will be transferred as a fee, and the seller will not be able to get the expected price. |
|-----------------------|--|
| Code                  | <pre>Line: 507 - 509  function setMarketingCommission(uint256 _commission) external onlyOwner {     m_MarketingCommission = _commission; }</pre>   |
| Result/Recommendation | It is recommended to limit the value to a reasonable range and consider protecting the owner wallet with multi-signature.  |



#### 6.2.2 Centralization Risks

Severity: HIGH Status: FIXED Code: NA

File(s) affected: EverLand.sol

Commit: https://github.com/GaiaEverworld/GAIAWhitelist/commit/f182ac831d6b7df32fc187de8a124fad8a2fdafe

| Attack / Description  | The owner can burn any tokens using the burn function, and thus any user can lose the NFT at any time, this represents a centralization risk. |
|-----------------------|---|
| Code                  | Line: 420 - 423   |
|                       | <pre>function burn(uint256 _tokenId) external onlyOwner {     _burn(_tokenId);     m_BurnList[_tokenId] = true; }</pre>                       |
| Result/Recommendation | Remove this function or protect the owner wallet with multi-signature.  |

### **MEDIUM ISSUES**

6.2.3 Type Conversion Can Result Fee Bypassing

Severity: MEDIUM Status: FIXED Code: NA

File(s) affected: EverLand.sol

Commit: https://github.com/GaiaEverworld/GAIAWhitelist/commit/4c3f0a5dfec589aa8889e4f3eca7d8247793390f



| Attack / Description  | When a user buys an NFT using an auction, a portion of the price is taken by the contract as a commission. If the seller creates an auction with a price that is lower than, 1000/m_MarketingCommission the user can trade NFTs using auctions without paying the fees, due to a type conversion issue. |
|-----------------------|---|
| Code                  | <pre>Line: 367 - 370  uint256 _commissionValue = msg.value.mul(m_MarketingCommission).div(</pre>  |
| Result/Recommendation | It is recommended to require the transferred amount to be higher than 1000/m_MarketingCommission.   |

# 6.2.4 Overpowered Owner Rights

Severity: MEDIUM Status: FIXED Code: NA

| Attack / Description | Owners can perform privileged activities like withdraw funds from contract, reserve GAIALANDS to any address(can effectively burn by sending to zero address), pause contracts by making sale inactive, set the price, set maximum reserve and set maximum GAIALANDS (effectively being able to mint). The auditor has not recognized any multi sig structure. |
|----------------------|--|
| Code                 | function setMaxGaiaLands(uint256 newMaxGaiaLands) public onlyOwner {   |
|                      | MAX_GAIALANDS = newMaxGaiaLands;   |
|                      | }  |



```
function reserveGaiaLands(address to, uint256 reserveAmount)
                                     public
                                     onlyOwner
                                     uint256 supply = totalSupply();
                                     require(
                                       reserveAmount > 0 && reserveAmount <= gaiaLandReserve,
                                       'Not enough reserve left for team'
                                     );
                                     for (uint256 i = 0; i < reserveAmount; i++) {</pre>
                                       safeMint( to, supply + i);
                                     gaiaLandReserve = gaiaLandReserve.sub( reserveAmount);
Result/Recommendation
                                 It is recommended to use multisig wallet for owner privileges.
                                 Owner is able to pause contract via ability to call flipSaleState() function to make isActive(true or
                                 false) at any time without restriction
```

### 6.2.5 Missing Transfer Verification

Severity: MEDIUM Status: FIXED Code: NA

File(s) affected: EverLand.sol

Commit: https://github.com/GaiaEverworld/GAIAWhitelist/commit/70c7c20a1f65a98413df365cfd75c50746af1357



| Attack / Description  | The ERC20 standard token implementation functions return the transaction status as a Boolean. It is good practice to check for the return status of the function call, to ensure that the transaction was successful. It is the developer's responsibility to enclose these function calls with require() to ensure that, when the intended ERC20 function call returns 'false', the caller transaction also fails. |
|-----------------------|---|
| Code                  | <pre>Line: 97 - 100  function withdrawGaia() public onlyOwner {      uint256 gaiaBalance = IERC20(PGAIAA).balanceOf(address(this));      IERC20(PGAIAA).transfer(msg.sender, gaiaBalance);   }</pre>  |
| Result/Recommendation | Use the safeTransfer function from the safeERC20 Implementation or put the transfer call inside an assert or require to verify that the transfer has passed successfully.   |

#### 6.2.6 Ether Or Tokens Can Get Locked

Severity: MEDIUM Status: FIXED Code: NA

File(s) affected: EverLand.sol

Commit: https://github.com/GaiaEverworld/GAIAWhitelist/commit/e47052c9004c7f8c7310691b4ef7f20255466842

| Attack / Description | The user can buy an specific NFT by calling the buy function and paying the price specified in the auction. However, If the user sends ether or specified in the _price variable a value that is more than the required amount, they will not be able to get back the rest of the spent amount. Therefore, the remaining ether or tokens will be locked in the contract. |
|----------------------|--|
| Code                 | Line: 359 - 362  |



6.2.7 Race Condition

Severity: MEDIUM

Status: FIXED Code: NA

File(s) affected: EverLand.sol

Commit: https://github.com/GaiaEverworld/GAIAWhitelist/commit/3d11173309b443cd6afdb748d18191baf6ebb396

| Attack / Description | The user can mint NFTs using the PGAIAA token, depending on multiple parameters, some of them are m_EpicPrice or m_RegularPrice. These two variables can be changed by the owner. If a user mints any number of NFTs and the owner changes the price, there is a possibility that the owner's transaction will get minted first and the user's call will execute using the new price. This can make the user spend an unexpected number of tokens. |
|----------------------|--|
| Code                 | Line: 150 - 162  |
|                      | wintOFC makes   Jonateurs   4  |
|                      | <pre>uint256 price = _landType == 1</pre>  |
|                      | ? ((m_EpicPrice *  |
|                      | _countOfLands *  |



```
__prices[_landSize] *
    __prices[_landSize]) * (10**36)) / gaiaUSDC
: ((m_RegularPrice *
    __countOfLands *
    __prices[_landSize] *
    __prices[_landSize]) * (10**36)) / gaiaUSDC;
    require(IERC20(PGAIAA).transferFrom(msg.sender, address(this), price));
    __safeMintMultiple(msg.sender, _countOfLands, _landSize, _landType);
}

Result/Recommendation

It is recommended to notify via an event at price changes and to add the prices in the arguments, then add a require statement to make sure the prices in the arguments are the same as the ones stored in the contract.
```

#### **LOW ISSUES**

6.2.8 Missing Value Verification

Severity: LOW Status: FIXED Code: NA

File(s) affected: EverLand.sol

Commit: https://github.com/GaiaEverworld/GAIAWhitelist/commit/7e61794afeb75f0b85ffffa536f152e5ab895444

| Attack / Description | Certain functions lack a safety check in the values, the values of the arguments should be verified to allow only the ones that go with the contract's logic. In the setSaleDate function, the contract |
|----------------------|---|
|                      | should verify if m_SaleDate is greater than the current time.   |
| Code                 | Line: 475 - 478   |
|                      |   |
|                      | <pre>require( _ids.length == _countOfLands,</pre>   |



|                       | "Length of id array must be count params" );                       |
|-----------------------|--|
| Result/Recommendation | Consider verifying m_SaleDate to be greater than the current time. |

### 6.2.9 Missing Zero Address Checks

Severity: LOW Status: FIXED Code: NA

File(s) affected: EverLand.sol

Commit: https://github.com/GaiaEverworld/GAIAWhitelist/commit/c1223d79d1f75b2ab73f6560808bb2bbc125c386

| Attack / Description  | In the current implementation, there is an address set without checking for the zero address. This can lead to unintended behaviour. |
|-----------------------|--|
| Code                  | <pre>Line: 499 - 501  function setPGAIAContract(address _address) external onlyOwner {      PGAIAA = _address; }</pre>               |
| Result/Recommendation | It is recommended to check the addresses provided in the arguments for zero address (0).   |



6.2.10 Renounce Ownership

Severity: LOW Status: FIXED Code: CWE-283

File(s) affected: EverLand.sol

Commit: https://github.com/GaiaEverworld/GAIAWhitelist/commit/5b9d7f8d2b090578b43ba31ff8144098fa7d5c8e

| Attack / Description  | Typically, the contract's owner is the account that deploys the contract. As a result, the owner can perform certain privileged activities. The renounceOwnership function is used in smart contracts to renounce ownership. However, if the contract's ownership has never been transferred before renouncing it, it will never have an Owner, which may result in a denial of service. |
|-----------------------|--|
| Code                  | Line 11 contract EverLand is ERC721Enumerable, Ownable {   |
| Result/Recommendation | It is advised that the Owner cannot call renounceOwnership without first transferring ownership to a different address. Additionally, if a multi-signature wallet is utilized, executing the renounceOwnership method will require two or more users to sign the transaction. Alternatively, the Renounce Ownership functionality can be disabled by overriding it.                      |

### 6.2.11 Variable Could Be Declared Constant

Severity: LOW Status: FIXED Code: NA

| Attack / Description | Variables could be declared constant |
|----------------------|--------------------------------------|
|                      |                                      |



| Code                  | uint256 public MAX_GAIALANDS = 124884;   |
|-----------------------|--|
| Result/Recommendation | It is recommended to define constant variables properly with the constant keyword to improve code readability. |

### 6.2.12 Public Functions Should Be Declared As External

Severity: LOW Status: FIXED Code: NA

| Attack / Description | In the current implementation several functions are declared as public where they could be external. For public functions Solidity immediately copies array arguments to memory, while external functions can read directly from calldata. Because memory allocation is expensive, the gas consumption of public functions is higher. |
|----------------------|---|
| Code                 | function reserveGaiaLands(address _to, uint256 _reserveAmount)  |
|                      | public  |
|                      | onlyOwner  function tokenLicense(uint256 _id) public view returns (string memory)   |
|                      | function setGoodPrice(uint256 newPrice) public onlyOwner  |
|                      | function setRegularPrice(uint256 newPrice) public onlyOwner   |
|                      | function setMaxGaiaLands(uint256 newMaxGaiaLands) public onlyOwner  |



```
function setGaiaLandReserve(uint256 newGaiaLandReserve) public onlyOwner
                                 function mintGaiaLand(
                                     uint256 numberOfTokens,
                                    uint256 numberOfGoodLands,
                                    uint256 numberOfRegularLands
                                  ) public payable
                                 function mintGaiaLandToken(
                                     uint256 numberOfTokens,
                                    uint256 numberOfGoodLands,
                                    uint256 numberOfRegularLands,
                                    uint256 numberOfRate
                                  ) public
                                 function openTrade(
                                    uint256 _id,
                                    uint256 _price,
                                    uint256 duration,
                                    string memory unit,
                                    uint256 mintId
                                  ) public
                                function closeTrade(uint256 id) public
Result/Recommendation
                                We recommend declaring functions as external if they are not used internally. This leads to lower
                                gas consumption and better code readability.
```



# 6.2.13 State Visibility Is Not Set

Severity: LOW Status: FIXED Code: NA

File(s) affected: GAIALand.sol

| Attack / Description  | State variables without visibility set.                      |
|-----------------------|--|
| Code                  | <pre>bool licenseLocked = false;</pre>                       |
|                       |  |
|                       | address ownerAddress;  |
| Result/Recommendation | State variable must be declared internal, private or public. |
|                       | ,,,  |
|                       |  |

### 6.2.14 Redundant Code

Severity: LOW Status: FIXED Code: NA

| Attack / Description | The current implementation has a redundant code in function buy() and buyToken()                           |
|----------------------|--|
| Code                 | <pre>listedMap[_id] = false; in functions function buy(uint256 _id, uint256 _price) external payable</pre> |
|                      | function buyToken(uint256 _id, uint256 _price) external  |



| It is highly recommended to remove <code>listedMap[_id] = false</code> ; the redundant assignments for mappings as it unnecessarily increases code weight. Mappings have default values when looking up non-existing keys. For example mapping(address => bool) x a lookup of x[address] will return false if address does not exist. |
|---|
|   |

# 6.2.15 Missing Zero Address Checks

Severity: LOW Status: FIXED Code: NA

| Attack / Description  | In the current implementation several functions are not checking for zero addresses. Setting an address to the zero address can result in loosing funds by sending it to the zero address. |
|-----------------------|--|
| Code                  | function reserveGaiaLands(address _to, uint256 _reserveAmount)   |
|                       | public   |
|                       | onlyOwner  |
|                       | function transferLand(uint256 _id, address to) external  |
| Result/Recommendation | It is highly recommended to check address e.g require(_address != address(0))  |



# 6.2.16 Missing Events

Severity: LOW Status: FIXED Code: NA

| Attack / Description | Several functions will benefit from having events, which are allowing a proper tracking, logging in some cases.  |
|----------------------|--|
| Code                 | <pre>function setProvenanceHash(string memory provenanceHash) public onlyOwner {     GAIALANDS_PROVENANCE = provenanceHash; } function setGoodPrice(uint256 newPrice) public onlyOwner {     gaiaGoodLandPrice = newPrice; }</pre> |
|                      | <pre>function setRegularPrice(uint256 newPrice) public onlyOwner {    gaiaRegularLandPrice = newPrice; }</pre>   |
|                      | <pre>function setGaiaLandReserve(uint256 newGaiaLandReserve) public onlyOwner {    gaiaLandReserve = newGaiaLandReserve; }</pre>   |
|                      | <pre>function setMaxGaiaLands(uint256 newMaxGaiaLands) public onlyOwner {     MAX_GAIALANDS = newMaxGaiaLands; }</pre>   |
|                      | <pre>function withdraw() external onlyOwner {    uint256 balance = address(this).balance;</pre>  |



|                       | <pre>payable(ownerAddress).transfer(balance); }</pre>  |
|-----------------------|--|
| Result/Recommendation | It is recommended to emit events for these critical functions to allow tracking, monitoring, logging and alerting. |

### 6.2.17 Long Number Literals

Severity: LOW Status: FIXED Code: NA

File(s) affected: GAIALand.sol

| Attack / Description  | Long number literals hardcoded in the contracts are prone to errors.  |
|-----------------------|---|
| Code                  | <pre>uint256 public gaiaGoodLandPrice = 750000000000000; uint256 public gaiaRegularLandPrice = 25000000000000;</pre>                                |
| Result/Recommendation | It is highly recommended long number literals should be checked and written in scientific notation e.g 1e18 vs 100000000000000000000000000000000000 |

## 6.2.18 No Return Value Checks

Severity: LOW Status: FIXED Code: NA



| Attack / Description  | Contract may fail or work unexpectedly if return values are not checked.  |
|-----------------------|---|
| Code                  | <pre>function transferMATICOrWMATIC(address payable to, uint256 value) private {    if (!attemptMATICTransfer(to, value)) {         IWMATIC(WMATICAddress).deposit{value: value}();         IWMATIC(WMATICAddress).transfer(to, value);    } }</pre>                            |
| Result/Recommendation | It is highly recommended to check return values, especially low level calls or functions that return something. IWMATIC(WMATICAddress).transfer() function returns a bool that must be checked and can wrap in a require.  require(IWMATIC(WMATICAddress).transfer(to, value)); |


### 6.2.19 Inefficient Use Of Structs

Severity: LOW Status: FIXED Code: NA

File(s) affected: GAIALand.sol

| Attack / Description | Structs not properly used in terms of variable sizes, and ordering may result in higher gas costs. |  |  |
|----------------------|--|--|--|
| Code                 | struct Auction {   |  |  |
|                      | uint256 price;   |  |  |
|                      | string unit;   |  |  |
|                      | uint256 duration;  |  |  |
|                      | uint256 startTime;   |  |  |
|                      | <pre>uint256 endTime;</pre>  |  |  |



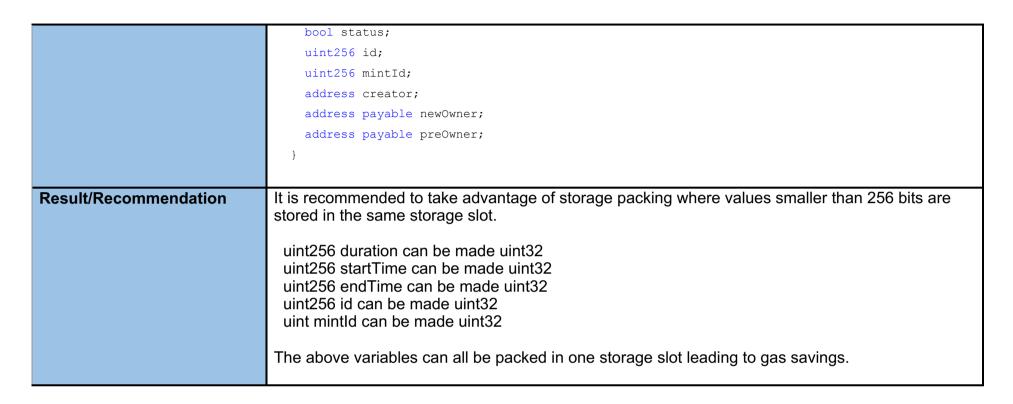

### **INFORMATIONAL ISSUES**

6.2.20 Missing Natspec Documentation

Severity: INFORMATIONAL Status: ACKNOWLEDGED

Code: NA

File(s) affected: GAIALand.sol



| Attack / Description  | Solidity contracts can use a special form of comments to provide rich documentation for function, return variables, and more. This special form is named Ethereum Natural Language Specification Format(NatSpec). |
|-----------------------|---|
| Code                  |   |
| Result/Recommendation | It is recommended to include natspec documentation and follow the doxygen style including @author, @title, @notice, @dev, @param, @return and make it easier to review and understand your smart contract.        |

### 6.2.21 Floating Pragma Version Identified

Severity: INFORMATIONAL

Status: FIXED Code: SWC-103 File(s) affected: ALL

Commit: https://github.com/GaiaEverworld/GAIAWhitelist/commit/b487f7d4127dc4ac27182b380758ec716bdfd52b

| Attack / Description  | It is recommended to specify a fixed compiler version to ensure that the bytecode produced does not vary between builds. This is especially important if you rely on bytecode-level verification of the code.   |
|-----------------------|---|
| Code                  | Line 1 pragma solidity ^0.8.9;  |
| Result/Recommendation | It is recommended to follow the latter example, as future compiler versions may handle certain language constructions in a way the developer did not foresee. It is advised that floating pragma should not be used in production. Both truffle-config.js and hardhat.config.js support locking the pragma version.  i.e. Pragma solidity 0.8.9 |



# 6.2.22 Floating Compiler Versions

Severity: INFORMATIONAL

Status: FIXED Code: SWC-103

File(s) affected: GAIALand.sol

| Attack / Description  | The current pragma solidity directive is floating. It is recommended to specify a fixed compiler version to ensure that the bytecode produced does not vary between builds. This is especially important if you rely on bytecode-level verification of the code. |
|-----------------------|--|
| Code                  | pragma solidity ^0.7.0;  |
| Result/Recommendation | It is recommended to follow the latter example, as future compiler versions may handle certain language constructions in a way the developer did not foresee. i.e. Pragma solidity 0.7.0  See SWC-103: https://swcregistry.io/docs/SWC-103                       |

### 6.2.23 Using Newest Compiler Version

Severity: INFORMATIONAL

Status: FIXED Code: NA

File(s) affected: GAIALand.sol

| Attack / Description A higher compiler version has in most cases new features implemented or bugs fixed. |
|--|
|--|



| Code                  | pragma solidity ^0.7.0;   |
|-----------------------|---|
|                       |   |
| Result/Recommendation | It is recommended to use the stable version 0.8.4 where abicoderv2 added and overflow underflow |
|                       | checked automatically   |
|                       |   |
|                       |   |

### 6.2.24 Unnecessary Initializations

Severity: INFORMATIONAL

Status: FIXED Code: NA

File(s) affected: EverLand.sol

Commit: <a href="https://github.com/GaiaEverworld/GAIAWhitelist/commit/6e11a32805709b8771bdccf525fe349b2c6e5be1">https://github.com/GaiaEverworld/GAIAWhitelist/commit/6e11a32805709b8771bdccf525fe349b2c6e5be1</a>

| Attack / Description  | When a variable is declared in solidity, it gets initialized with its type's default value.                          |  |
|-----------------------|--|--|
| Code                  | Line 29 - 31  bool private m_IsMintable = false;  bool private m_IsPublic = false;  bool private m_IsActive = false; |  |
| Result/Recommendation | There is no need to initialize a variable with the default value.  |  |



6.2.25 Unnecessary Argument In selectedMint()

Severity: INFORMATIONAL

Status: FIXED Code: NA

File(s) affected: EverLand.sol

Commit: https://github.com/GaiaEverworld/GAIAWhitelist/commit/654691d731677b2baf23c56511a14ef4cc4cbf60

| Attack / Description  | Consider using directly the length of the array 'ids' and removing the _countOfLands argument.  |  |  |
|-----------------------|---|--|--|
| Code                  | <pre>Line 163 - 178 function selectedMint(     uint256 _countOfLands,     uint256[] memory _ids,     uint256 _index,     uint256 _amount,     bytes32[] memory _merkleProof ) external {     require(m_IsMintable, "Sale must be active to mint Lands");     require(         _countOfLands &gt; 0 &amp;&amp; _countOfLands &lt;= MAX_PURCHASE,         "Can only mint 200 tokens at a time" );     require(         _ids.length == _countOfLands,         "Length of id array must be count params" );</pre> |  |  |
| Result/Recommendation | NA NA   |  |  |



6.2.26 Isolate The Merkle Root Verification

Severity: INFORMATIONAL

Status: FIXED Code: NA

File(s) affected: EverLand.sol

Commit: https://github.com/GaiaEverworld/GAIAWhitelist/commit/10b7304374097964e13a14d3b7bd194eea5b308a

| Attack / Description  | It is recommended to isolate the verification of the Merkle root and the business logic function into a separate modifier for clean architecture.   |  |  |
|-----------------------|---|--|--|
| Code                  | <pre>Line 206 - 210 bytes32 node = keccak256(abi.encodePacked(_index, msg.sender, _amount));     require(          MerkleProof.verify(_merkleProof, m_MerkleRoot, node),          "Invalid proof."     );</pre> |  |  |
| Result/Recommendation | NA  |  |  |



# 6.3 SWC Attacks

| ID             | Title   | Relationships  | Test<br>Result |
|----------------|---|--|----------------|
| SWC-131        | Presence of unused variables                      | CWE-1164: Irrelevant Code  | <b>~</b>       |
| SWC-130        | Right-To-Left-Override control character (U+202E) | CWE-451: User Interface (UI) Misrepresentation of Critical Information | <b>▼</b>       |
| SWC-129        | Typographical Error                               | CWE-480: Use of Incorrect Operator                                     | <b>~</b>       |
| SWC-128        | DoS With Block Gas Limit                          | CWE-400: Uncontrolled Resource Consumption                             | <b>▼</b>       |
| <u>SWC-127</u> | Arbitrary Jump with Function<br>Type Variable     | CWE-695: Use of Low-Level Functionality                                | <b>~</b>       |
| <u>SWC-125</u> | Incorrect Inheritance Order                       | CWE-696: Incorrect Behavior Order                                      | <b>✓</b>       |
| <u>SWC-124</u> | Write to Arbitrary Storage<br>Location            | CWE-123: Write-what-where Condition                                    | <b>▼</b>       |
| SWC-123        | Requirement Violation                             | CWE-573: Improper Following of Specification by Caller                 | <b>▽</b>       |



| ID             | Title  | Relationships  | Test<br>Result |
|----------------|--|--|----------------|
| <u>SWC-122</u> | Lack of Proper Signature<br>Verification               | CWE-345: Insufficient Verification of Data Authenticity  | <b>▽</b>       |
| SWC-121        | Missing Protection against<br>Signature Replay Attacks | CWE-347: Improper Verification of Cryptographic Signature  | V              |
| <u>SWC-120</u> | Weak Sources of Randomness from Chain Attributes       | CWE-330: Use of Insufficiently Random Values   | <b>~</b>       |
| SWC-119        | Shadowing State Variables                              | CWE-710: Improper Adherence to Coding Standards  | <b>▼</b>       |
| SWC-118        | Incorrect Constructor Name                             | CWE-665: Improper Initialization   | V              |
| SWC-117        | Signature Malleability                                 | CWE-347: Improper Verification of Cryptographic Signature  | V              |
| SWC-116        | Timestamp Dependence                                   | CWE-829: Inclusion of Functionality from Untrusted Control Sphere                                    | <b>▼</b>       |
| SWC-115        | Authorization through tx.origin                        | CWE-477: Use of Obsolete Function  | V              |
| SWC-114        | Transaction Order Dependence                           | CWE-362: Concurrent Execution using Shared Resource with Improper Synchronization ('Race Condition') | <b>▼</b>       |



| ID             | Title                                   | Relationships   | Test<br>Result |
|----------------|---|---|----------------|
| SWC-113        | DoS with Failed Call                    | CWE-703: Improper Check or Handling of Exceptional Conditions     | <b>✓</b>       |
| SWC-112        | Delegatecall to Untrusted Callee        | CWE-829: Inclusion of Functionality from Untrusted Control Sphere | <b>~</b>       |
| <u>SWC-111</u> | Use of Deprecated Solidity<br>Functions | CWE-477: Use of Obsolete Function                                 | <b>~</b>       |
| <u>SWC-110</u> | Assert Violation                        | CWE-670: Always-Incorrect Control Flow Implementation             | <b>✓</b>       |
| SWC-109        | Uninitialized Storage Pointer           | CWE-824: Access of Uninitialized Pointer                          | <b>▼</b>       |
| <u>SWC-108</u> | State Variable Default Visibility       | CWE-710: Improper Adherence to Coding Standards                   | <b>▼</b>       |
| SWC-107        | Reentrancy                              | CWE-841: Improper Enforcement of Behavioral Workflow              | <b>▼</b>       |
| SWC-106        | Unprotected SELFDESTRUCT Instruction    | CWE-284: Improper Access Control                                  | <b>▽</b>       |
| <u>SWC-105</u> | Unprotected Ether Withdrawal            | CWE-284: Improper Access Control                                  | <b>▼</b>       |
| SWC-104        | Unchecked Call Return Value             | CWE-252: Unchecked Return Value                                   | <b>✓</b>       |



| ID      | Title                          | Relationships  | Test<br>Result |
|---------|--------------------------------|--|----------------|
| SWC-103 | Floating Pragma                | CWE-664: Improper Control of a Resource Through its Lifetime | X              |
| SWC-102 | Outdated Compiler Version      | CWE-937: Using Components with Known Vulnerabilities         | <b>~</b>       |
| SWC-101 | Integer Overflow and Underflow | CWE-682: Incorrect Calculation                               | <b>~</b>       |
| SWC-100 | Function Default Visibility    | CWE-710: Improper Adherence to Coding Standards              | <b>✓</b>       |



## 6.4 Verify Claims

6.4.1 The GAIA NFT Land is correctly implemented with the ERC721 Standard

Status: tested and verified ✓

**6.4.2** Owner cannot mint new land after minting was done

Status: tested and verified

**6.4.3** Owner cannot burn land **Status:** tested and verified **✓** 

**6.4.4** Owner is not able to pause the contract

**Status:** Owner is able to pause contract via ability to call flipSaleState() function to make isActive(true or false) at any time without restriction.

**6.4.5** Minting of Land is random and can't be front run

Status: tested and verified ✓

6.4.6 Mathematical calculations inside the contract are correctly performed

Status: tested and verified 

✓

**6.4.7** The smart contract is coded according to the newest standards and in a secure way

Status: tested and verified ✓



## 7. Executive Summary

Two (2) independent Chainsulting experts performed an unbiased and isolated audit of the smart contract codebase. The final debriefs took place on the January 28, 2022.

Main goal of the audit was to verify the claims regarding the security of the smart contract. During the audit, 1 Medium, 9 Low and 3 Informational issues were found, after the manual and automated security testing and not all claims have been successfully verified. Please check all issues and get back to your auditor when issues have been fixed.

Update: <a href="https://polygonscan.com/address/0xF6e3c3184c9e58D2d3d520B7D7D79feE1B5E8732#code">https://polygonscan.com/address/0xF6e3c3184c9e58D2d3d520B7D7D79feE1B5E8732#code</a> Re-check has been done at the 25th of March 2022.

Update: <a href="https://polygonscan.com/address/0xa09795ec053826ecea14ca48346327bb33e90a78#code">https://polygonscan.com/address/0xa09795ec053826ecea14ca48346327bb33e90a78#code</a> Re-check has been done at the 31st of March 2022. Merkle tree has been added for whitelisting's

Update: https://github.com/GaiaEverworld/GAIAWhitelist Re-check has been done at the 28th of April 2022.

Update: <a href="https://github.com/GaiaEverworld/GAIAWhitelist">https://github.com/GaiaEverworld/GAIAWhitelist</a> Re-check has been done at the 29<sup>th</sup> of April 2022, all issues have been addressed and fixed.

### 8. Deployed Smart Contract

#### **VERIFIED**

https://polygonscan.com/address/0x2a81cb0f4813ea2877880330a5a1a8cf732ca0b0#code



#### 9. About the Auditor

Chainsulting is a professional software development firm based in Germany that provides comprehensive distributed ledger technology (DLT) solutions. Some of their services include blockchain development, smart contract audits and consulting.

Chainsulting conducts code audits on market-leading blockchains such as Hyperledger, Tezos, Ethereum, Binance Smart Chain, and Solana to mitigate risk and instil trust and transparency into the vibrant crypto community. They have also reviewed and secure the smart contracts of 1Inch, POA Network, Unicrypt, Amun, Furucombo among numerous other top DeFi projects.

Chainsulting currently secures \$100 billion in user funds locked in multiple DeFi protocols. The team behind the leading audit firm relies on their robust technical know-how in the blockchain sector to deliver top-notch smart contract audit solutions tailored to the clients' evolving business needs.

The blockchain security provider brings the highest security standards to crypto and blockchain platforms, helping to foster growth and transparency within the fast-growing ecosystem.

Check our website for further information: https://chainsulting.de



