


Dynamic Maps Engine Layer

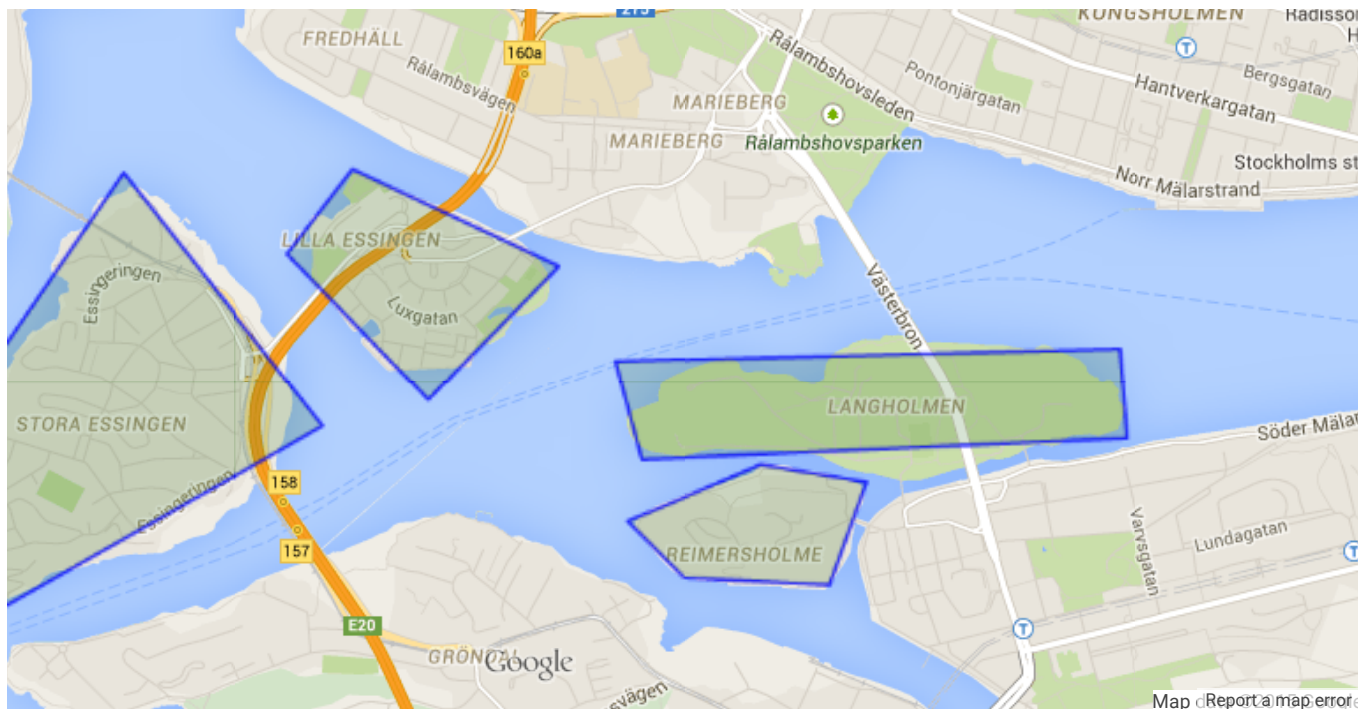

View this example [full screen](#).

JavaScript

JavaScript + HTML

```
function initialize() {  
  
  var fillArray = ['red', 'blue', 'yellow', 'green'];  
  
  var mapOptions = {  
    zoom: 14,  
    center: new google.maps.LatLng(59.322506, 18.010025)  
  };  
  
  var map = new google.maps.Map(document.getElementById('map-canvas'),  
    mapOptions);  
  
  var layer = new google.maps.visualization.DynamicMapsEngineLayer({  
    layerId: '06673056454046135537-08896501997766553811',  
    map: map,  
    suppressInfoWindows: true,  
    clickable: true  
  });  
  
  google.maps.event.addListener(layer, 'mouseover', function(event) {
```

```
var style = layer.getFeatureStyle(event.featureId);
style.fillColor = fillArray[event.featureId - 1];
style.fillOpacity = '0.8';
});

google.maps.event.addListener(layer, 'mouseout', function(event) {
  var style = layer.getFeatureStyle(event.featureId).resetAll();
});
}
google.maps.event.addDomListener(window, 'load', initialize);
```

Except as otherwise noted, the content of this page is licensed under the [Creative Commons Attribution 3.0 License](#), and code samples are licensed under the [Apache 2.0 License](#). For details, see our [Site Policies](#).

Last updated March 17, 2015.