


Version
0.1-0

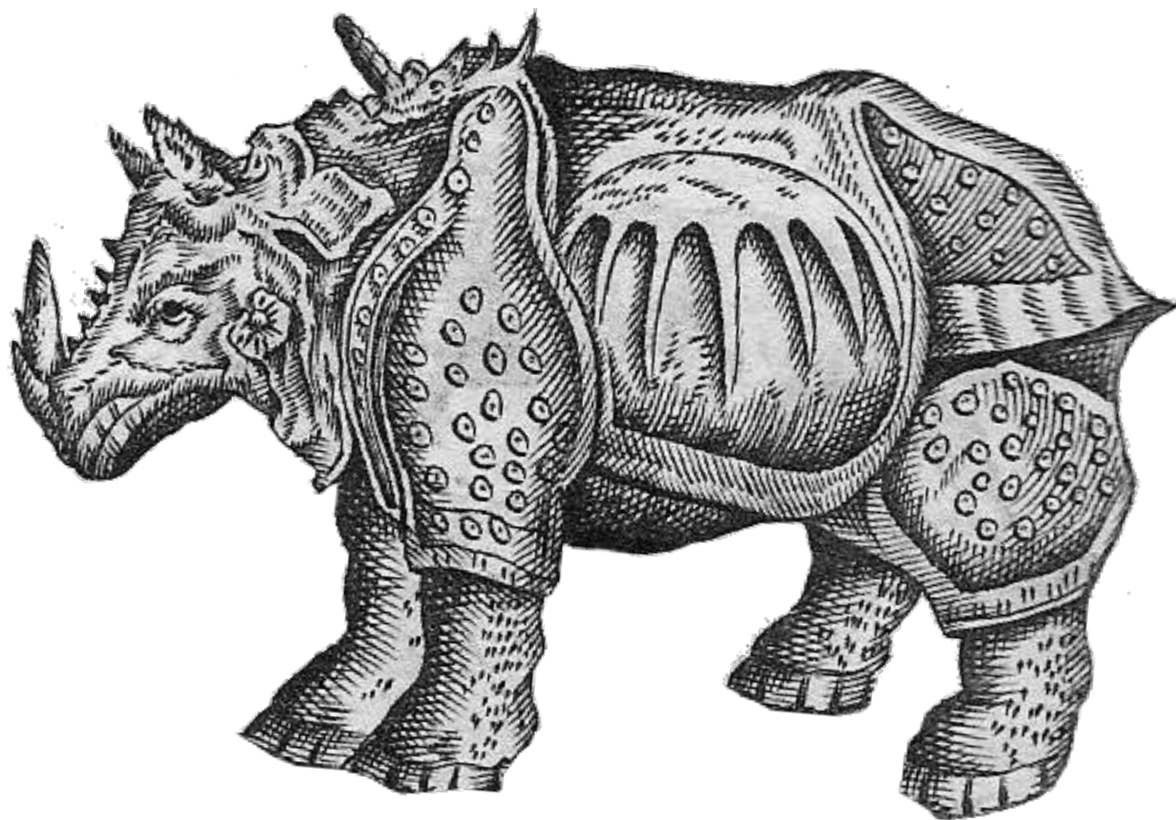

Programming with Big Data in R

Guide to the pbdPAPI Package

Performance Analysis Tools for R

pbdR Core Team

GUIDE TO THE pbdPAPI PACKAGE

PERFORMANCE ANALYSIS TOOLS FOR R

JUNE 2, 2014

DREW SCHMIDT

*National Institute for Computational Sciences
University of Tennessee*

CHRISTIAN HECKENDORF

*Boston University
Boston, Massachusetts*

WEI-CHEN CHEN

*Department of Ecology and Evolutionary Biology
University of Tennessee*

GEORGE OSTROUCHOV

*Computer Science and Mathematics Division,
Oak Ridge National Laboratory*

PRAGNESHKUMAR PATEL

*National Institute for Computational Sciences
University of Tennessee*



VERSION 0.1-0

Acknowledgement

Heckendorf was generously supported by Google for Google Summer of Code 2014.

Chen was supported in part by the Department of Ecology and Evolutionary Biology at the University of Tennessee, Knoxville, and a grant from the National Science Foundation (MCB-1120370.)

© 2014 pbdR Core Team.

Permission is granted to make and distribute verbatim copies of this vignette and its source provided the copyright notice and this permission notice are preserved on all copies.

This manual may be incorrect or out-of-date. The authors assume no responsibility for errors or omissions, or for damages resulting from the use of the information contained herein.

Cover art is *A Rhinoceros*, Richard Hall, ca. 1740.

This publication was typeset using L^AT_EX.

Contents

Acknowledgement	3
1 Introduction	1
2 Installation	1
2.1 Important Note	1
2.2 WITHOUT a System Installation of PAPI	2
2.3 WITH an Existing System Installation of PAPI	2
3 Performance Measurement	3
3.1 flips and flops	3
3.2 Cache Misses and Cache Hits	3
4 Using pbdPAPI	4
4.1 High-Level Interface	5
4.2 Low-Level Interface	5
5 Examples	5
5.1 flops	5
5.2 Cache Misses	5

1 Introduction

The value of profiling code is indisputable; if you disagree, stop pretending that you actually care about data. R's own `Rprof()` function is extremely useful, but its profiling capabilities are limited to simple timings of R functions. This is a very good starting point in performance analysis and can quickly help the R programmer focus in on bottlenecks. But for more experienced developers (especially those working with compiled code) additional performance information can be invaluable. Access to low-level hardware counter data can have tremendous impact when trying to understand and optimize performance of compiled code.

The **pbDPAPI** (?) package offers access to this low-level hardware counter information by way of the high-level C library **PAPI** (?). Therefore, an installation of **PAPI** is required in order to use the package. For convenience, we bundle **PAPI** version 5.3.0 with **pbDPAPI**, which will install by default. However, with appropriate configure arguments, one can easily build **pbDPAPI** with an existing system installation of **PAPI**. See Section 2 for details.

The current main features of **pbDPAPI** include:

1. Simple, high-level interfaces that mimic R's own profiling syntax.
2. A low-level interface that mimics **PAPI**'s native calls, with extremely general functionality.

Note that the **pbDPAPI** package is not officially affiliated with the **PAPI** project in any way.

2 Installation

In this section, we will describe the various ways that one can install the **pbDPAPI** package.

2.1 Important Note

It is possible for **PAPI** and/or **pbDPAPI** to build, but still have no access to any counter information. For example, the package will build on a Raspberry Pi, but that hardware does not have any hardware counters. If the package installs without error, you can see how many hardware counters you have available by executing:

```
1 library(pbdPAPI)
2 system.ncounters()
```

For a detailed list of all counters and whether or not your platform supports them, simply call

```
1 library(pbdPAPI)
2 papi.avail()
```

2.2 WITHOUT a System Installation of PAPI

This is the default method of installation. Here, the **PAPI** library will automatically be built first as a static library, and then the **pbDPAPI** package will be built and linked against that static library. All of this is handled completely transparently, and should only go wrong if your system is not supported by **PAPI**. This is the simplest approach, and should cover most users. Simply build the package as you would any other:

Shell Command

```
R CMD INSTALL pbdPAPI_0.1-0.tar.gz
```

and using the **devtools** package:

```
1 library(devtools)
2 install_github(username="wrathematics", repo="pbdPAPI")
```

2.3 WITH an Existing System Installation of PAPI

If you already have a system installation of **PAPI** available, it makes more sense to link with that existing library. The one catch is that the static library *must* have been compiled with **-fPIC**, which is non-standard. To build an external **PAPI** library in this way, you should do so by first setting:

Shell Command

```
export CC="${CC} -fPIC"
```

Assuming that **CC** is set; if not, you can use **cc** in the right hand side.

To link with an external installation of **PAPI**, from the command line, execute:

Shell Command

```
R CMD INSTALL pbdPAPI_0.1-0.tar.gz \
  --configure-args="--enable-system-papi \
  --with-papi-home=location/of/PAPI/install"
```

and using the **devtools** package:

```
library(devtools)
install_github(username="wrathematics", repo="pbdPAPI",
  args="--configure-args='--enable-system-papi
  --with-papi-home=location/of/PAPI/install'")
```

3 Performance Measurement

3.1 flips and flops

flips This is intended to measure *instruction* rate through the floating point pipe with no massaging.

flops Perhaps the more well-known measurement is the rate of floating point *operations*.

Calling `system.flops(expr)` on a valid R expression `expr` will produce system and processor timings, the number of floating point operations, and the Mflops.

The `pca` demo shows off this functionality with principal components analysis. Executing:

```
demo("pca", "pbdPAPI")
```

on an Intel Sandy Bridge Core i5 produces the following outputs:

	m	n	measured	theoretical	difference	pct.error	mflops
1	10000	50	211875901	202500000	9375901	4.425185	1637.195

Theoretical flops

$\text{flops} = (\# \text{ cores}) * (\# \text{ of SSE units per core}) * (\text{cycles} / \text{second}) * (\# \text{ SSE operations per cycle})$

single precision (divide by 2 for double precision).

So for this Intel Sandy Bridge Core i5 again as a reference, the

$$\begin{aligned} \text{Mflops} &= (4) * (2) * (3200\text{Mhz}) * 2 \\ &= 25600 \end{aligned}$$

or about 25 Gflops (25,000,000,000 flops), aka, a hell of a lot of arithmetic.

3.2 Cache Misses and Cache Hits

Memory and Cache Computers operate at *billions* of cycles per second. Of course, those operations occur on data. A useful abstraction we use in thinking about processing data is you load the stuff up into ram and then the processor does things to it. This is usually fine, or at least convenient, but it's not accurate, as you are probably aware.

Another more accurate abstraction is that shown in Figure 1. In a sense, the magic really happens when things get into the CPU registers. But something that's in ram that you want to

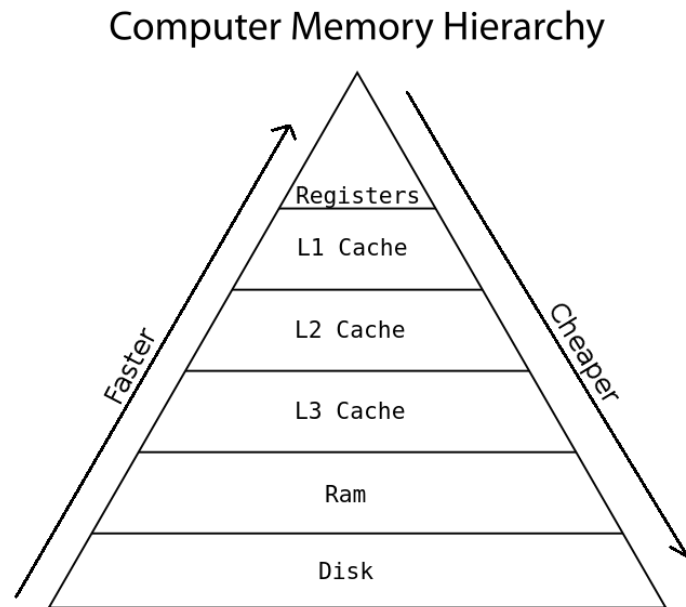


Figure 1: Memory Hierarchy

operate on, as it's headed to the CPU, it gets cached into various levels of (comparatively) fast access storage along the way. Not understanding this (simplified from reality) architecture can have can cause some pretty nasty performance side-effects. on your code. If you're unfamiliar with this, I would strongly encourage you to check out this really cool interactive [visualization](#) showing (relative) speeds of cache misses, also shown in Figure ???. It too involves some hefty simplifications of how modern hardware actually works, so if this is at all confusing, let us all take a moment to pity the tragic life of the computer engineer.

Latency Numbers

Cache Misses Fundamentally, a cache miss occurs when the cache needs some piece of data to pass along to registers, but it isn't immediately available and has to go digging through ram (or god help you, disk) to get it. Cache misses are bad and reduce performance. You can't get rid of them, unless your entire problem fits into cache (which is glorious when it happens), but you can eliminate *unnecessary* cache misses being aware of how your data and algorithms interact with cache. When people tell you things like "R's matrices are column-major" or that you should loop over columns then rows, this is exactly what they are talking about.

4 Using pbdPAPI

The **pbdPAPI** package has 2 distinct interfaces for gathering performance data, one low-level and "one" high-level. The low-level interface is reminiscent of **PAPI**'s own native C interface, and "the" high-level interface is a collection of similar-looking wrappers around this interface.

4.1 High-Level Interface

4.2 Low-Level Interface

The low-level interface is provided for users who more familiar with hardware and may have questions about the operation of a block of code that do not easily fall into the the set of wrappers that make up the high-level interface. Even this comes in two forms. The first is the `system.event()` interface, which looks like the high-level interface functions, except that you must explicitly supply a **PAPI** events vector, with event names stored as strings. For a list of all possible events, and how to determine which are supported on your platform, see the R help `?papi.avail`.

As an example, suppose you wanted to measure the level 1 data cache misses and L1 data cache hits. After looking up the names for these events in the help file mentioned just above, you would simply call

```
1 events <- c("PAPI_L1_DCM", "PAPI_L1_DCH")
2 system.event(1+1, events=events)
```

Here, replace `1+1` with your preferred computation.

The final form of the low-level interface is essentially a deconstruction of the code making up the body of the `system.event()` function. This would allow you to skip several forms of error checking (if you want to do that for some reason). Primarily its purpose is to resemble the native C-level **PAPI** interface. We really don't recommend you use this, but it's there if you really believe you need it.

Revisiting the above example, you would call:

```
1 events <- c("PAPI_L1_DCM", "PAPI_L1_DCH")
2
3 papi.start(events=events)
4 1+1
5 papi.stop(events=events)
```

5 Examples

5.1 flops

To see the full source code described in this example, see the `matprod` demo in **pbdPAPI**.

5.2 Cache Misses

To see the full source code described in this example, see the `cache_access` demo in **pbdPAPI**.

Consider the following example, where we will fill a matrix with 1's, first by looping over rows then columns, and then by looping over columns then rows. For maximum effect, we will be dropping to C by way of **Rcpp**. If you do not have **Rcpp** installed on your system, you can still follow along (even if you don't know C++), but you will not be able to recreate the timings locally.

```

1  library(inline)
2
3  bad_cache_access <- "
4      int i, j;
5      const int n = INTEGER(n_)[0];
6      Rcpp::NumericMatrix x(n, n);
7
8
9      for (i=0; i<n; i++)
10         for (j=0; j<n; j++)
11             x(i, j) = 1.;
12
13     return x;
14 "
15
16 good_cache_access <- "
17     int i, j;
18     const int n = INTEGER(n_)[0];
19     Rcpp::NumericMatrix x(n, n);
20
21
22     for (j=0; j<n; j++)
23         for (i=0; i<n; i++)
24             x(i, j) = 1.;
25
26     return x;
27 "
28
29
30 bad <- cxxfunction(signature(n_="integer"),
31                    body=bad_cache_access, plugin="Rcpp")
32 good <- cxxfunction(signature(n_="integer"),
33                     body=good_cache_access, plugin="Rcpp")

```

A quick check of run times shows something drastically different happening:

```

n <- 10000L

system.time(bad(n))
#   user  system elapsed
#  1.016    0.232    1.259

```

```
system.time(good(n))
#   user   system elapsed
# 0.201   0.155   0.357
```

So even though we (mathematically) are doing the exact same thing, the run times differ by a factor of 3.5. **pbdPAPI** allows us to more thoroughly see what's happening. If we use `system.cache()` to check the L1, L2, and L3 cache misses for each of these functions:

```
library(pbdPAPI)
n <- 10000L

system.cache(bad(n))
# $L1.total
#[1] 193580295
#
# $L2.total
#[1] 159442230
#
# $L3.total
#[1] 16895275

system.cache(good(n))
# $L1.total
#[1] 15552007
#
# $L2.total
#[1] 11580023
#
# $L3.total
#[1] 801150
```

it should be readily apparent what is going on now. The L1 cache misses differ by more than an order of magnitude, 194 million to 16 million!