41 components, one token source, two platforms

What we learned repackaging UX4G for React and React Native

One token file drives both the web and native kits


41

components shipped in @hopline/ux4g-react

Each one built to WCAG 2.2 AA and published as a shadcn registry entry.

Source: github.com/Hopline-AI/ux4g README, 2026

Most of the work sat in forms and feedback components

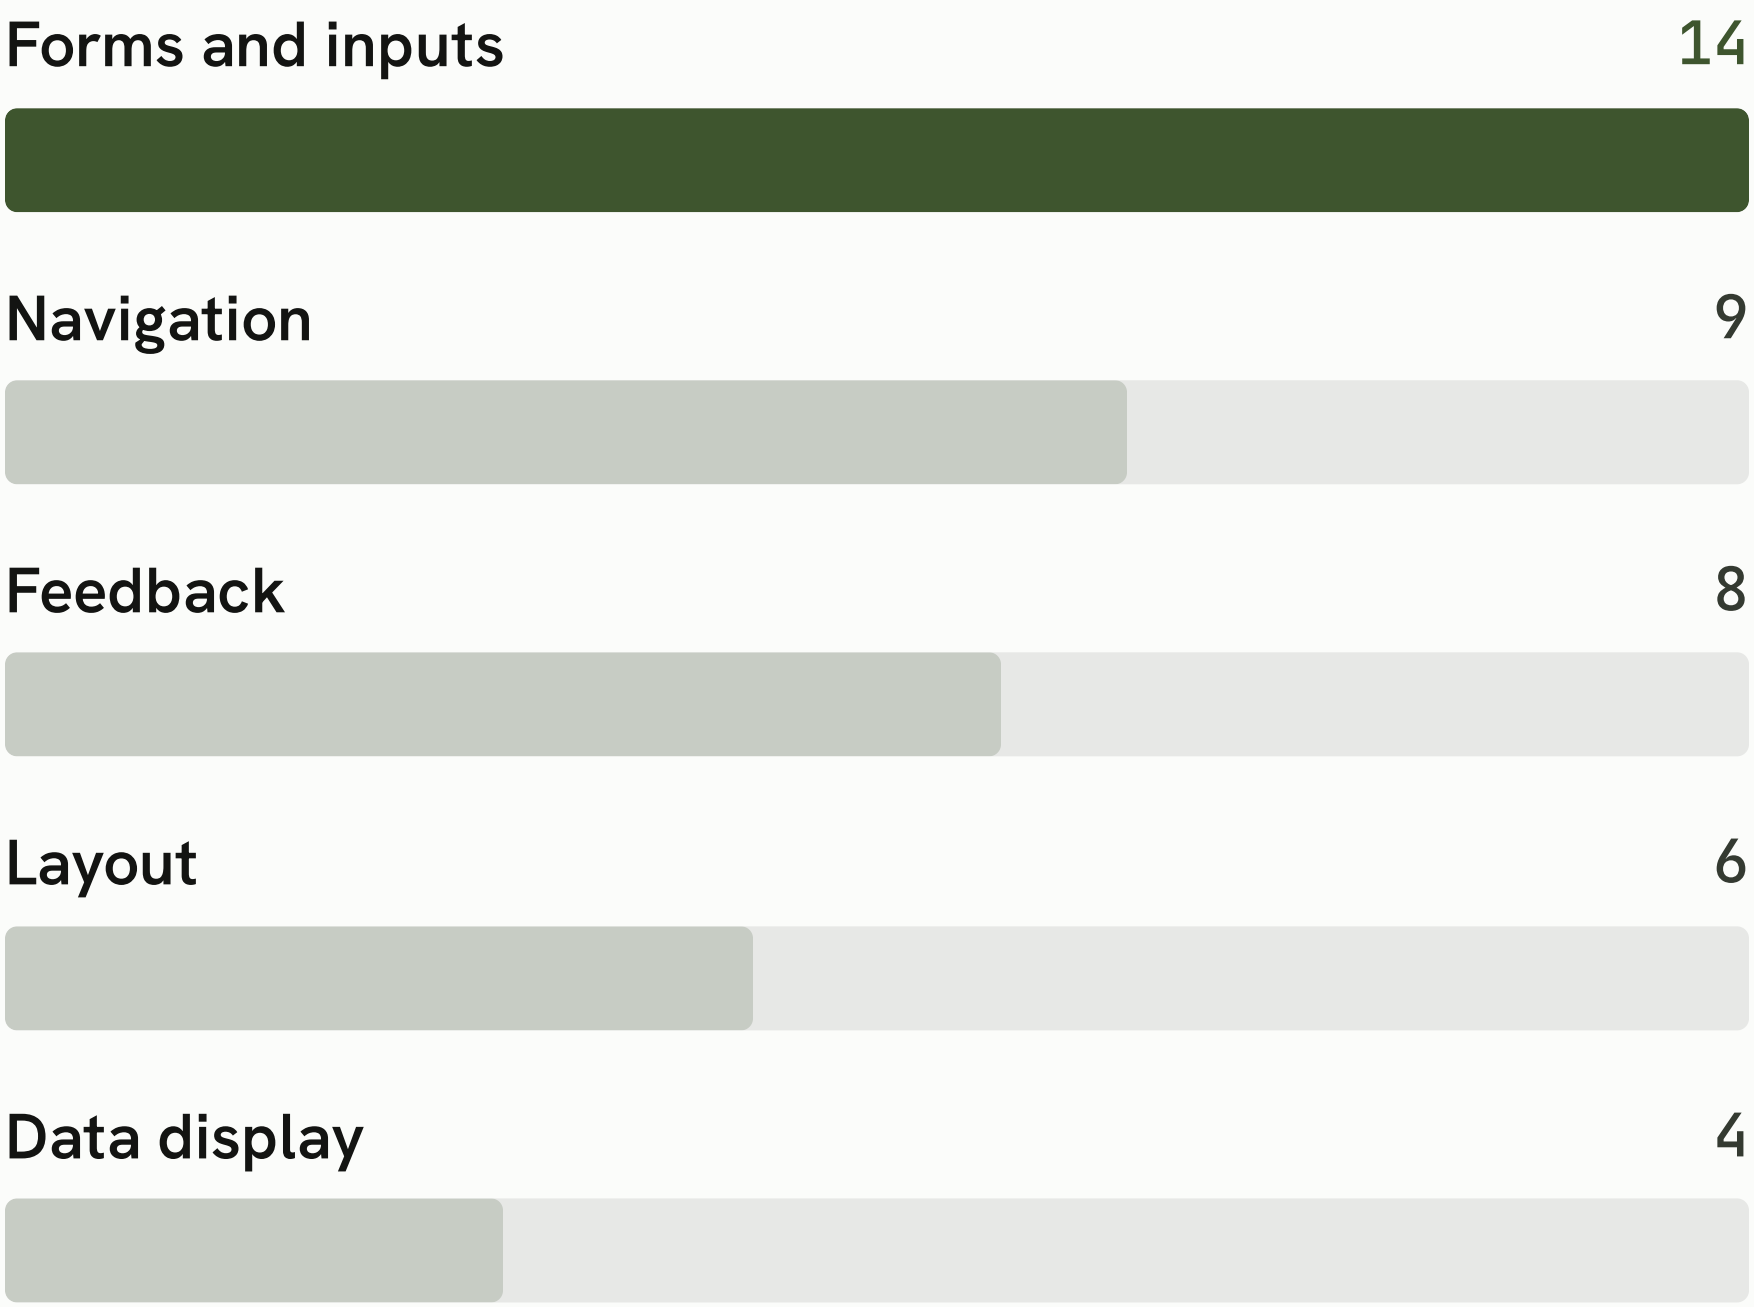

Source: Illustrative numbers, layout example only

Three choices that kept two kits in sync

01 **Tokens as CSS variables**

Web reads them at runtime; native gets a generated TypeScript map.

02 **One component API**

Props match across React and React Native so docs are written once.

03 **A shadcn registry**

Teams copy the source in and own it.

Before and after the repackage

BOOTSTRAP BUNDLE	@HOPLINE/UX4G
jQuery required	Zero dependencies
Global CSS	Scoped tokens
Web only	Web and native

What we would tell a team starting one

> **A design system earns its keep when the second platform costs a fraction of the first.**

Build the token pipeline before the first button.

Building a patient or HCP app?

We design and build apps, AI and design systems with your team.

contact@hopline.co