


Vova Siedykh Assignment 2

ER:

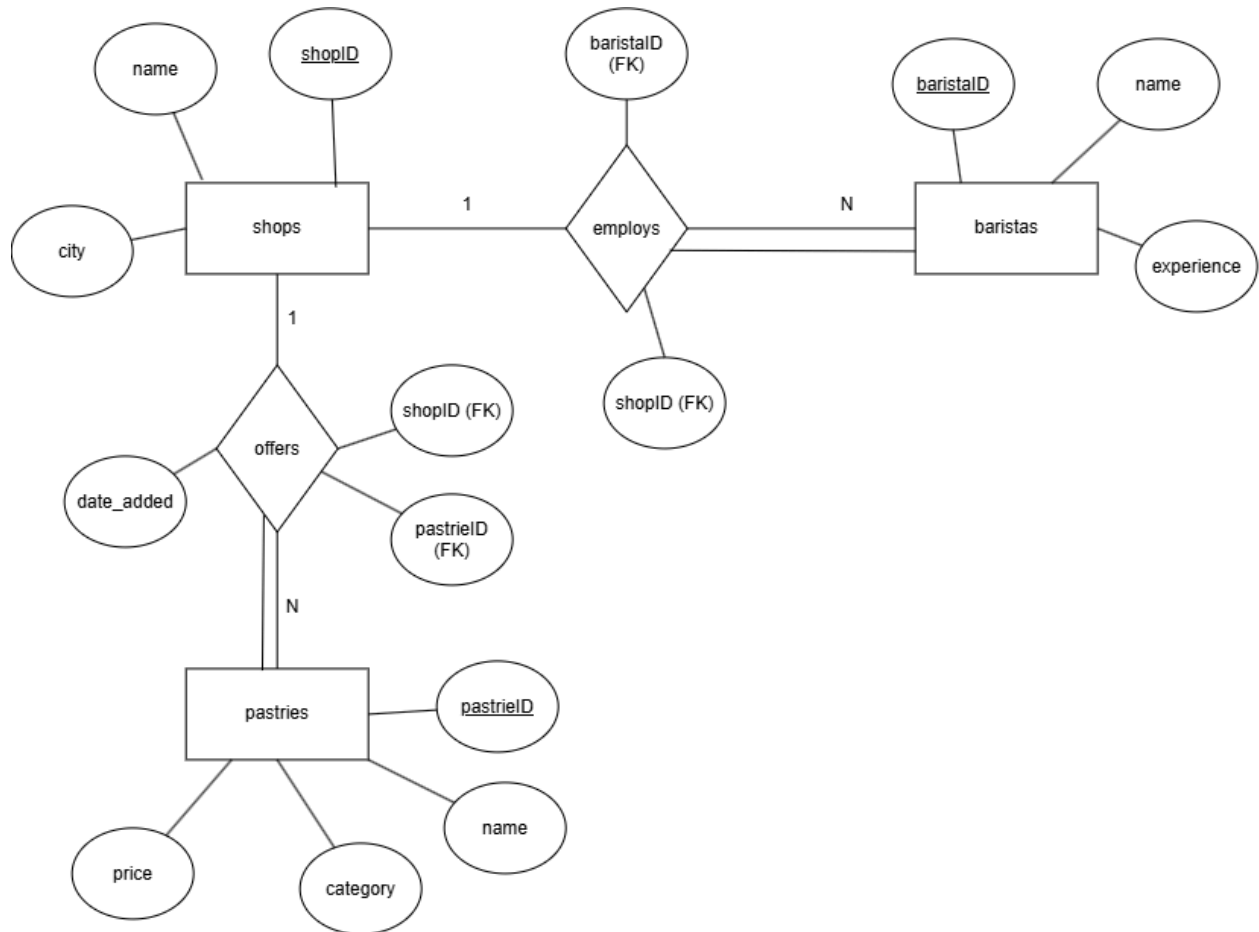

The SQL Part for each problem:

-- 1) Find the average price of pastries for each category from the pastries table.

```
select category, avg(price)
from pastries
group by category;
```

	category	avg(price)
►	Pastry	4.666667
	Muffin	3.625000
	Bakery	4.250000
	Scone	3.850000
	Breakfast	8.000000
	Cake	3.875000

-- 2) Find the total number of baristas at each experience level from the baristas table.

```
select experience_level, count(*)
```

	experience_level	count(*)
►	Junior	2
	Senior	2
	Mid-Level	2

```

from baristas
group by experience_level;

```

-- 3) Count the total number of shops located in each city from the shops table.

```

select city, count(*)
from shops
group by city;

```

	city	count(*)
▶	Seattle	1
	Portland	1
	Austin	1
	Chicago	1
	Denver	1
	Boston	1

-- 4) Find the maximum price among pastries for each category from the pastries table.

```

select category, max(price)
from pastries
group by category;

```

	category	max(price)
▶	Pastry	5.50
	Muffin	3.75
	Bakery	4.25
	Scone	3.85
	Breakfast	8.50
	Cake	4.00

-- 5) Count how many pastries have been added by each shop using the shopID column from the offers table.

```

select shopID, count(pastryID)
from offers
group by shopID;

```

	shopID	count(pastryID)
▶	1	2
	2	2
	3	2
	4	2
	5	2
	6	2

-- 6) Find the name, category, and price of any pastry whose price matches the maximum price within its category.

```

select name, category, price
from pastries p
where p.price =
(
select max(p2.price)
from pastries p2
where p.category = p2.category
);

```

	name	category	price
▶	Almond Croissant	Pastry	5.50
	Blueberry Muffin	Muffin	3.75
	Cinnamon Roll	Bakery	4.25
	Chocolate Scone	Scone	3.85
	Blueberry Scone	Scone	3.85
	Breakfast Burrito	Breakfast	8.50
	Lemon Loaf	Cake	4.00

-- 7) Find the unique shop IDs from the offers table that have offered at least one -- pastry whose price is strictly greater than the overall average price of all pastries.

```

select shopID
from offers o
where o.pastryID in
(
select pastryID

```

	shopID
▶	1
	5
	5

```

from pastries
where price >
(select avg(price) from pastries)
);

```

-- 8) Find the shop ID and pastry ID for the records in the offers table that have the earliest date_added (minimum date).

	shopID	pastryID	date_added
▶	1	1	2026-01-10
•	NULL	NULL	NULL

```

select shopID, pastryID, date_added
from offers
where date_added = (select min(date_added) from offers);

```

-- 9) Find the shop ID(s) that offer the highest number of pastries, utilizing a subquery to evaluate the maximum count per shop.

```

select shopID, count(*)
from offers
group by shopID
having count(*) = (select max(cnt)
from (
select count(*) as cnt
from offers
group by shopID
) as shop_counts
);

```

	shopID	count(*)
▶	1	2
	2	2
	3	2
	4	2
	5	2
	6	2

-- 10) Find the names of baristas who work at shops located in 'Seattle' using nested subqueries.

```

select name
from baristas
where baristaID in
(
select baristaID
from employs
where shopID in
(
select shopID
from shops
where city = 'Seattle'
)
)

```

	name
▶	Emma Watson
	Liam Chen

