Supporting figures and architectural source register

3.6.1. Transition-level evidence and continuity distribution (D01)

The adjacent-boundary set is B={B12,B23,B34,B45}, corresponding to S1→S2, S2→S3, S3→S4 and S4→S5. O5 (other inputs→S5) is retained outside this set. A paper with S5 outputs is not automatically assigned B45: its upstream recovery input must be documented. The existing analysis unit is a unique publication–context pair a=(p,b), not an independent study or a physical material flow. Scenario variants within that pair are not counted again. A future scenario-level extraction would require a new unit and denominator.

The archived continuity codebook assigns one primary status c(a): Q, discussion/review; N, downstream transfer not demonstrated; R, inputs prepared for propagation; S, sensitivity/representation comparison; P, partial or incompletely documented transfer; E, quantified outputs for selected uncertain inputs. These are evidence categories, not an ordinal maturity scale. In particular, E does not establish transport of every upstream uncertainty or dependency. The R code here is distinct from the reported-function R code used for DT features.

D01 is computed as n(b,c)=sum over a of 1[b(a)=b and c(a)=c]. Its margins satisfy N(b)=sum_c n(b,c) and sum_b N(b)=|A|. Ribbon width is proportional to n(b,c); it encodes the distribution of assessments into evidence states, not the magnitude of uncertainty transferred. All four adjacent boundaries remain in the exported table, including zero cells. A zero for B34 means no counted assessment in this selected extraction, not absence of relevant research. Multiple pairs from one publication remain dependent. No downstream continuity is inferred by joining different publications into a synthetic S1–S5 trajectory.

To adjudicate an actual transition, extraction must identify the upstream uncertain variable X, its representation U(X), the documented mapping Y=f(X,theta), and the downstream use of U(Y). For stochastic propagation, samples, joint distributions or an equivalent dependence treatment must be traceable through f; a sensitivity plot alone is not such evidence. Updating is separately recorded when new observations change the inferred state or parameter distribution. The notation describes what is inspected in the papers; this review does not itself simulate material stocks or perform Bayesian updating. An interval on Y without a documented connection to upstream X supports output-UQ evidence but not necessarily end-to-end continuity (Michiels and Geeraerd, 2020; Kapteyn et al., 2021).

3.6.2. Stage–function incidence network (D02)

For each publication p, stage s and function f, x(p,s,f)=1 only when the source coding contains a reported-function state R. C denotes conceptual/proposed/review support and NR denotes no positive recorded feature. R is not independent validation or proof of an operational whole-system twin. The weighted bipartite network has w(s,f)=sum_p x(p,s,f); stage-node counts are the distinct union of supporting publications across functions, and function-node counts are the corresponding union across stages. Repeated tags within a publication–stage–function cell must be collapsed before aggregation.

Only S1–S5 cells enter the network; X-coded adjacent construction, scheduling or cost functions remain outside it. Edge width is proportional to w. In the archived plotting implementation, stage-node area is 220+55N(s) points squared and function-node area is 170+45N(f), so node size is an affine visual encoding, not a strictly proportional area encoding. The network is an incidence map without inter-stage direction. Even if the same paper supports S2 and S3, a transition is counted only after its input–mapping–output connection is separately evidenced. D02 supplies candidate functions for the transition join; it does not substitute for that join.

3.6.6. Verification and limits of the current analytical inputs

The aggregation audit independently reconstructs D01 cells from context records, D02 weights from R-coded cells, D03 exact memberships from mechanism codes and D04 intersections from source/method assignments. It checks unique keys, ID sets, marginal conservation, row denominators and source-file hashes. The current snapshot reproduces 23 contexts from 20 publications, 16 positive stage–function edges, nine exact configurations across ten non-review records, and 46 positive cells in the 100-cell source–method matrix. These are analysis-subset counts, not PRISMA included-study totals.


This arithmetic check does not reread or validate the semantic interpretation of every paper. Some archived extraction anchors refer to earlier coding tables rather than page-specific primary evidence. Such cases require evidence-locator completion and compatibility checks against the current eligibility ledger before submission. The figures are therefore reproducible from the archived coding, but are not certified as a newly completed full-text synthesis. No statistical independence, inter-reviewer agreement or significance test is inferred from successful reproduction.

3.6.7. Recalculation of 20-publication frequencies and conceptual outcome diagrams


Source, method and outcome frequencies use the 20 included S1–S5+U publications: 17 retained archived codings and three newly coded full texts. Positive categories are counted once per paper and divided by 20. Sources can be quantified or explicitly acknowledged; new rows preserve that distinction. Method additions distinguish event-based risk from reported propagation with an unspecified algorithm. Outcome labels are multi-label and refer to documented operations or unresolved inputs, not differences in mean environmental impact. DOI membership equals the selected-set Included list. The 23 contexts are dependent assessments from the same 20 publications. General-DT mechanism frequencies retain their distinct ten-paper denominator.

Supplementary Table S1. Search concept blocks; executed strings are archived separately.


Block	Search concepts and examples
Domain B	building stock*, existing building*, built environment, material cadastre*, resource cadastre*
S1	GeoAI, remote sensing, computer vision, LiDAR, point cloud*, building geometry, building classification
S2	material stock*, material inventor*, material intensit*, material composition, building archetype*, quantity takeoff
S3	material flow*, dynamic stock*, stock turnover, service life, building lifetime*, demolition timing, material outflow*
S4	reuse, recycl*, recover*, deconstruction, urban mining, disassembl*, secondary material*, reverse logistics
S5	life cycle assessment, embodied carbon, environmental impact*, carbon footprint, decision support
DT	"digital twin" OR "digital twins"
U	uncertaint*, probabil*, stochastic*, Bayesian, "Monte Carlo", sensitiv*, variabil*, calibrat*, robust*, prediction/confidence intervals

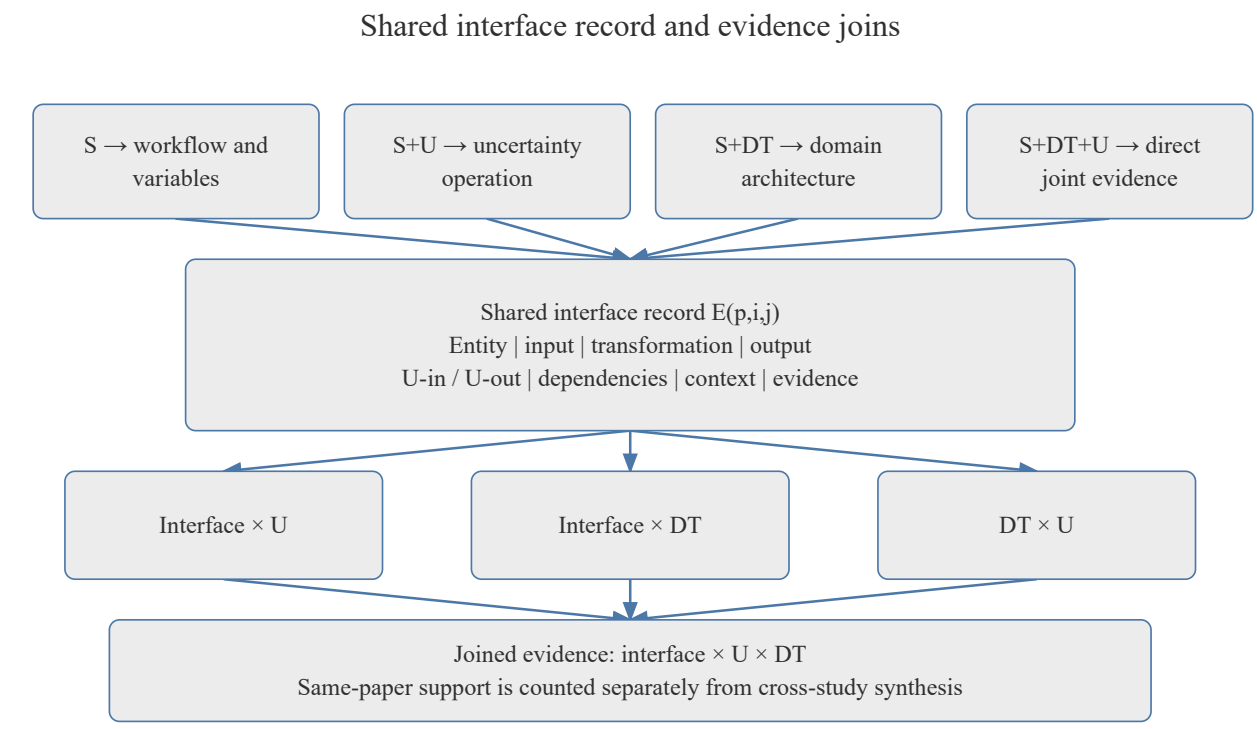

Supplementary Figure S1. Shared interface record and evidence joins.

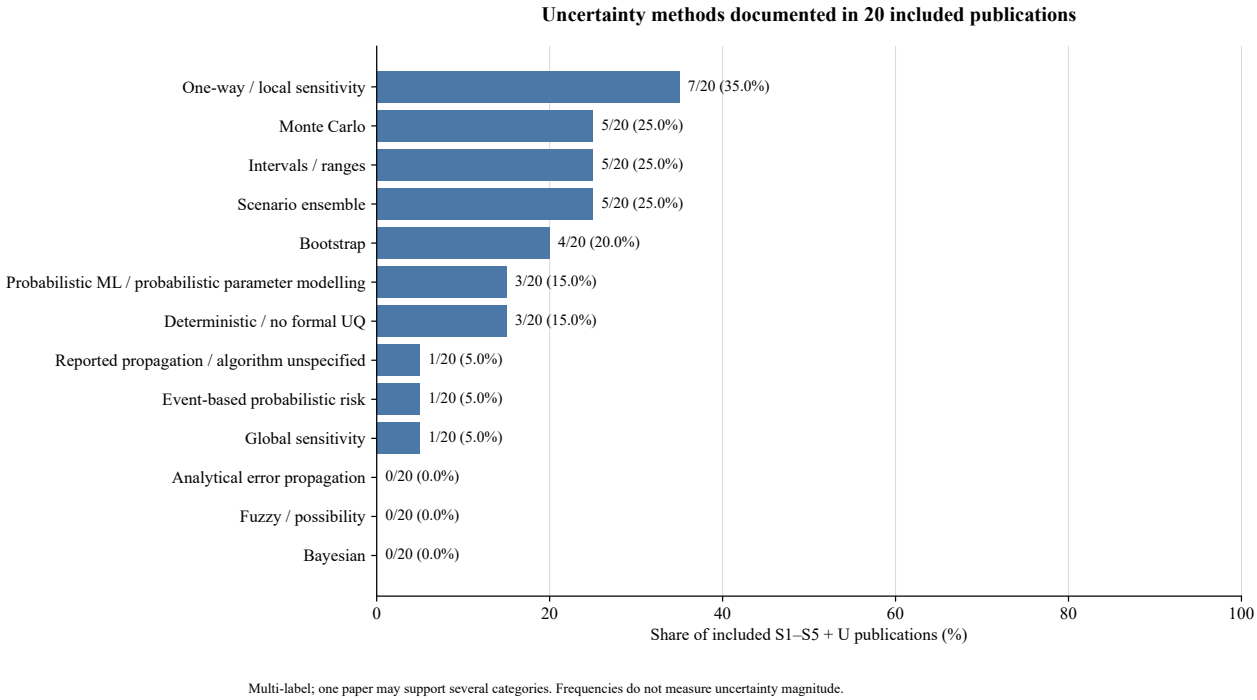


Supplementary Figure S2. Recalculated method frequencies in the same 20 papers; broad legacy codes retain their original scope.

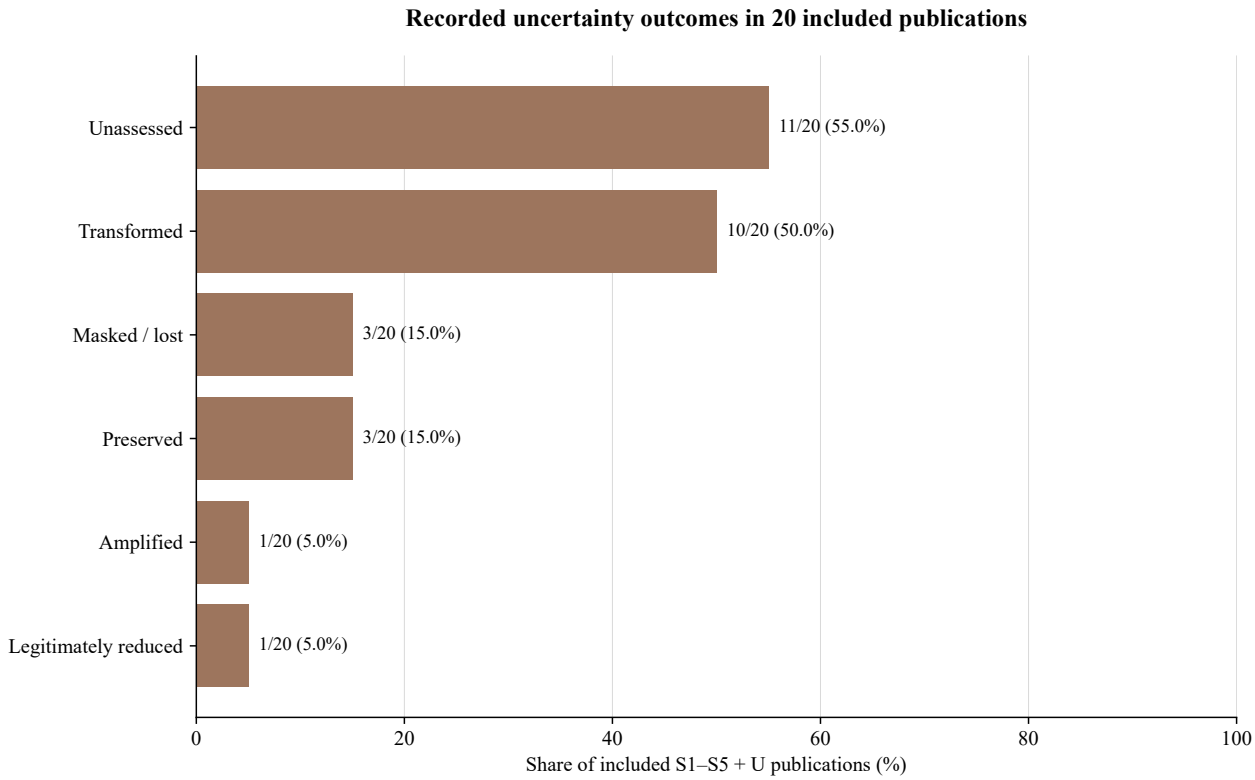


Multi-label; one paper may support several categories. Frequencies do not measure uncertainty magnitude.

Supplementary Figure S3. Legacy outcome labels reconstructed with supporting IDs. These are not measured variance changes.

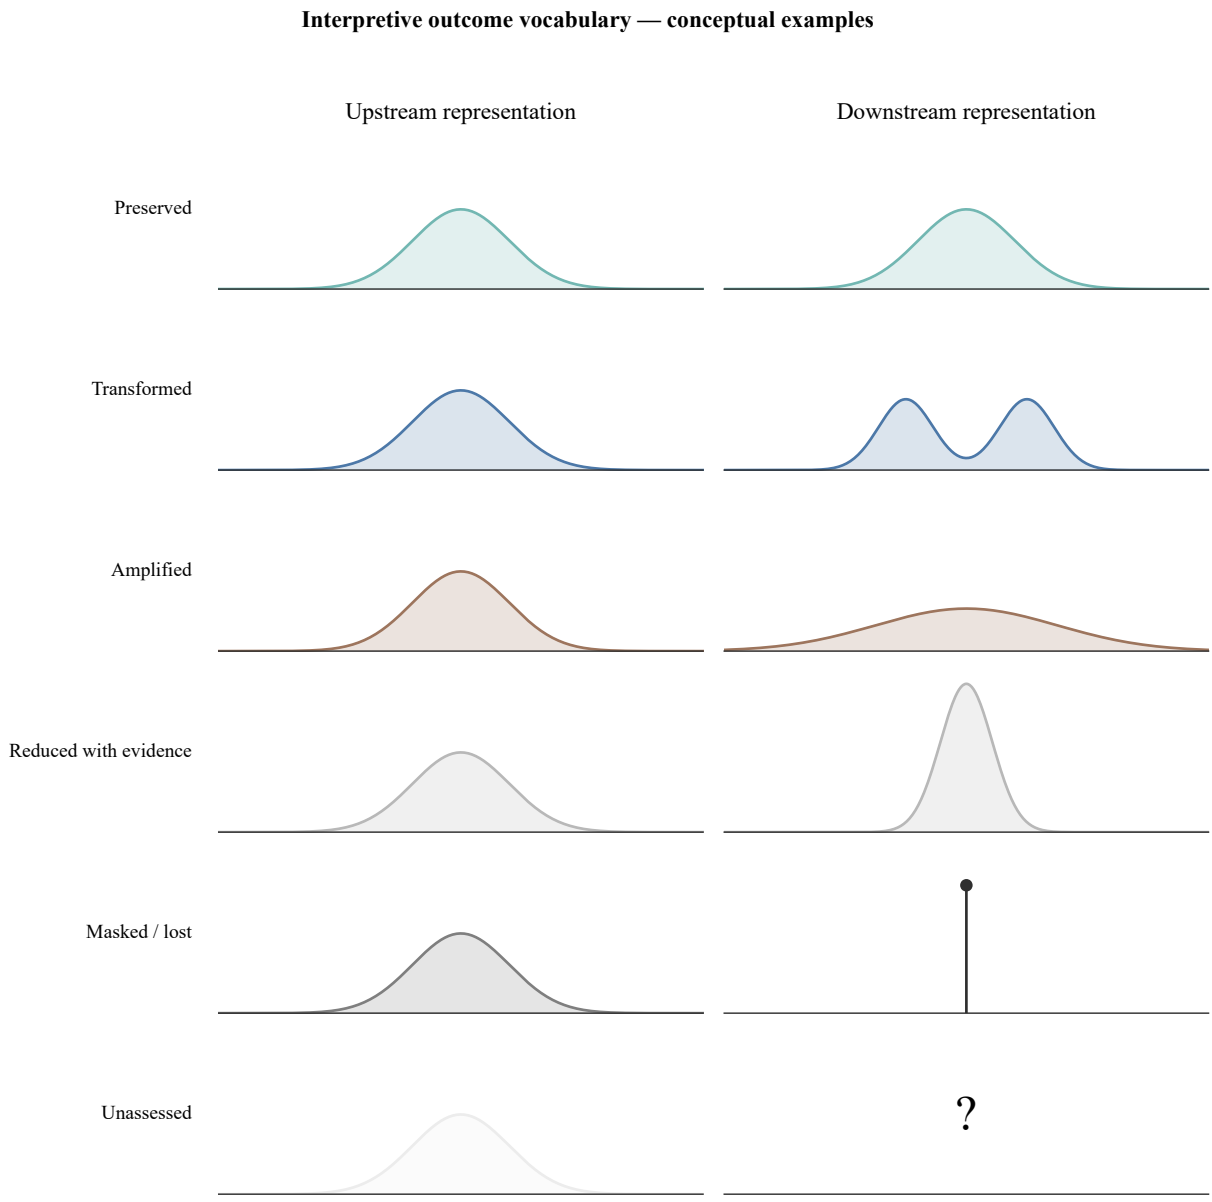


Synthetic normalized curves only. Narrowing requires validation; variance across different units is not directly comparable.


Supplementary Figure S4. Conceptual outcome vocabulary. Synthetic normalized curves; not data from the reviewed models.

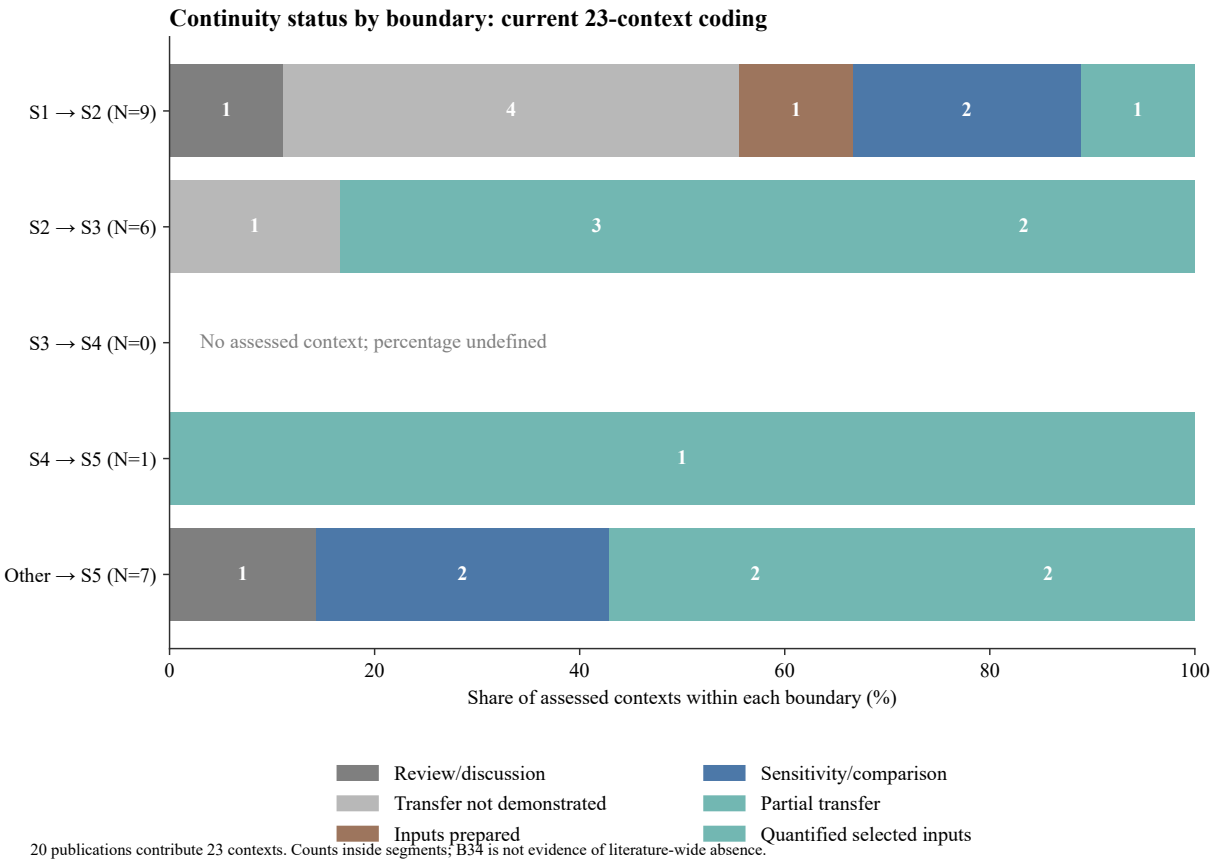


Supplementary Figure S5. Within-boundary percentages and counts. B34 denominator is zero, so its percentage is undefined.

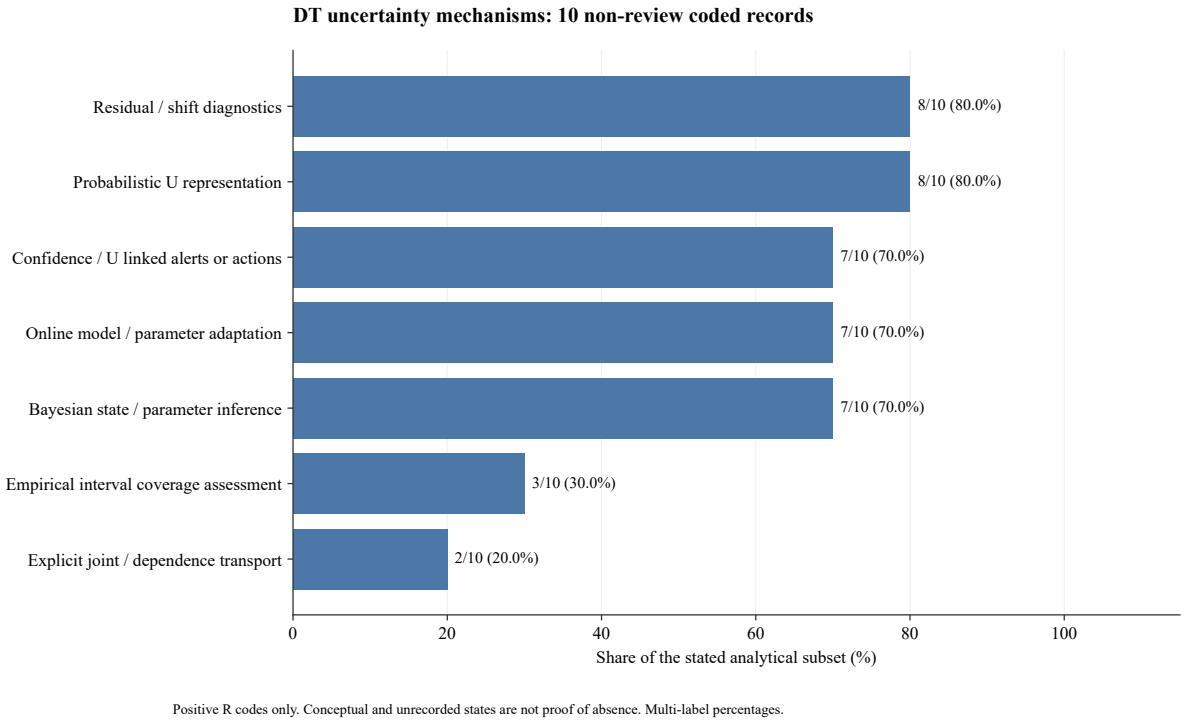

Supplementary Figure S6. Positive mechanism frequency in ten non-review general-DT records.

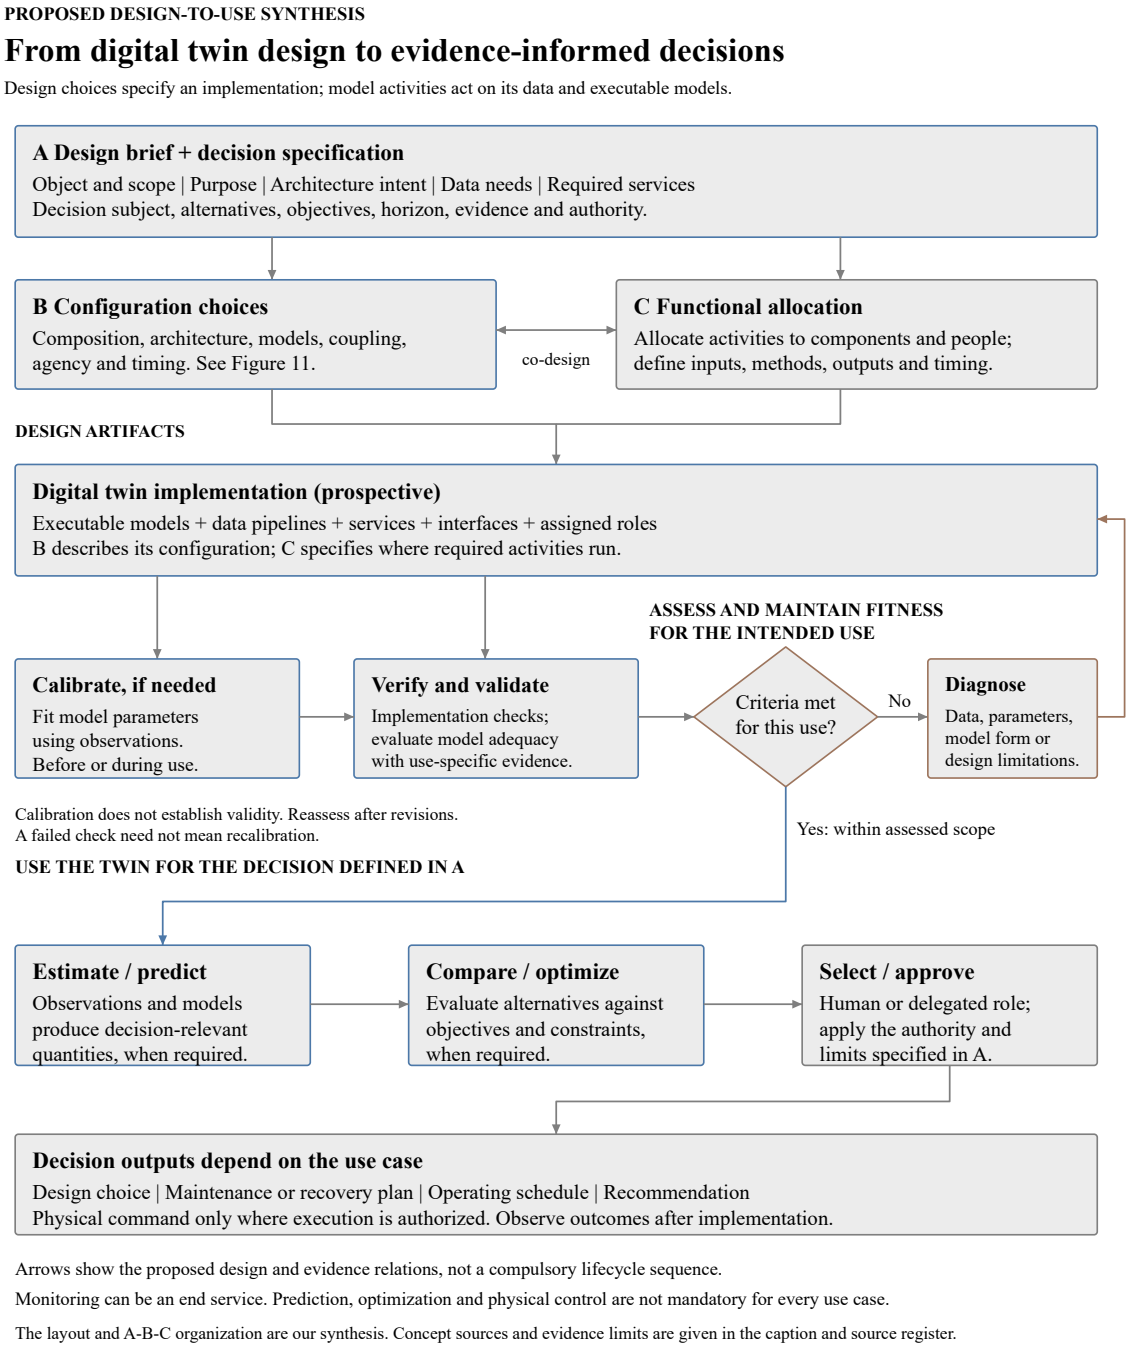

Supplementary Figure S7. Previously developed design-to-use synthesis. Sources are listed in the accompanying register; arrows represent the synthesis. Concept sources: Xiong et al. (2025), Human et al. (2023), Kapteyn et al. (2021), Shao and Helu (2020), Agrawal et al. (2023), Walton et al. (2024), Ogunsakin et al. (2023), Kerin et al. (2023), Chen et al. (2026), Lugaresi et al. (2026), Bitencourt et al. (2025), and van Beek et al. (2023). The arrangement and links are our synthesis.

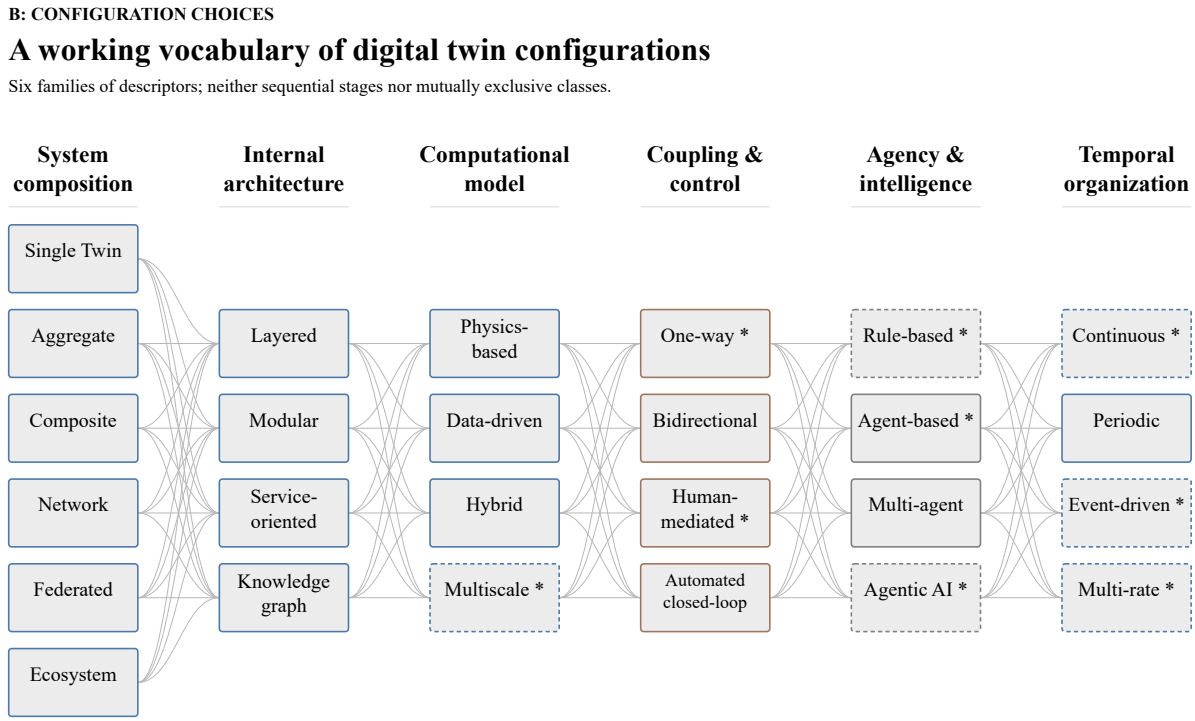

Supplementary Figure S8. Faceted configuration vocabulary, reproduced from Figure 11. Six coexisting design families are connected by candidate pairings; curves do not represent empirical frequency or tested compatibility. Concept sources: Xiong et al. (2025), Human et al. (2023), Kapteyn et al. (2021), Ferrari and Willcox (2024), Shao and Helu (2020), Agrawal et al. (2023), Ogunsakin et al. (2023), Chen et al. (2026), Kritzinger et al. (2018), Kosse et al. (2025), and Gervasi et al. (2026). Sources support individual descriptors; their grouping is our synthesis.

C: FUNCTIONAL ALLOCATION

Allocate activities to a prospective implementation

A specifies the need; B constrains implementation; C allocates the required work. The rows are not stages.

Activity	Consumes	Changes / produces	Allocation and links to B
Calibration	Observations; model; adjustable parameters; fit criterion.	Changes model parameters; produces fitted values and associated uncertainty.	Model-update component. Model basis, data interfaces, update timing and coordination.
Validation	Model version; evaluation evidence; intended use; acceptance criteria.	Assesses adequacy for the use; produces evidence and limits. Does not itself tune results.	Evaluation capability and owner. Models, interfaces and timing; system-level interactions.
Prediction	Model; current state; inputs, scenarios and prediction horizon.	Estimates future or unobserved quantities, with uncertainty where characterized.	Inference / simulation service. Model choice, computation, coordination and delivery timing.
Optimization	Decision variables; objectives; constraints; a way to evaluate options.	Searches decision alternatives; returns candidates or trade-offs. Does not imply physical action.	Optimization service + decision role. Models, architecture, coordination, latency and authority requirements.
Control	Observed / estimated state; reference or objective; control law; allowed actions.	Determines control inputs; when executed, changes the behaviour of the target.	Controller + execution interface. Coupling, feedback, timing, responsibility and limits.

Verification checks implementation and specified requirements; validation addresses fitness for intended use.

Architecture descriptors are not calibrated. Activities operate on models, data or decision variables in an implementation.

Mappings to B are proposed design implications, not a universal allocation matrix. Any family may be affected in context.

The optimization target must be explicit: fitting model parameters differs from choosing a maintenance plan or control input.

Execution may be internal, an external service or a human responsibility. Specify interfaces, triggers, ownership and evidence.


Supplementary Figure S9. Functional allocation. Activities are not equivalent to material-flow stages. Concept sources: Human et al. (2023), Kapteyn et al. (2021), Agrawal et al. (2023), Walton et al. (2024), Ogunsakin et al. (2023), Chen et al. (2026), Lugaresi et al. (2026), and Bitencourt et al. (2025). Functional allocation is our synthesis.

Appendix: architectural source keys

The R register is a conceptual seed bibliography, not a separately completed systematic corpus. Source-specific access limits are retained in inputs/academic-foundations.md.

R1	**Xiong, Guanyu; Li, Haijiang; Gao, Yan. 2025. Cross-domain comparative analysis of digital twins and universalised solutions. Advanced Engineering Informatics. https://doi.org/10.1016/j.aei.2025.103726**
R2	Human, C.; Basson, A. H.; Kruger, K.. 2023. A design framework for a system of digital twins and services. Computers in Industry. https://doi.org/10.1016/j.compind.2022.103796
R3	Kapteyn, Michael G.; Pretorius, Jacob V. R.; Willcox, Karen E.. 2021. A probabilistic graphical model foundation for enabling predictive digital twins at scale. Nature Computational Science. https://doi.org/10.1038/s43588-021-00069-0
R4	Ferrari, Alberto; Willcox, Karen. 2024. Digital twins in mechanical and aerospace engineering. Nature Computational Science. https://doi.org/10.1038/s43588-024-00613-8
R5	Shao, Guodong; Helu, Moneer. 2020. Framework for a Digital Twin in Manufacturing: Scope and Requirements. Manufacturing Letters. https://doi.org/10.1016/j.mfglet.2020.04.004
R6	Agrawal, Ashwin; Thiel, Robert; Jain, Pooja; Singh, Vishal; Fischer, Martin. 2023. Digital Twin: Where do humans fit in?. Automation in Construction. https://doi.org/10.1016/j.autcon.2023.104749

R7	Walton, Ryan B.; Ciarallo, Frank W.; Champagne, Lance E.. 2024. A unified digital twin approach incorporating virtual, physical, and prescriptive analytical components to support adaptive real-time decision-making. Computers & Industrial Engineering. https://doi.org/10.1016/j.cie.2024.110241
R8	Ogunsakin, R.; Mehandjiev, N.; Marin, C. A.. 2023. Towards adaptive digital twins architecture. Computers in Industry. https://doi.org/10.1016/j.compind.2023.103920
R9	Kerin, Mairi; Hartono, Natalia; Pham, D. T.. 2023. Optimising remanufacturing decision-making using the bees algorithm in product digital twins. Scientific Reports. https://doi.org/10.1038/s41598-023-27631-2
R10	Chen, Yi-Ping; Suarez, Derick; Tsai, Ying-Kuan; Karkaria, Vispi; Hu, Guanzhong; Chen, Zihan; Guo, Ping; Cao, Jian; Chen, Wei. 2026. Adaptive digital twin of sheet metal forming via proper orthogonal decomposition-based Koopman operator with model predictive control. Journal of Manufacturing Systems. https://doi.org/10.1016/j.jmsy.2026.04.004
R11	Lugaresi, Giovanni; Dhore, Abdirahman Said; Matta, Andrea. 2026. Joint online validation and parameter calibration within a digital twin framework: an approach based on bootstrap particle filtering. Procedia CIRP. https://doi.org/10.1016/j.procir.2026.03.284
R12	Bitencourt, Julia; Wooley, Ana; Harris, Gregory. 2025. Verification and validation of digital twins: a systematic literature review for manufacturing applications. International Journal of Production Research. https://doi.org/10.1080/00207543.2024.2357741
R13	van Beek, Anton; Karkaria, Vispi Nevile; Chen, Wei. 2023. Digital twins for the designs of systems: a perspective. Structural and Multidisciplinary Optimization. https://doi.org/10.1007/s00158-023-03488-x
R14	Kritzinger, Werner; Karner, Matthias; Traar, Georg; Henjes, Jan; Sihn, Wilfried. 2018. Digital Twin in manufacturing: A categorical literature review and classification. IFAC-PapersOnLine. https://doi.org/10.1016/j.ifacol.2018.08.474
R15	Kosse, Simon; Hagedorn, Philipp; König, Markus. 2025. Semantic Digital Twins in Construction: Developing a modular System Reference Architecture based on Information Containers. Advanced Engineering Informatics. https://doi.org/10.1016/j.aei.2025.103483
R16	Gervasi, M.; Bove, L.; Corallo, A.; Miglietta, M.; Negro, L.; Pellegrino, G.; Ria, F.; Visaggio, C. A.. 2026. Systems of Digital Twins: A Systematic Literature Review and a formal framework. Digital Engineering. https://doi.org/10.1016/j.dte.2026.100100

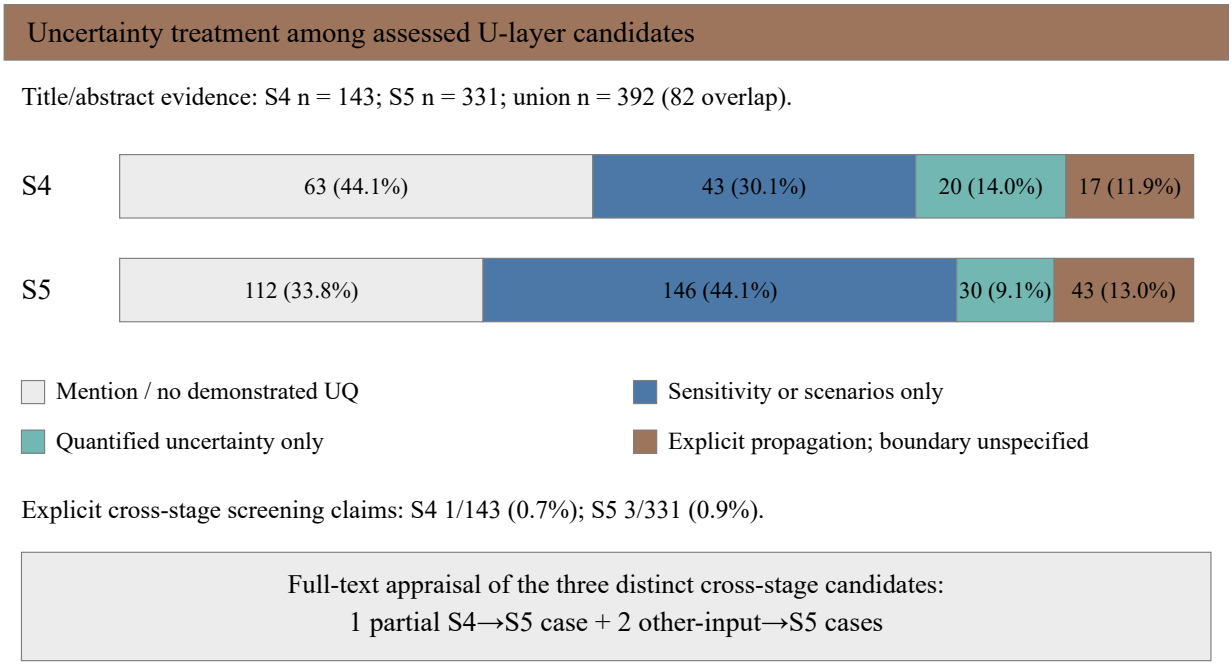

Supplementary Figure S10. Title/abstract mechanism screening of S4–S5 U-layer candidates; 392 distinct records, with overlapping stage membership. This separate screening cohort is not the denominator of Figure 2d full-text percentages.