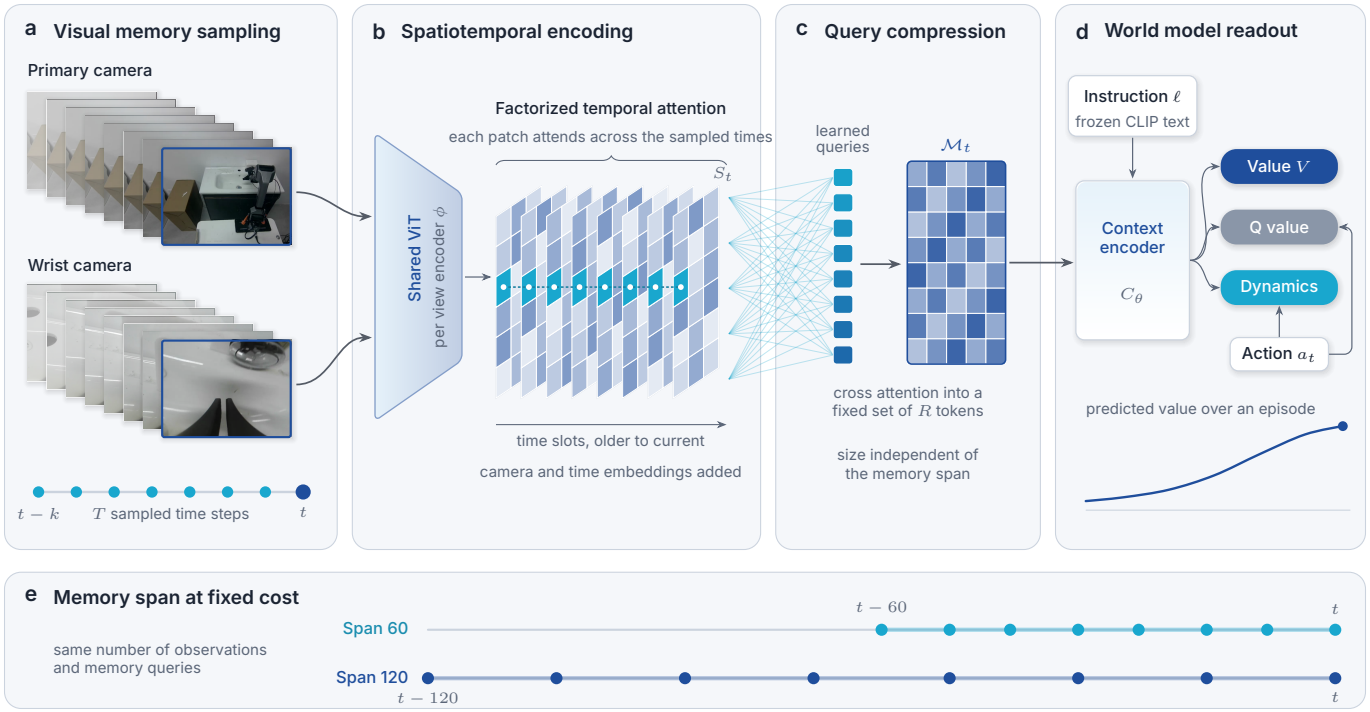

a Visual memory sampling
Primary camera
Wrist camera
$t-k$
T sampled time steps
t
b Spatiotemporal encoding
Shared ViT
per view encoder ϕ
Factorized temporal attention
each patch attends across the sampled times
S_t
time slots, older to current
camera and time embeddings added
c Query compression
learned queries
$\mathcal{M}_t$
cross attention into a fixed set of R tokens
size independent of the memory span
d World model readout
Instruction ℓ
frozen CLIP text
Context encoder
C_θ
Value V
Q value
Dynamics
Action a_t
predicted value over an episode
e Memory span at fixed cost
same number of observations and memory queries
Span 60
$t-60$
t
Span 120
$t-120$
t