



1. Screenshot of command line git transactions

```
PS E:\Develop\Code> git clone https://github.com/HowardGuan24/SE-ucsd.git
Cloning into 'SE-ucsd'...
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (3/3), done.
PS E:\Develop\Code> cd .\SE-ucsd\
PS E:\Develop\Code\SE-ucsd> git checkout -b add-read-me
Switched to a new branch 'add-read-me'
```

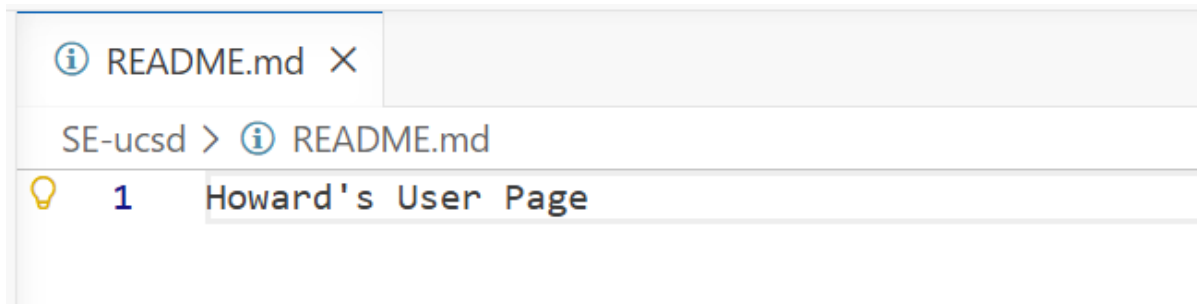

```
PS E:\Develop\Code\SE-ucsd> git add .
PS E:\Develop\Code\SE-ucsd> git commit -m add-read-me
[add-read-me f1334d5] add-read-me
1 file changed, 1 insertion(+), 1 deletion(-)
PS E:\Develop\Code\SE-ucsd> git push --all
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Writing objects: 100% (3/3), 258 bytes | 258.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/HowardGuan24/SE-ucsd.git
ed3e2ef..f1334d5 add-read-me -> add-read-me
```

2. Screenshot of staged commit in VS Code

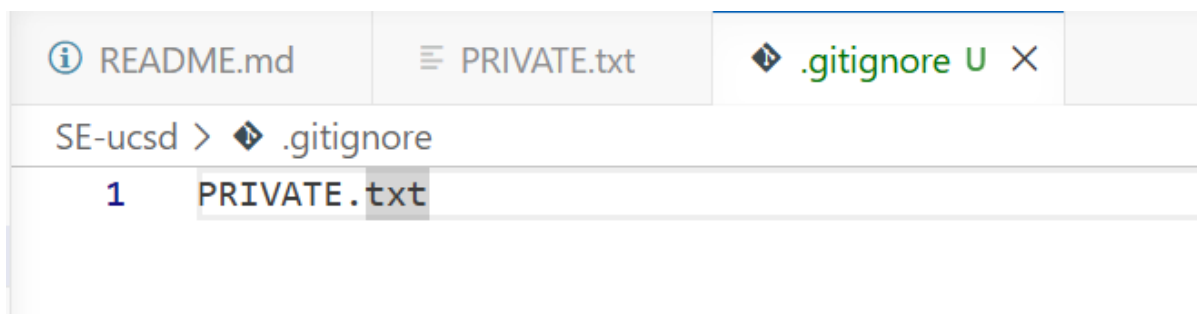



SOURCE CONTROL

REPOSITORIES

Project2048

SE-ucsd

CHANGES

executed VSCode UI

Commit

Staged Changes

.gitignore SE-ucsd

Changes

GRAPH

add-read-me HowardGuan

Update readme file HowardGuan

Initial commit Howard Guan

chessboard2*

new-read-me+

✓

🔒

🔄

...

1

A

0

SE-ucsd

Auto

🎯

📶

📶

🔄

...

new-read-me

origin/main

>>

SE-ucsd

new-read-me+

🔄

⊗ 0

⚠ 0