

TopKPI2 Architecture

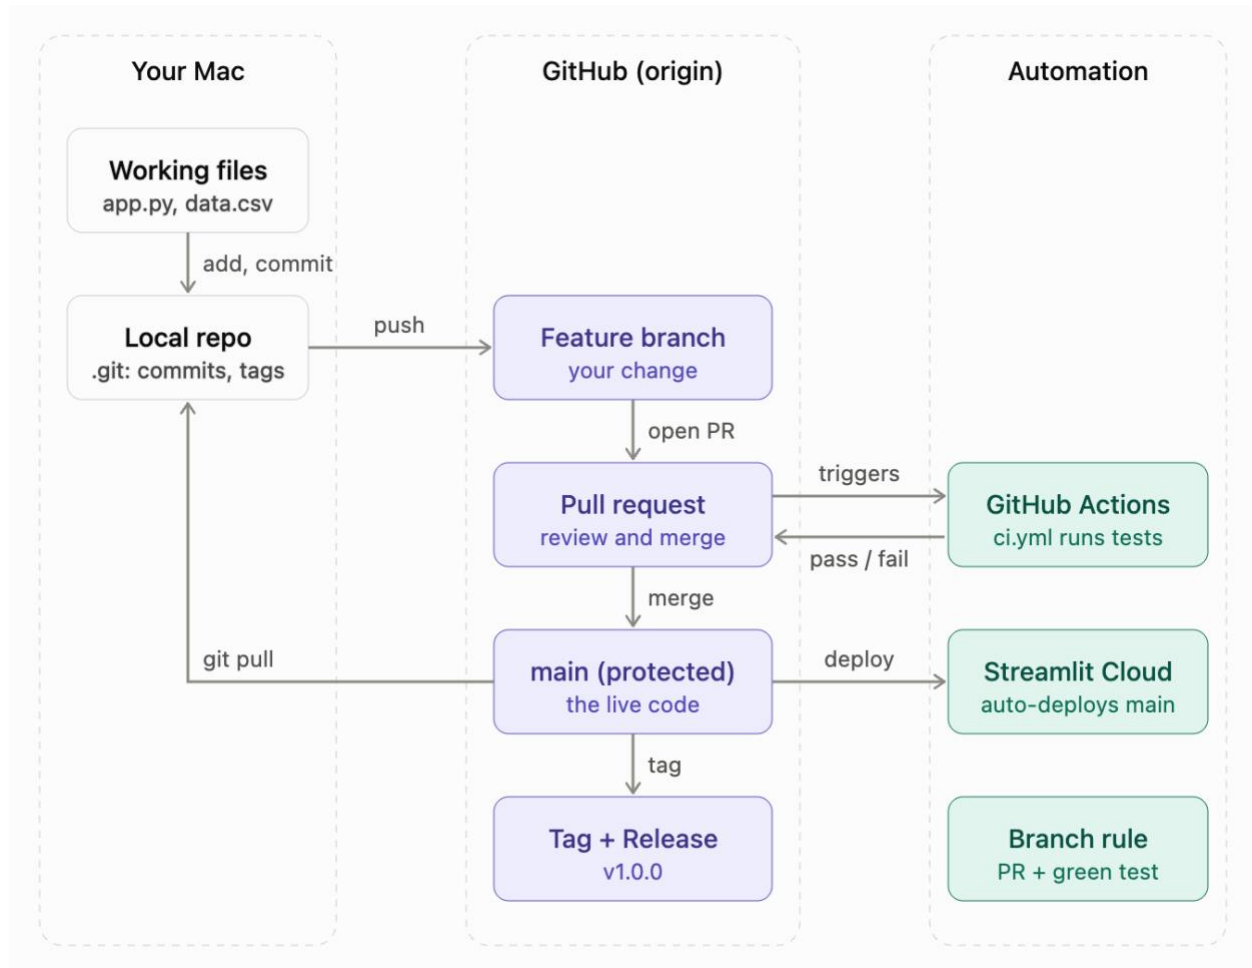


Diagram 1 is the life of one change.

1. You edit **working files** on your Mac.
2. `git add` and `git commit` save a snapshot into the **local repo** (the hidden `.git` folder).
3. `git push` sends it to a **feature branch** on GitHub.
4. You open a **pull request**, which triggers **GitHub Actions**. `ci.yml` compiles `app.py` and runs the smoke test, then reports `pass` or `fail` back to the PR.
5. The **branch rule** only allows the merge once the test is green. The merge lands in **main**, the live code.
6. **Streamlit Cloud** redeploys from main. This is my assumption, because I haven't seen your hosting setup. If you host elsewhere, that box is where it differs.
7. Tags and releases (v1.0.0) mark chosen commits on main.
8. `git pull` brings the new main back to your Mac, which closes the loop.

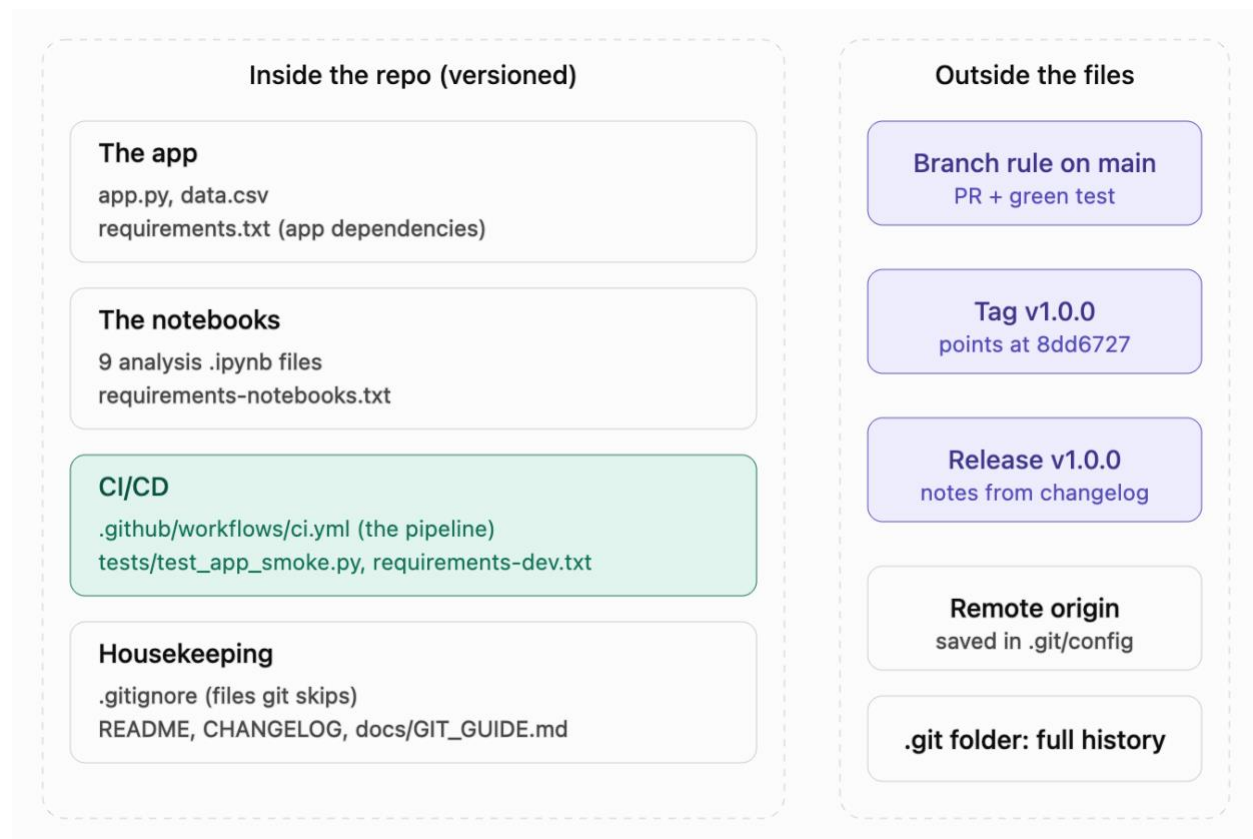


Diagram 2 is where each file and setting lives.

- **Files in the repo** are versioned. That covers the app, the notebooks, the CI/CD files and the housekeeping files (.gitignore, README, changelog, guide).
- **Settings outside the files** are the branch rule, tag and release on GitHub, plus the remote URL and full history inside .git. You change those in GitHub's UI or with git commands, not by editing a project file.

Local versus remote: your Mac and GitHub each hold a full copy of the history. Nothing reaches GitHub until you push, and nothing reaches your Mac until you pull.