
Filtering RMSE across the four state-space models

N = 128 · 50 time steps · resample when ESS < N/2 · whiskers are 95% intervals across 10 observation sequences

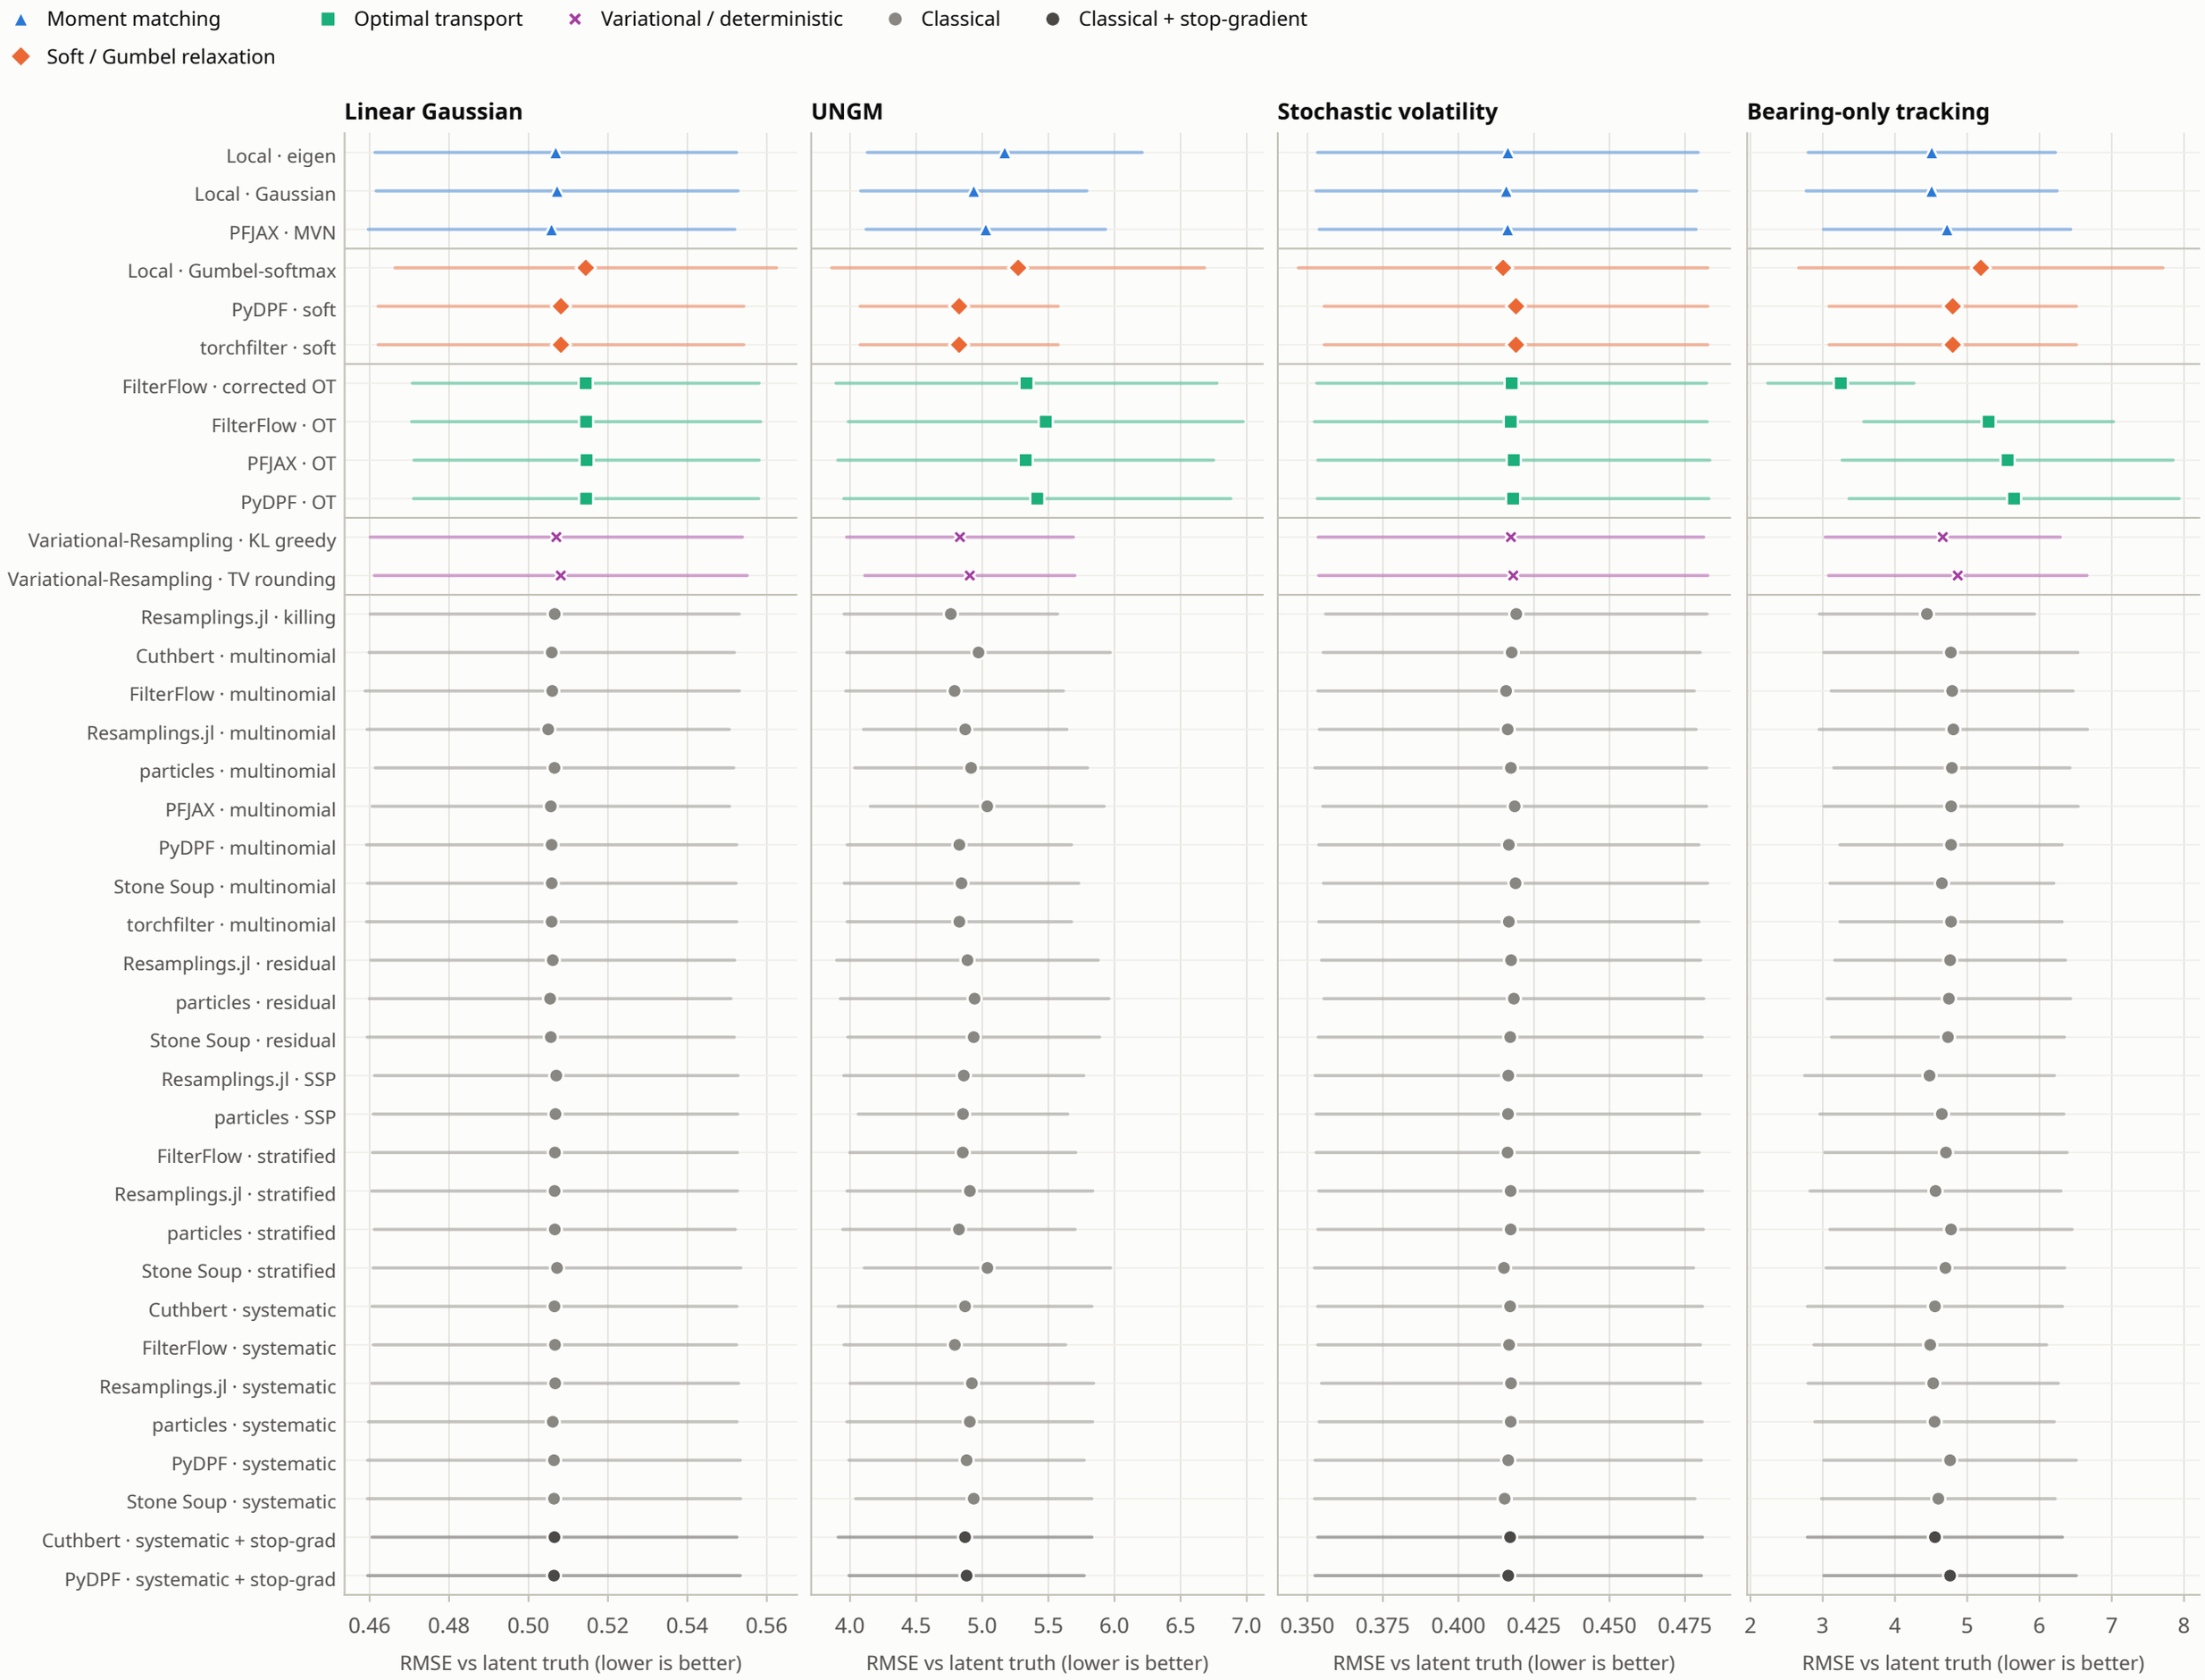

Source: filter_summary.csv. Fast methods: 10 sequences × 10 PF seeds; OT/Gumbel: 10 sequences × 1 seed. Means condition on successful trials (PFJAX MVN on UNGM: 7% numerical failures). Bearing RMSE uses position only.