

MAPWIDGET3 INTEGRATION GUIDE

CONTENTS

Overview	4
Smartphone Layout.....	4
Tablet Layout	8
Desktop Layout.....	11
Widget Integration	13
Upgrading from a Previous Integration of the MapWidget	13
Switching from Flash Maps or Another Map Product.....	14
Integrating the Widget Using the JavaScript Endpoint.....	14
Integrating the Widget Using the HTML Endpoint.....	14
Getting The eventId	15
Example Code	16
Configuration	16
Maps Configuration Management Tool	16
Configuration in Code	17
Customizing Styles	24
User Event Tracking.....	25
Example Code – User Event Tracking	25
Foreign Language Support	26
Currency Symbol Support	27
Inventory Disclaimers.....	27
Support	29
Feedback and Feature Requests	29
Appendix.....	30
Basic Configuration Settings	30
Checkout Configuration	30
Currency Symbol Configuration	30
Dark Theme.....	32

H1 Heading Tag	33
Mobile Header Configuration	34
Large Screen Disclosures Customization	35
Mobile Disclosures Customization	36
Face Value Display.....	38
Custom Google Reseller Certification View	43
All-In Pricing / Fee Display.....	46
Quantity Modal	49
Feedback Feature	50
Checkout Deep Linking	51
Map Color Schemes	55
Section Selection Schemes	59
Small Screen Layout Configuration	60
Scroll to Zoom	63
Zoom Controls.....	64
Map Container.....	65
Legend Display.....	66
Alternate Legend Presentation	67
Large Screen Maps Placement.....	69
CTA Behavior on Mobile.....	70
CTA Behavior on Large Screen	71
Forced Quantity Selection	72
CTA in the Ticket Group Row	73
Featured Inventory Display.....	74
Unmapped Inventory Display.....	75
Quantity Display	77
Price Display	77
Enabling My List.....	78
Pre-Checkout Screen Customization	79
Default Sort	80
Saving Filter Settings.....	81

Local Pickup Filter	81
Packages Marketing	82
Advanced Configuration Settings	87
Checkout Deep Linking	87
No Tickets Handler	87
Special Functions	88
When a Map Is Unavailable	89
Custom Levels.....	90
Customizing Seatics.Text	91
Pre-Filtering Settings	92
Change Table	94


OVERVIEW

The Seatics Mapwidget provides a fully responsive maps solution that serves interactive maps across browsers and devices with a quick and simple integration.

A stacked layout (map on top, ticket list below) displays when the screen is less than 992px wide and the ratio of width to height is 13:9 or below. A side by side 'mobile landscape' layout displays when the screen is less than 992px wide and the ratio of width to height is greater than 13:9. A side by side 'desktop' layout displays when the screen is greater than 992px wide.

The widget UI includes the event info bar, the map region, filtering and sorting controls, and the ticket group list. Major UI elements are identified in the screenshots below.

SMARTPHONE LAYOUT

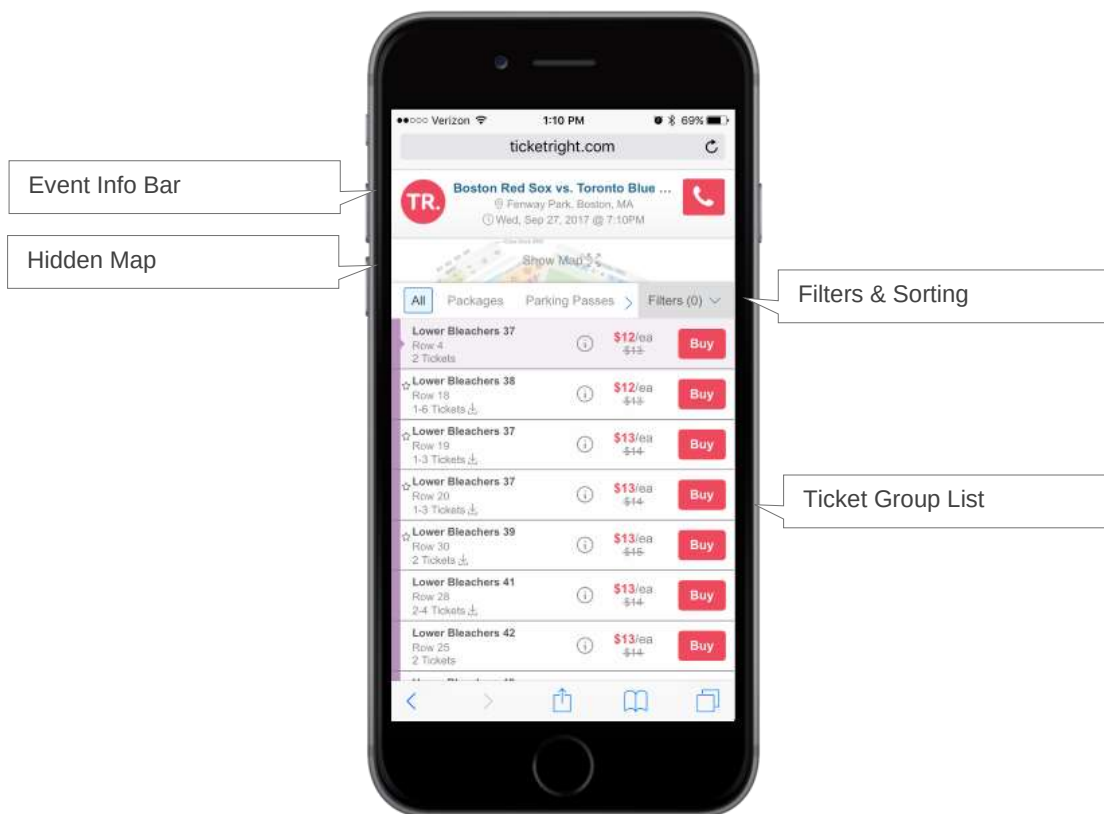


Main Screen

Additional Screenshots:




Main Screen with Map Expanded

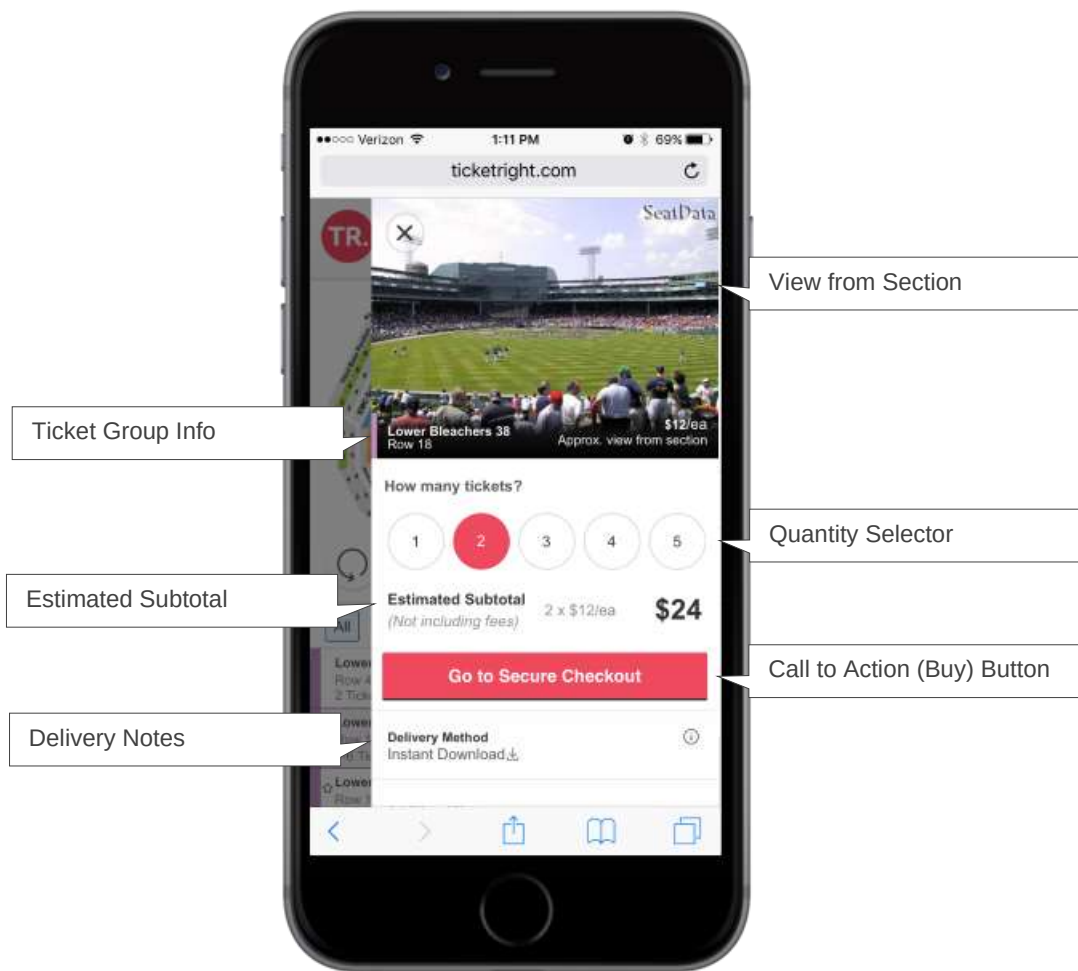

Ticket Details / Precheckout Screen



Main Screen in Landscape Orientation

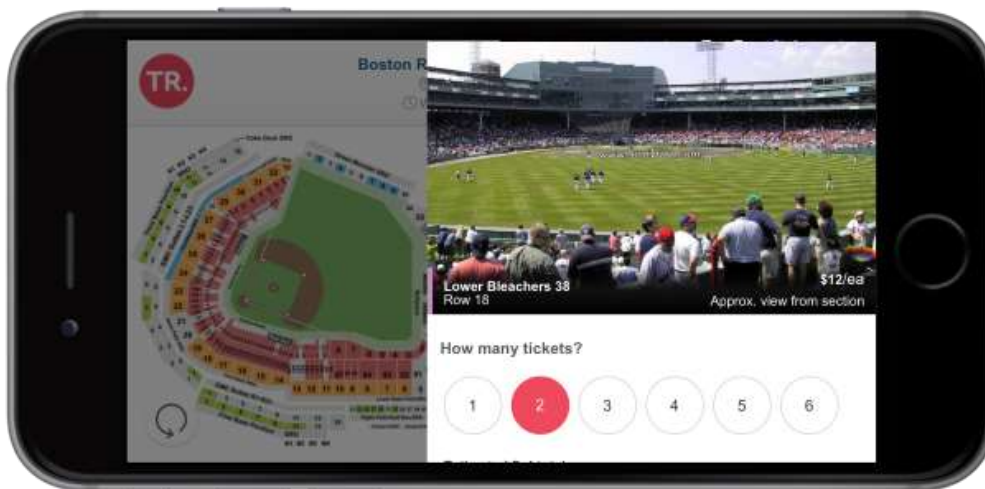


Ticket Details / Precheckout Screen in Landscape Orientation


TABLET LAYOUT

Event Info Bar


Hidden Map

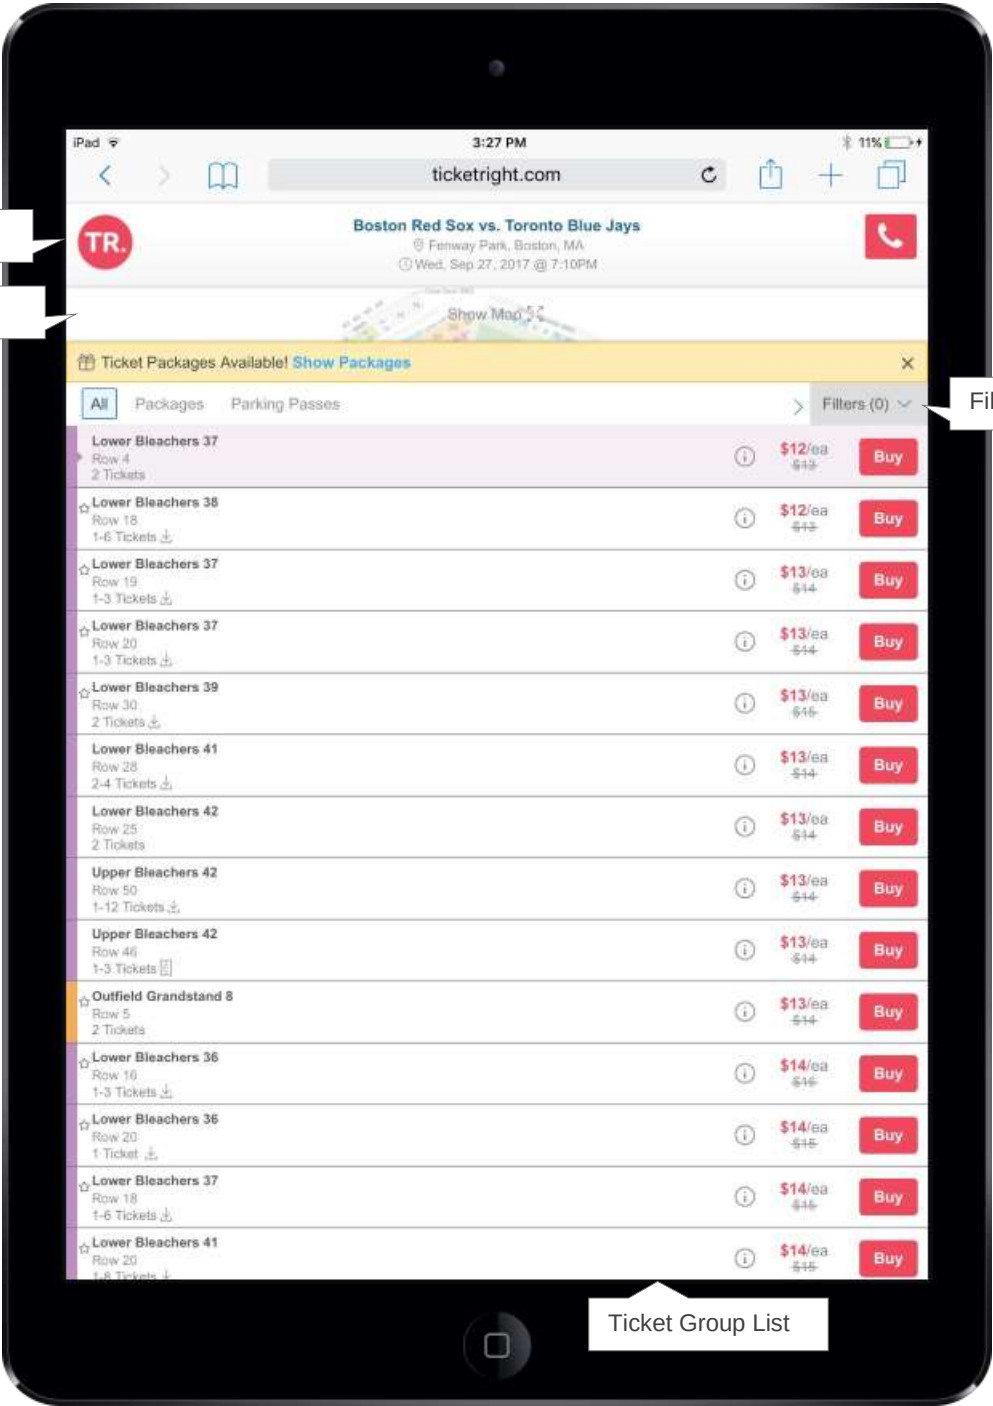

Main Screen

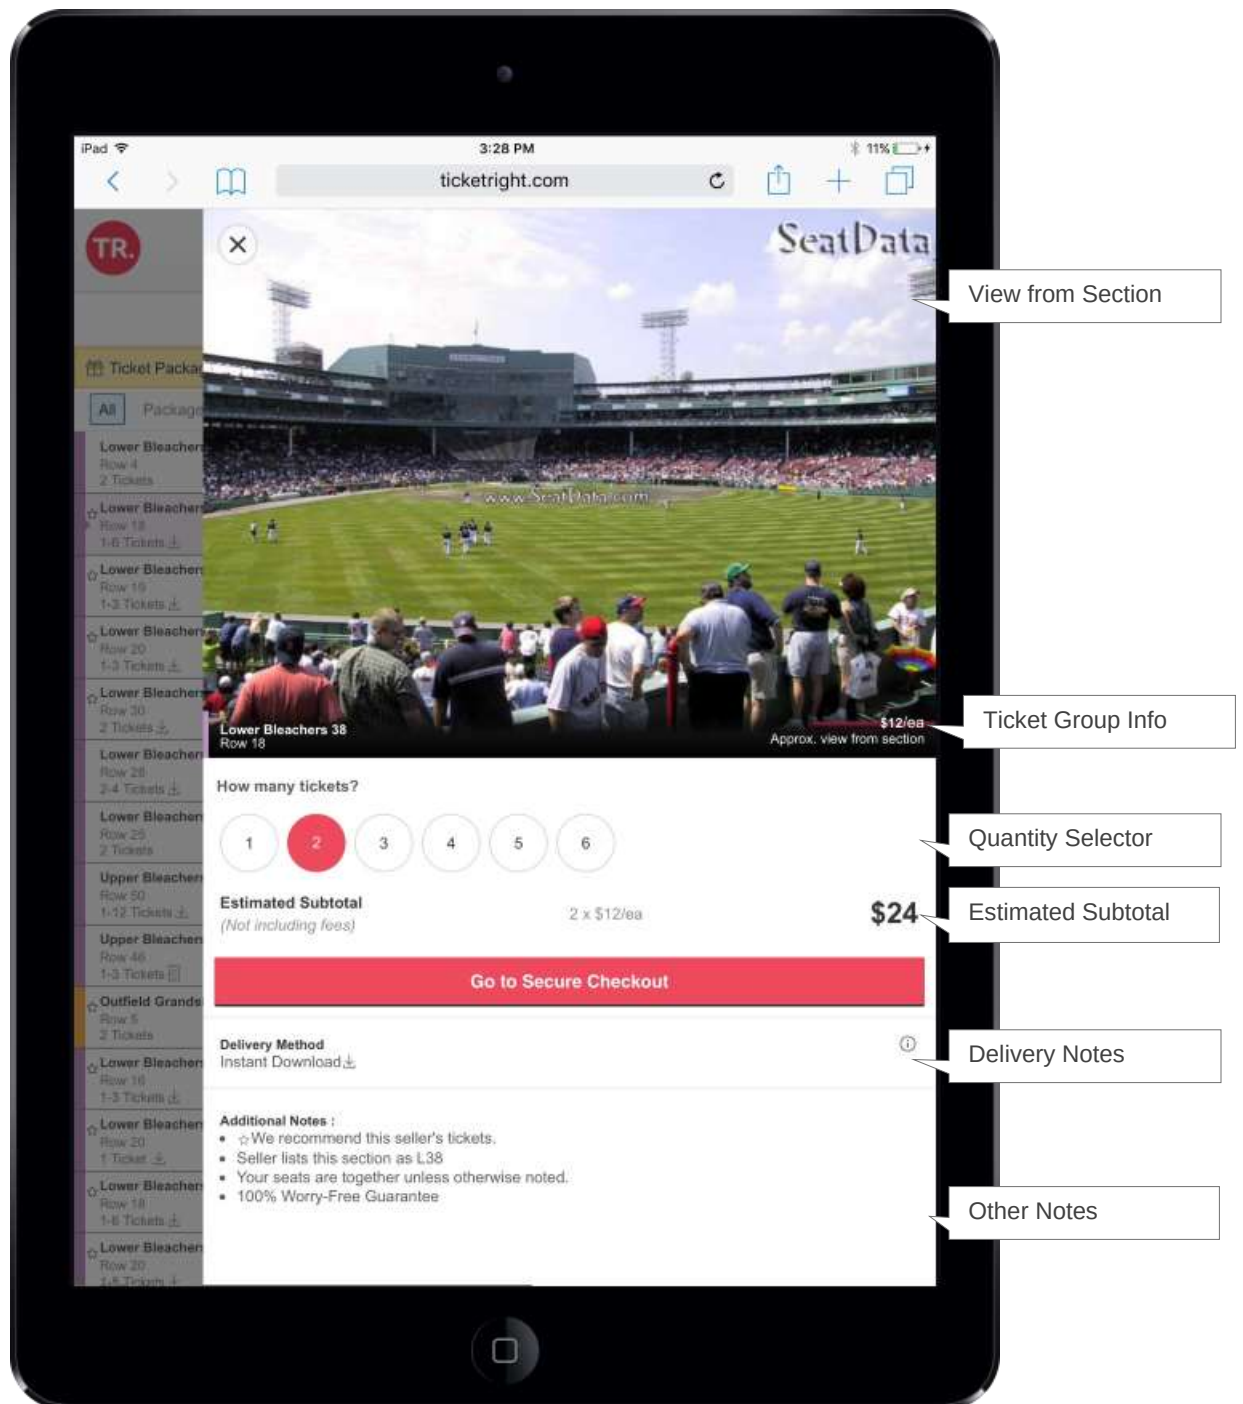


Ticket Details / Precheckout Screen

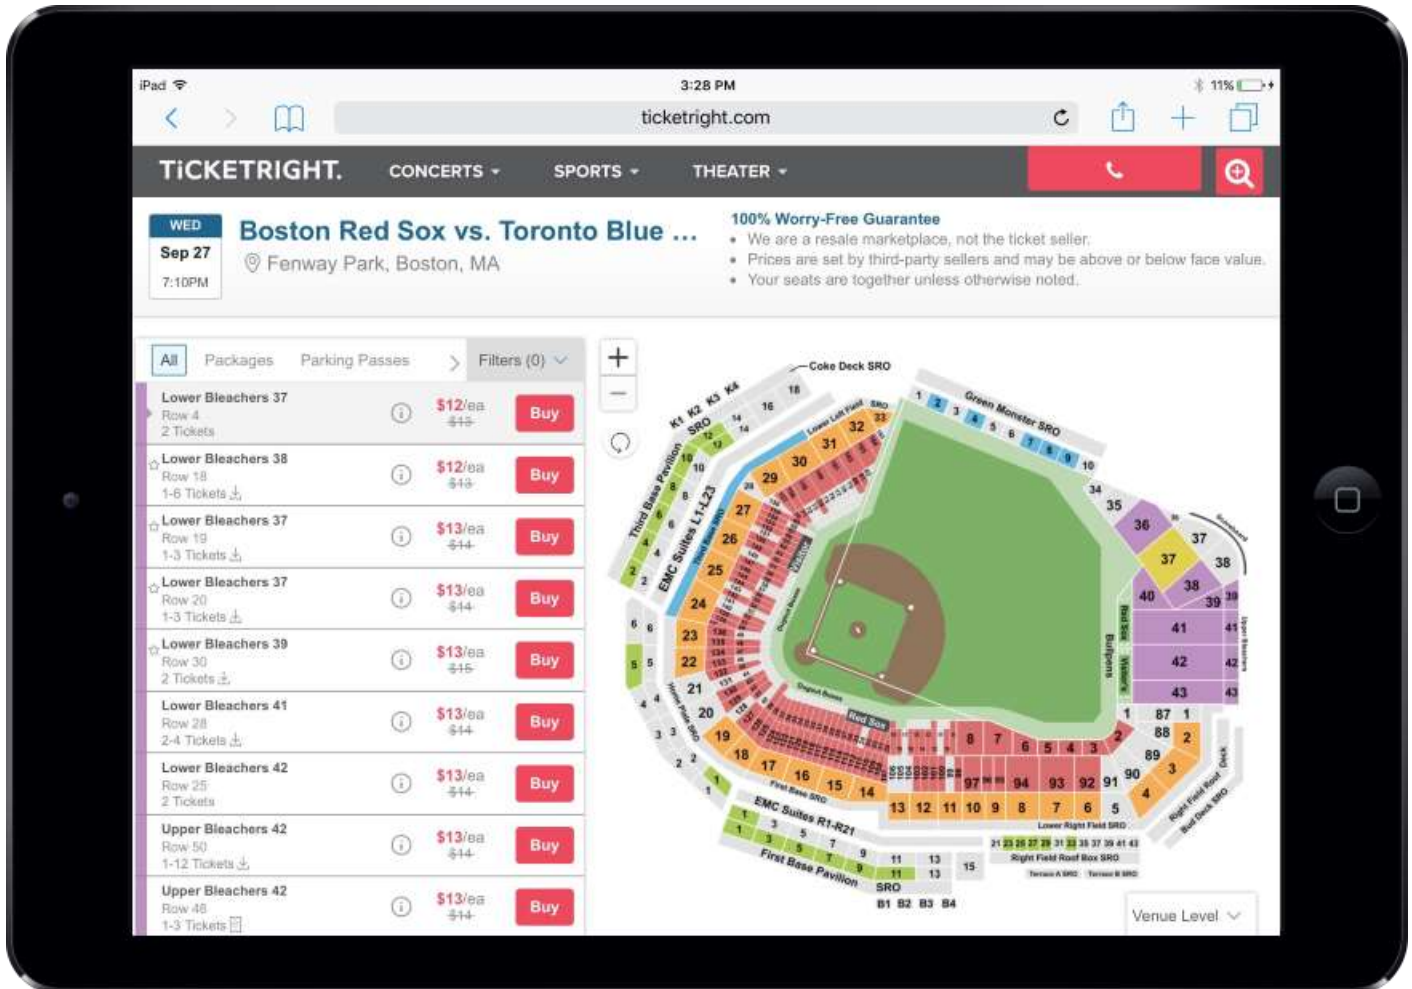


Main Screen in Landscape Orientation

DESKTOP LAYOUT

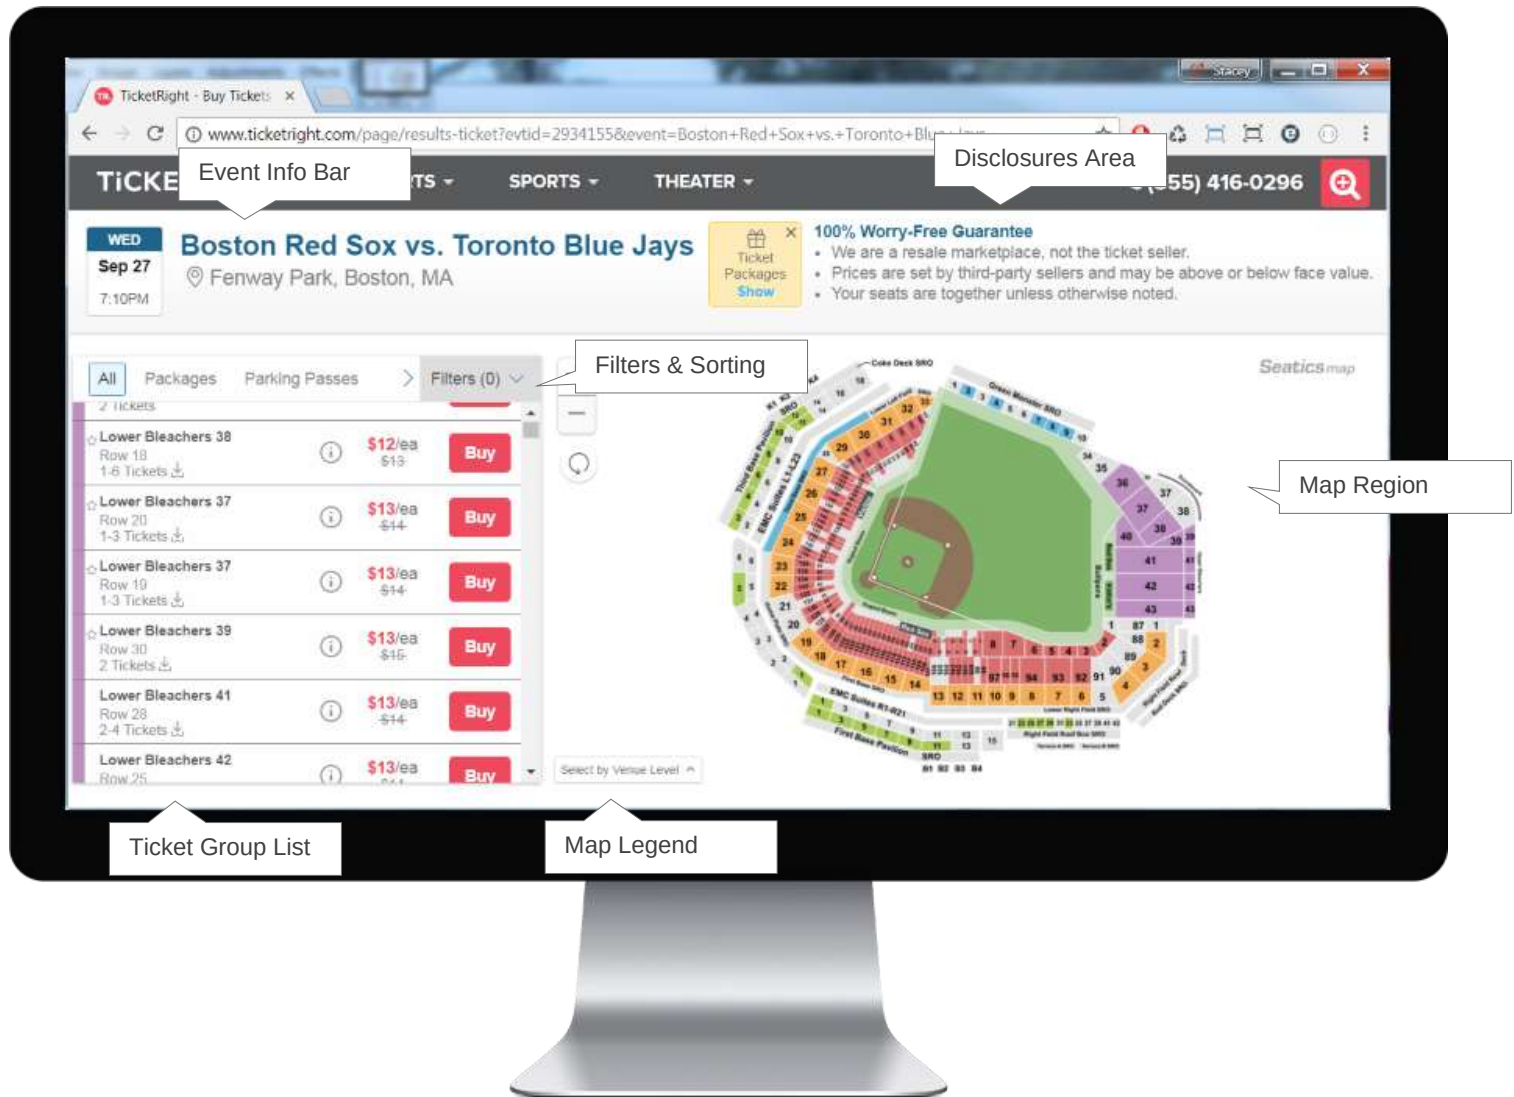

Main Screen

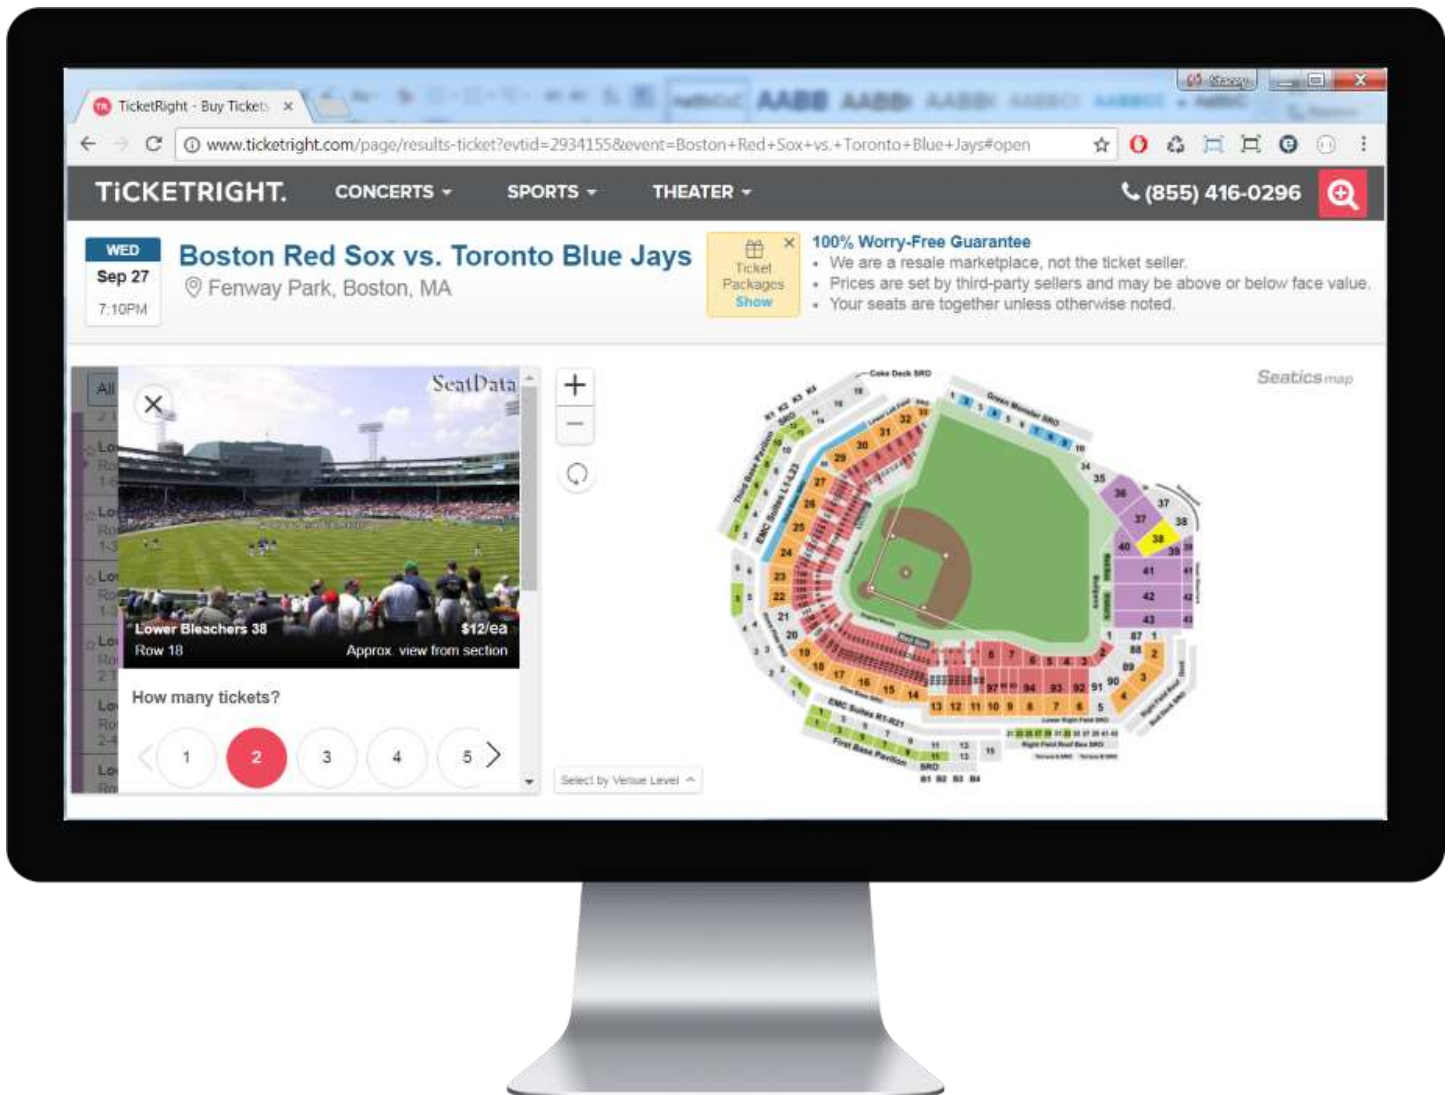

Ticket Details / Precheckout Screen

WIDGET INTEGRATION

The Seatics Mapwidget can be accessed using either the JavaScript endpoint or the HTML endpoint. The integrations are very similar.

The widget expects to be placed in a container. You must set the width and the height of this container. The widget will fill up to 1500px of width. The recommended height of the container is 900px. It can be set smaller or larger than 900px, if desired.

This product is meant to be a single integration solution that adapts to the user's screen size and displays a layout optimized for their device. To use the responsive maps with a responsive site, you will need to add CSS to hide the full site header and footer when the layout goes from desktop to mobile. The small screen layout is intended to fill the entire browser window. Adding other elements to the mobile page may throw off the layout calculations and cause the UI to render incorrectly.

The desktop layout is served when the browser window is wider than 991 pixels. Below is an example CSS declaration that could be used to trigger the hiding of your site's header and footer when the browser window is narrower than 992 pixels:

```
@media screen and (max-width: 991px) {  
  
    /* Hide your header and footer here */  
  
}
```

UPGRADING FROM A PREVIOUS INTEGRATION OF THE MAPWIDGET

If your site is integrated with version 1 or 2 of the Seatics Mapwidget (you point to a `mapwidget.seatics.com` or `mapwidget2.seatics.com` URL), to use the latest version of maps you will need to take the following steps:

1. **Point to the mapwidget3 endpoint.** See instructions below for the new URL.
2. **Update your custom stylesheet.** Because the UI is dramatically different from previous versions of maps, your existing styles may not work as expected and you may want to add new styles. If you're using the widget for all screen sizes, you'll need to add CSS to hide the full site header and footer when the layout switches from desktop to mobile.
3. **Update your configuration, if needed.** Most of the configuration settings in the previous versions of maps are supported in the new version. The exception is `Seatics.config.logoHtml` from version 1. When upgrading to version 3, you'll have access to new configuration settings you may want to use as well. See the Configuration section of this guide for all available options.

SWITCHING FROM FLASH MAPS OR ANOTHER MAP PRODUCT

If your site is integrated with TicketNetwork's Flash maps or another maps product (e.g. Ticket Utils maps), you will need to take the following steps:

1. **Remove old maps code.** The Seatics Mapwidget can be used to replace the previous solution on your mobile site, desktop site, or responsive site.
2. **Point to the mapwidget3 endpoint.** See below for instructions.
3. **Configure your implementation of maps.** At the very least, you'll want to make sure the site is directing users to the correct checkout. This guide describes and illustrates the many configuration options available to customize the Mapwidget.
4. **Create a custom stylesheet, if needed.** The Mapwidget styles are basic and generic with the expectation that site owners will customize the widget to match the site's brand standards. Make sure to add a new stylesheet instead of directly editing the Mapwidget stylesheet.

INTEGRATING THE WIDGET USING THE JAVASCRIPT ENDPOINT

To access the widget using client-side JavaScript, add a script tag to the web page with the following URL format as the source:

Sandbox:

<https://mapwidget3-sandbox.seatics.com/js?eventId=203518&websiteConfigId=690>

Production:

<https://mapwidget3.seatics.com/js?eventId=203518&websiteConfigId=690>

Replace the highlighted parameters above with information specific to the site and event (see below table). The result should be placed in the middle of the ticket results page.

INTEGRATING THE WIDGET USING THE HTML ENDPOINT

To access the widget, use a server-side request to this page:

Sandbox:

<https://mapwidget3.seatics.com/html?eventId=203518&websiteConfigId=690&userAgent=something>

Production:

<https://mapwidget3-sandbox.seatics.com/html?eventId=203518&websiteConfigId=690&userAgent=something>

Replace the highlighted parameters above with information specific to the site and event (see below table). The result should be placed in the middle of the ticket results page.

Parameter	Required?	Definition	Default	Notes
eventId	Required	The ID of the event to load tickets for		
websiteConfigId	Required	The web config ID you want to see results for		
userAgent	Required for /html only	The user agent of the user on the tickets page		
includeBootstrap	Optional	Loads the default Bootstrap 3.4.1 JavaScript library	true	Can set to false if page already uses Bootstrap. http://mapwidget3.seatics.com/mobile/html?eventId=203518&websiteConfigId=690&userAgent=something&includeBootstrap=false
includejQuery	Optional	Loads the jQuery 3.6.0 library	true	Minimum version supported: 3.4.1 Can set to false if page already uses jQuery. http://mapwidget3.seatics.com/mobile/html?eventId=203518&websiteConfigId=690&userAgent=something&includejQuery=false
				Minimum version supported: 3.6.0



Please note: If your site already uses Bootstrap or jQuery, it is recommended that you set those parameters to false to prevent conflicts between multiple versions of the same libraries.

GETTING THE EVENTID

In order for the Mapwidget to know what map and ticket groups to load, the widget must be passed the eventId, as explained above. Adding the following example code before the widget block will allow the site to grab the eventId from the URL and turn it into the variable 'evtid,' which can then be plugged into the script to call to the widget:


EXAMPLE CODE

```
<script>
function getUrlParameter(sParam) {
    var sPageURL = window.location.search.substring(1);
    var sURLVariables = sPageURL.split('&');
    for (var i = 0; i < sURLVariables.length; i++) {
        var sParameterName = sURLVariables[i].split('=');
        if (sParameterName[0] == sParam) {
            return sParameterName[1];
        }
    }
}
var evtid = getUrlParameter('evtid');
</script>
```

CONFIGURATION

MAPS CONFIGURATION MANAGEMENT TOOL

Starting in August 2018, the Maps Configuration Management Tool will be available through TicketNetwork Portal. Maps Configuration Management is an app that provides site owners with a UI for customizing maps configuration settings. The app allows the site owner to configure many aspects of the widget without the assistance of a developer. More information about the tool and how to get started is available here: <https://s3.amazonaws.com/tn-release/retail/maps/MapsConfigurationManagement.pdf>.

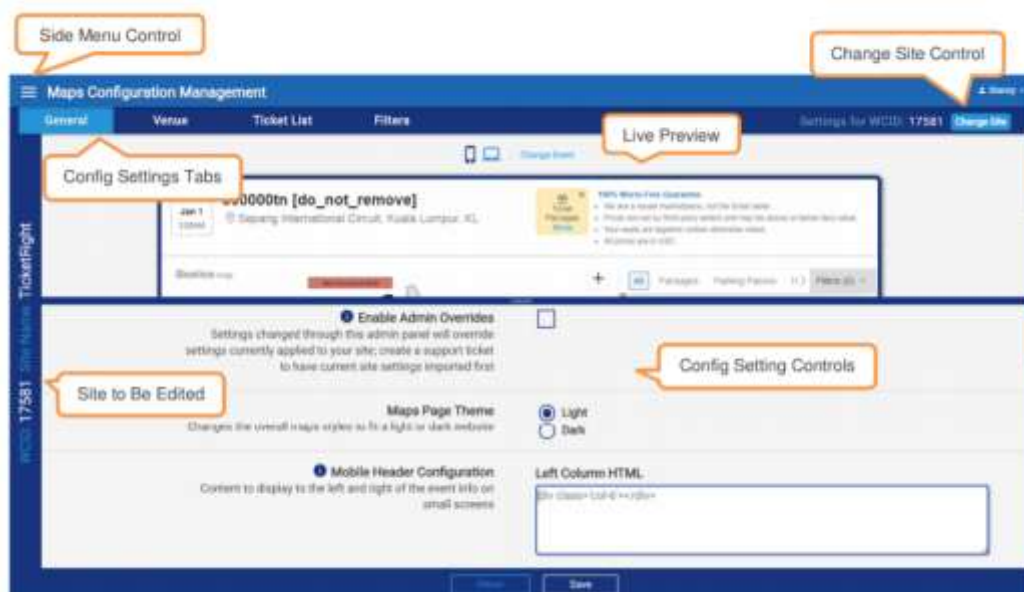



IMPORTANT: If you'd like to use the Maps Configuration Management tool to handle your maps configuration, please contact our support staff about getting a TN Portal account and permissions to access the tool.

CONFIGURATION IN CODE

Below the inclusion of the widget block, many properties of the `Seatics.config` object can be overridden to customize the widget. Configuration can be done in JavaScript, or many settings can be changed through the Maps Configuration Management tool. None of these options is mandatory to set. See the Appendix for screenshots and more detail about each setting.

Property	Definition	Default	Availability
<code>Seatics.config.useC3</code>	Enables sending traffic to C3 if the site is set up to use it	false	V2 & V3
<code>Seatics.config.c3CheckoutDomain</code>	The checkout URL to use for sites on C3 checkout	null	V2 & V3
<code>Seatics.config.c3UtmSource</code>	The tracking source of the visitor.	utm_source of query string	V2 & V3
<code>Seatics.config.c3UtmMedium</code>	The tracking medium of the visitor.	utm_medium of query string	V2 & V3
<code>Seatics.config.c3UtmCampaign</code>	The tracking campaign of the visitor.	utm_campaign of query string	V2 & V3
<code>Seatics.config.c3UtmContent</code>	The tracking content of the visitor.	utm_content of query string	V2 & V3
<code>Seatics.config.c3UtmTerm</code>	The tracking term of the visitor.	utm_term of query string	V2 & V3
<code>Seatics.config.c3PromoCode</code>	A promo code to apply in checkout.	sea_promo_code of query string	V2 & V3
<code>Seatics.config.c3PaymentMethods</code>	A comma-separated list of payment methods to allow in checkout. Works as a restriction; will not add any options that would not normally be available to the user.	sea_payment_methods of query string	V3
<code>Seatics.config.levelColors</code>	An array of colors to use for the map levels on non-zone maps; one property used to set color scheme	["#d86f6f", "#e2a6a6", "#f4ad58", "#ffd797", "#bc91c1", "#e5cae2", "#66b6dd", "#a3ddf8", "#abcb59", "#d2e08b", "#bfa082", "#d9d7ba", "#589caf", "#bcd3e7", "#fff871", "#fff7a9", "#9bc9a2", "#c7ddc8"]	V2 & V3
<code>Seatics.config.levelColorsSmallVenue</code>	An array of colors to use for the map levels on non-zone maps when the venue has 3 levels or less; one property used to set color scheme	["#e5cae2", "#a3ddf8", "#d2e08b"]	V2 & V3
<code>Seatics.config.zoneColors</code>	An array of colors to use for zones on zone maps; one property used to set color scheme	["#d86f6f", "#e2a6a6", "#f4ad58", "#ffd797", "#bc91c1", "#e5cae2", "#66b6dd", "#a3ddf8", "#abcb59", "#d2e08b", "#bfa082", "#d9d7ba", "#589caf", "#bcd3e7", "#fff871", "#fff7a9", "#9bc9a2", "#c7ddc8"]	V2 & V3

Seatics.config.useSuperLevels	Determines whether or not complex maps are simplified; one property used to set color scheme	true	V2 & V3
Seatics.config.sectionNoTicketsColor	The color used for sections with no tickets available.	#e2e2e2	V2 & V3
Seatics.config.customLevels	Allows the site to define custom venue levels		V2 & V3
Seatics.config.noMapImageUrl	Allows the site to override the placeholder 'Map Coming Soon' image with a custom image	https://d340sbn9oxreq3.cloudfront.net/mapcomingsoon.png	V2 & V3
Seatics.config.ticketsState	Specifies which presentation of the legend to use	legendDriven: false showLegendFirstOnMob: false	V3 only
Seatics.config.noEventHandler	A function that will be called if the event is expired	Error message	V2 & V3
Seatics.config.noTicketsHandler	A function that will be called if there are no tickets for the event	Error message	V2 & V3
Seatics.config.selectionScheme	Sets how selected sections on the map appear	0	V2 & V3
Seatics.config.selectionColor	Sets pulse color for map highlighting and selected section fill color for selection scheme 1	#ffff00	V2 & V3
Seatics.config.alwaysShowAvailQty	Determines how quantity of tickets available is expressed in the ticket list	false	V3 only
Seatics.config.preCheckoutButtonHtml	Sets content for the 'Go to Secure Checkout' button	Go to Secure Checkout	V2 & V3
Seatics.config.buyButtonContentHtml	Sets content for the CTA button in the TG row	Price per ticket	V2 & V3
Seatics.config.tgGuaranteeNoteHtml	Allows editing of guarantee text in pre-checkout interstitial	100% Worry-Free Guarantee	V2 & V3
Seatics.config.ticketSeparationOptions	Sets how to handle unmapped inventory by ticket group type	packages: Seatics.TicketGroupSeparationOptions .Integrate, parking: Seatics.TicketGroupSeparationOptions .Separate, passes: Seatics.TicketGroupSeparationOptions .Separate, hotels: Seatics.TicketGroupSeparationOptions .Separate, unmappedFlex: Seatics.TicketGroupSeparationOptions .Integrate, unmappedStandard: Seatics.TicketGroupSeparationOptions .Separate	V2 & V3
Seatics.config.useH1Tag	Controls whether to use an <h1> heading tag for the event name or a <div> tag	true	V3 only

Seatics.config.tgMarkHtml	Allows the site to specify what symbol to use to mark featured inventory	★	V2 & V3
Seatics.config.tgMarkTooltipText	Allows the site to customize the tooltip text that explains the inventory mark	We recommend this seller's tickets.	V2 & V3
Seatics.config.defaultSort	Sets how ticket groups are sorted by default	Seatics.SortOptions.PriceAsc	V2 & V3
Seatics.config.SaveFilterOptions	Allows site to disable saving filter settings	true	V2 & V3
Seatics.config.showLocalPickupFilter	Allows site to enable Local Pickup filter	false	V2 & V3
Seatics.config.onBuyButtonClicked	A function that can be used to track when users click the CTA button		V2 & V3
Seatics.config.mapFinishedRenderingHandler	A function that can be used to track interactions with the UI		V2 & V3
Seatics.config.enableMyList	Allows site to enable the My List feature	false	V2 & V3
Seatics.config.showCents	Allows site to display prices with decimal values	false	V2 & V3
Seatics.config.displayFaceValuePreCheckout	Allows site to enable face value display on pre-checkout screen	false	V2 & V3
Seatics.config.displayFaceValueTicketList	Allows site to enable face value display on main list	false	V2 & V3
Seatics.config.displayFaceValueForUnknownValues	Additional configuration option for when either displayFaceValueTicketList or displayFaceValuePreCheckout is true. Allows site to configure whether to include face value display artifacts when the face value of a ticket is unknown (0 or not provided). If false, this will exclude any face value labels, values, or help text from the display for tickets with an unknown face value. If true, this will display the text "No Face Price" in place of where the face value is normally shown.	false	V2 & V3
Seatics.config.filterOutUnknownFaceValueTgs	Filters out ticket groups with a tgFaceValue of 0 from the display so they are not shown to the user at all.	false	V2 & V3
Seatics.config.faceValueHelpText	Allows site to customize explanation for face value for real tickets. NOTE: does	This is the original ticket price, as set by the primary seller. Tickets sold through our marketplace are re-priced by secondary sellers	V2 & V3

	not apply to speculative inventory.	and may be above or below face value.	
Seatics.config.faceValueHelpAlternateText	Allows site to customize explanation for unknown face value for real tickets. NOTE: does not apply to speculative inventory.	The seller has not provided the original price for these tickets. Tickets sold through our marketplace are re-priced by secondary sellers and may be above or below face value.	V2 & V3
Seatics.config.googlePPCAutoDetect	Enable to determine if traffic is coming from a Google PPC ad	false	V2 & V3
Seatics.config.googleReferralSettings	Allows site to customize experience for Google PPC traffic		V2 & V3
Seatics.config.isGooglePPCReferral	Allows site to write their own logic to determine if traffic is coming from a Google PPC ad		V2 & V3
Seatics.config.ticketTypeConstraints	Allows filtering of the list to certain ticket types		V2 & V3
Seatics.config.deliveryTypeConstraints	Allows filtering of the list to certain delivery types		V2 & V3
Seatics.config.ticketQuantityConstraints	Allows filtering of the list to certain quantity		V2 & V3
Seatics.config.ticketPriceConstraints	Allows filtering of the list to certain price range		V2 & V3
Seatics.config.enableQuantityModal	Allows site to ask user to select quantity when entering the page	false	V3 only
Seatics.config.enableFeedback	Allows site to disable the embedded feedback feature	true	V3 only
Seatics.config.disableBuyButtonNoQuantitySelection	Allows site to disable the buy button until user selects ticket quantity	false	V3 only
Seatics.config.enablePrecheckoutCountdown	Allows site to show a countdown timer in precheckout to create urgency to purchase	true	V2 & V3
Seatics.config.precheckoutCountdownTimeMilliseonds	Sets the length of time for the timer	240999 (4 min)	V2 & V3
Seatics.config.showAllInPricingToggle	Displays a toggle to allow user to choose between showing prices with or without fees	true	V3 only
Seatics.config.includeServiceFeesInTicketPrice	Allows site to display ticket prices including the fees. When true, users who proceed to Checkout will immediately see fees regardless of the normal behavior.	false	V2 & V3
Seatics.config.showPriceBreakdownPrecheckout	Works in combination with includeServiceFeesInTicketPrice. Allows the site to display an itemized	false	V2 & V3

	breakdown of the ticket price and the fees within the pre-checkout.		
Seatics.config.showPriceBreakdownTicketList	Works in combination with includeServiceFeesInTicketPrice. Allows the site to display an itemized breakdown of the ticket price and the fees within the main list.	false	V2 & V3
Seatics.config.showFeesInCheckout	Allows the site to force fees to show up immediately in Checkout regardless of the normal behavior. Works independently of includeServiceFeesInTicketPrice.	false	V2 & V3
Seatics.config.enableCheckoutDeepLinking	Allows site to disable the deep link capability that sends customers straight to checkout	true	V3 only
Seatics.config.checkoutDeepLinkTgIDKey	Allows site to customize which query string parameter is used to specify the deep linked ticket group's id	tgid	V3 only
Seatics.config.checkoutDeepLinkTgID	Allows site to provide an alternate value or function to determine the deep linked ticket group's id		V3 only
Seatics.config.checkoutDeepLinkQuantityKey	Allows site to customize which query string parameter is used to specify the quantity of tickets the customer wants for the deep linked ticket group	qty	V3 only
Seatics.config.checkoutDeepLinkQuantity	Allows site to provide an alternate value or function to determine the quantity of tickets the customer wants for the deep linked ticket group		V3 only
Seatics.config.checkoutDeepLinkExpectedPriceKey	Allows site to customize which query string parameter is used to specify the price (each) the customer expects to pay for the deep linked tickets	prc	V3 only
Seatics.config.checkoutDeepLinkExpectedPrice	Allows site to provide an alternate value or function to determine the price (each) the customer expects to pay for the deep linked tickets		V3 only

Seatics.config.checkoutDeepLinkCustomerNameKey	Allows site to customize which query string parameter is used to specify the name of the customer that the deep link is for	cstnm	V3 only
Seatics.config.checkoutDeepLinkCustomerName	Allows site to provide an alternate value or function to determine the name of the customer that the deep link is for		V3 only
Small Screen Specific Options			
Seatics.config.smallScreenMapLayout	Specifies how much of the map to show on small screen	Seatics.SmallScreenMapOptions.HiddenWithPreview	V2 & V3 (FullyShown in V3 only)
Seatics.config.eventInfoLeftCol	HTML for site logo or other content in mobile header	null	V2 & V3
Seatics.config.eventInfoRightCol	HTML for phone icon or other content in mobile header	null	V2 & V3
Seatics.config.skipPrecheckoutMobile	Determines whether user must open pre-checkout info before proceeding to checkout on mobile	false	V2 & V3
Seatics.config.enableLegalDisclosureMobile	Determines whether reseller disclosures display on the small screen layout	true	V2 & V3
Seatics.config.listLegalDisclosure	Allows site to edit the HTML of the disclosure banner on mobile		V2 & V3
Seatics.config.enableHeaderLowerLegalDisclosureMobile	Displays the reseller disclosure below the mobile header	false	V2 & V3
Seatics.config.enableHeaderLegalDisclosureMobile	Displays the reseller disclosure above the mobile header	false	V2 & V3
Seatics.config.enableListMarketingMobile	Determines whether to display packages marketing above the ticket list on mobile.	true	V2 & V3
Seatics.config.listMarketingHtmlFilter	Allows site to edit the HTML displayed above the ticket list to encourage user to browse packages	'<div class="sea-list-marketing-inner vertical-align-middle">Ticket Packages Available!Show Packages</div>'	V2 & V3
Seatics.config.listMarketingHtmlAll	Allows site to edit the HTML displayed above the ticket list when the user filters to packages	'<div class="sea-list-marketing-inner vertical-align-middle">Ticket	V2 & V3

		Packages Available!Hide Packages</div>'	
Seatics.config.showZoomControls	Shows/hides zoom controls on mobile	false	V2 & V3
Large Screen Specific Options			
Seatics.config.ticketListOnRight	Sets whether the ticket list is on the left and the map on the right or the map is on the left and the ticket list on the right	true	V2 & V3
Seatics.config.mapContained	Sets whether the map is contained or is the background of the page	false	V2 & V3
Seatics.config.mouseWheelZoomEnabled	Determines whether scrolling the mouse wheel zooms the map or scrolls the page	false	V3 only
Seatics.config.desktopEventInfoRightCol	Allows the site to override HTML to customize guarantee language and disclosures		V2 & V3
Seatics.config.legendExpanded	Sets whether the default legend is expanded or collapsed on page load	false	V2 & V3
Seatics.config.skipPrecheckoutDesktop	Determines whether user must open pre-checkout info before proceeding to checkout on desktop	false	V2 & V3
Seatics.config.enableMapMarketing	Determines whether to display packages marketing in the map area.	false	V2 & V3
Seatics.config.mapMarketingHtmlFilter	Allows site to edit the HTML displayed in the map marketing area to encourage user to browse packages	'<div id="sea-map-marketing-close" class="sea-marketing-header-close icon-cancel"></div>Ticket PackagesShow'	V2 & V3
Seatics.config.mapMarketingHtmlAll	Allows site to edit the HTML displayed in the map marketing area when the user filters to packages	'<div id="sea-map-marketing-close" class="sea-marketing-header-close icon-cancel"></div>Ticket PackagesHide'	V2 & V3
Seatics.config.enableHeaderMarketing	Determines whether to display packages marketing in the event info area.	true	V2 & V3

Seatics.config.headerMarketingHtmlFilter	Allows site to edit the HTML displayed in the event info marketing area to encourage user to browse packages	'<div id="sea-marketing-header-close" class="sea-marketing-header-close icon-cancel"></div>Ticket PackagesShow'	V2 & V3
Seatics.config.headerMarketingHtmlAll	Allows site to edit the HTML displayed in the event info marketing area when the user filters to packages	'<div id="sea-marketing-header-close" class="sea-marketing-header-close icon-cancel"></div>Ticket PackagesHide'	V2 & V3
Seatics.config.enableListMarketingDesktop	Determines whether to display packages marketing above the ticket list on desktop.	false	V2 & V3

CUSTOMIZING STYLES

The default styling of the UI is a generic, light colored theme. There is also the option to use a dark colored theme for your base styling. To use the dark theme, you will need to append a parameter to your Mapwidget3 call as in the examples below:

JS endpoint:

<http://mapwidget3.seatics.com/js?eventId=203518&websiteConfigId=690&useDarkTheme=true>

HTML endpoint:

<http://mapwidget3.seatics.com/html?eventId=203518&websiteConfigId=690&userAgent=something&useDarkTheme=true>

Both themes were created with the expectation that sites will customize styles to match brand standards. Customization of styling can best be achieved by adding a new stylesheet. Call a custom stylesheet after inclusion of the API call.



Please note: Editing the UI's default stylesheet directly is not recommended. Any changes to the default stylesheet may be overwritten when subsequent updates to the API are released. **Add a separate, custom stylesheet to apply your styling.**

If the widget is integrated with a responsive site, CSS will need to be added to hide the full site header and footer when the layout switches from desktop to mobile. The mobile layout expects to use the full screen and may not work correctly if additional page elements are placed above or below it. Below is an example CSS declaration that could be used to trigger the hiding of your site's header and footer:

```
@media screen and (max-width: 991px) {

    /* Hide your header and footer here */

}
```

Please note Bootstrap CSS is no longer used in this version of the widget.

USER EVENT TRACKING

User event tracking in the maps can be accomplished by creating a “user event listener” and registering it with the map event tracker.

The listener will be a function that takes two parameters: an event type and event data. Below is a basic example:

EXAMPLE CODE – USER EVENT TRACKING

```
$(function() {
    var userEventListener = function(eventType, eventData) {
        console.log("Tracking Event " + eventType);
        console.log(eventData);
    };
    Seatrics.TrackingEvents.registerEventListener(userEventListener);
});
```

There are four eventTypes currently:

- FinishedLoading
- MapInteraction
- FiltersChanged
- BuyButtonClicked

Each event type will have different event data associated with it:

eventType	eventData	Example
FinishedLoading	eventId numTickets	{eventId:1234567, numTickets:10, numTicketGroups:2}

MapInteraction	numTicketGroups	
	pan	{interactionType:"pan"}
	zoom	
	mapReset	
	expandedMap	
FiltersChanged	selection	
	changeType	{changeType:"priceMin", changeToValue:25}
	- sort	
	- quantity	
	- etixOnly	
	- ticketType	
	- priceMin	
	- priceMax	
	- reset	
	changeToValue	
BuyButtonClicked	listPlacement	{listPlacement:2, filters:{aBigJsObject}}
	filters	

FinishedLoading will have the event ID, number of tickets available for the event at the time of visit, and number of ticket groups available for the event at the time of visit.

MapInteraction will have an `interactionType`. Interaction types include pan, zoom, resetting the map, expanding the map (unhiding it on mobile) or section selection.

FiltersChanged will have a `changeType` and a `changeToValue`. The possible change types include sort, quantity, e-tickets only, ticket type, minimum price, maximum price, and resetting the price filter. The `changeToValue` passes the new value set by the user.

BuyButtonClicked will have `listPlacement` (the placement of the ticket group in the list, from the top) and the filter settings at time of button click. For example, if the user clicks to buy the third ticket down on list `{listPlacement:2, filters:{aBigJsObject}}`.¹

FOREIGN LANGUAGE SUPPORT

The Seatics Mapwidget has been translated to support sites using the languages Spanish, French, Portuguese, and German. The Mapwidget will detect the site language from its website configuration settings, or a language can be specified by appending the language parameter to the Mapwidget script as shown below.

Spanish: <https://mapwidget3.seatics.com/js?eventId=203518&websiteConfigId=690&lang=es>

French: <https://mapwidget3.seatics.com/js?eventId=203518&websiteConfigId=690&lang=fr>


¹ The first ticket group in the list is at `listPlacement:0`.

Portuguese: <https://mapwidget3.seatics.com/js?eventId=203518&websiteConfigId=690&lang=pt>


German: <https://mapwidget3.seatics.com/js?eventId=203518&websiteConfigId=690&lang=de>

CURRENCY SYMBOL SUPPORT

By default, all sites are assumed to be listing their prices in USD and Maps will use a dollar sign (\$) as the currency symbol.



However, the dollar sign is used for multiple currencies around the world and can be ambiguous to some users. In cases where the currency might be unclear, Maps will format prices using the globally recognized “US\$” symbol instead of just the dollar sign.



This clarification will happen for all events that are outside of the United States, as well as for all users who are not native to the US.

If you would like to adjust your currency, symbol, or currency globalization settings please see the [Currency Symbol Configuration](#) section in the Appendix.

INVENTORY DISCLAIMERS

In some jurisdictions, ticket marketplaces are required to disclose if tickets have not yet been purchased by seller, but the seller guarantees to procure the tickets once requested.

If an event takes place in New York, or the site detects the customer is visiting from an IP address in New York, Mapwidget adds an indicator to affected ticket groups that signals there is a disclosure for that inventory.


SUN
Oct 31, 2021
7:00PM

Wicked
Gershwin Theatre, New York,
[Important Event Information](#)

Tickets	Parking Passes	Filters (0) ▾
Middle & Rear Mezzanin... Row H 1-6 Tickets  Important: Zone Seating 		\$121/ea
Middle & Rear Mezzanin... Row H 1-4 or 6 Tickets  Important: Zone Seating 		\$123/ea
Orchestra Left Row W 1-6 Tickets  Important: Zone Seating 		\$131/ea

Tickets that will be acquired upon purchase are identified by the 'Important Message' link on the ticket group row.

When a customer clicks on the link, a modal opens with the disclaimer explaining that the tickets are guaranteed and will be acquired by the seller upon receipt of the order. If the customer chooses to buy the tickets, they will be required to acknowledge acceptance of the disclaimer in checkout.

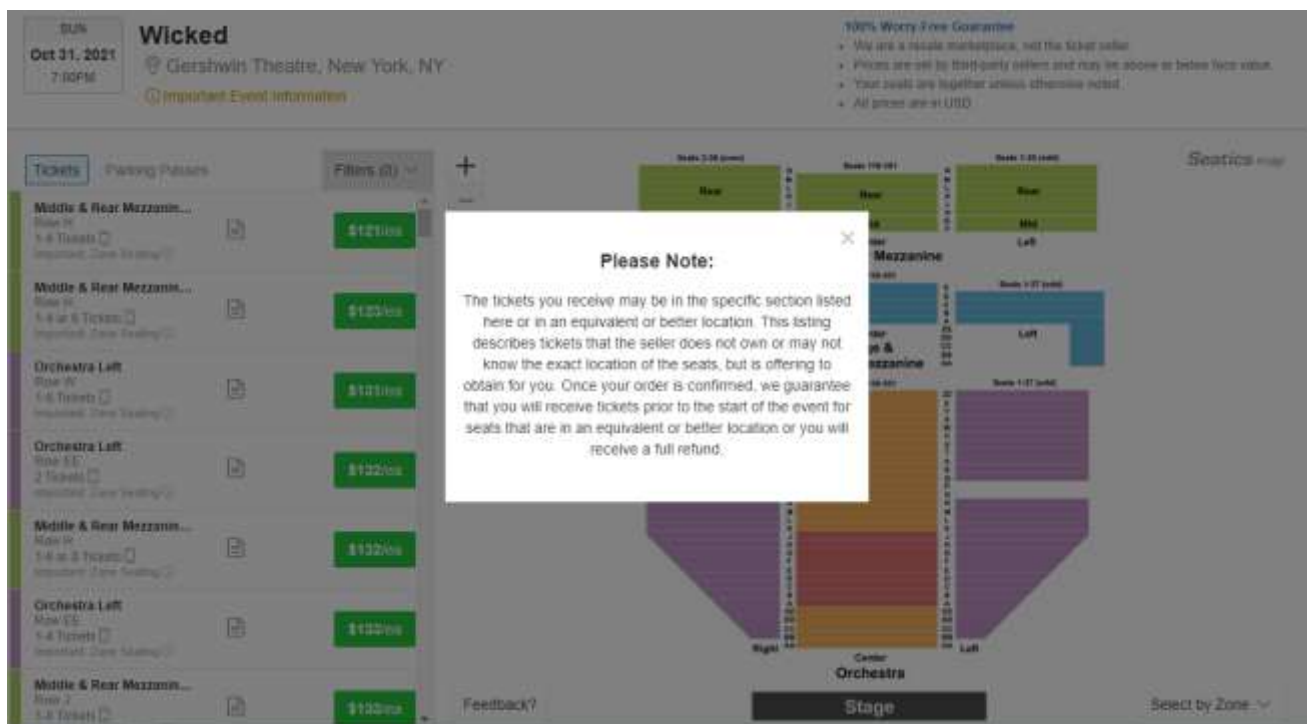

Clicking 'Important Message' opens the disclaimer modal.

SUPPORT

If you have questions or would like to report bugs in the code or errors in the documentation, please contact us by creating a support ticket through the Point of Sale or Web Admin or by emailing support@ticketnetwork.com. Please make sure to provide your BID or ZX# as well as any code snippets or screenshots that may help us understand your issue.

FEEDBACK AND FEATURE REQUESTS

Your feedback is important to us so we can build the best product for your needs. Please submit comments and feature requests to MapsFeedback@ticketnetwork.com. Our team may contact you to follow up on your feedback.

APPENDIX

BASIC CONFIGURATION SETTINGS

CHECKOUT CONFIGURATION

If your site is set up to direct to C3 Checkout, set `Seatics.config.useC3` to `true`. `Seatics.config.c3CheckoutDomain` is then used to specify the URL of the site's checkout. Tracking parameters and promo codes are supported by using additional configuration parameters.

code snippet:

```
<script>
  Seatics.config.useC3 = true;
  Seatics.config.c3CheckoutDomain = "https://checkout.domain.com";
  Seatics.config.c3CurrencyCode="USD";
  Seatics.config.c3UtmSource = "source";
  Seatics.config.c3UtmMedium = "medium";
  Seatics.config.c3UtmCampaign = "campaign";
  Seatics.config.c3UtmContent = "content";
  Seatics.config.c3UtmTerm = "term";
  Seatics.config.c3PromoCode = "10PCTOFF";
</script>
```

CURRENCY SYMBOL CONFIGURATION


Maps uses an object called `currencyIntl` (currency internationalization) to define what currency symbol to use when formatting prices for various events and users. Maps comes preconfigured with settings for USD and will automatically use the clearer “US\$” symbol when appropriate (based on the user’s language and event location). However, it is possible to adjust these configurations to remove or customize the globalization effect.

DOLLAR SIGN (\$) ONLY, NO USE OF US\$

If you would like to turn off currency globalization altogether so that just the dollar sign (\$) is used, clear out the settings in `currencyIntl`. This will remove the globalization effect for USD, and prices will never be listed with the symbol “US\$”.

code snippet:

```
<script>
  Seatics.config.currencyIntl = {};
</script>
```



NON-USD CURRENCY THAT USES DOLLAR SIGN (\$)



IMPORTANT: The following two sections explain how to change the currency symbol that is displayed in Maps. However, this does not imply support for currency exchange, nor does the TicketNetwork system support charging for tickets in non-USD currencies. Integrators who change the currency symbol are responsible for making sure that the prices shown in Maps are accurate and correct regarding what is charged.

If you are listing your prices in a currency that is not USD, but which still uses a dollar sign (\$) for notation, you must make at least some configuration changes so that Maps does not mistakenly show the “US\$” symbol.

You can follow the directions in the previous section if you’d like to totally remove all globalization effects and just show “\$” in all cases. Or you can set up your own globalization settings for your currency.

code snippet:

```
<script>
  Seatics.config.c3CurrencyCode = "AUD"; // Lets Maps know that you are Australian Dollars instead of US Dollars.
  This tells Maps which currencyIntl globalization setting to use.
  Seatics.config.currencyIntl = { "AUD": { country: "AU", foreignSymbol: "AU$", nativeSymbol: "$" } }; // Configures
  globalization settings for Australian Dollars. Users who are native Australians and are viewing tickets for events in
  Australia will see "$". Non-Australian users and users looking at events outside of Australia will see the "AU$" currency
  symbol instead.
</script>
```




ALTERNATE CURRENCY SYMBOL

If you would like to completely change the currency symbol used within the display to something other than the dollar sign (\$), just set the currencySymbol configuration property. Changing the currencySymbol will also bypass the logic to show “US\$” because Maps will detect that your symbol does not match the native symbol for USD.

code snippet:

```
<script>
  Seatics.config.currencySymbol = "€";</script>
```



Currency symbol can also be set from the Ticket List tab in Maps Configuration Management:

i Currency Symbol
Replaces the \$ symbol throughout the mapwidget UI



DARK THEME


Append &useDarkTheme=true to the widget script to use the dark styling. This theme is available only in Mapwidget3.

This can also be set from the General tab in Maps Configuration Management:


Maps Page Theme
Changes the overall maps styles to fit a light or dark website



Dark theme applied to the main maps screen

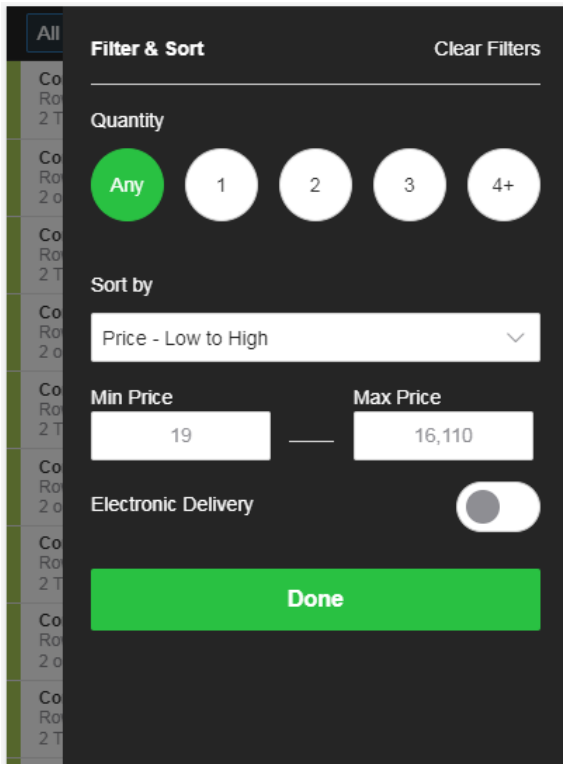

Dark theme applied to the filters menu

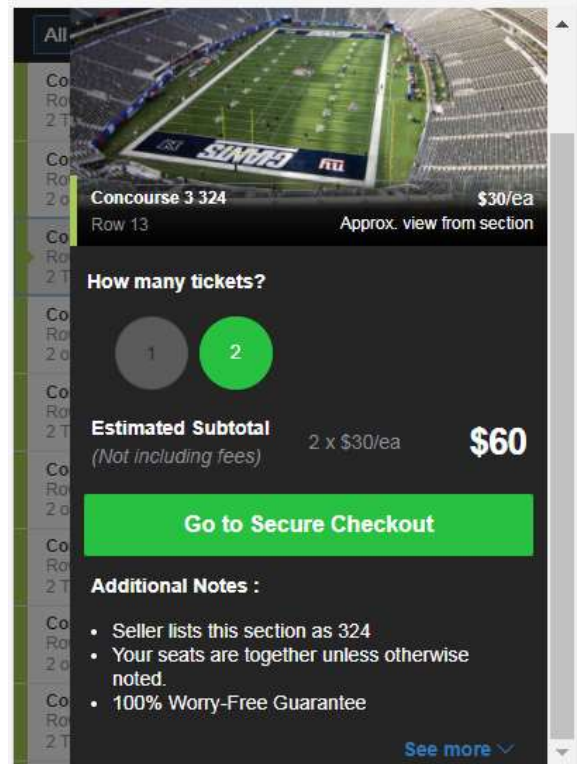

Dark theme applied to the ticket details screen

H1 HEADING TAG




By default, the map will use an `<h1>` heading element for the event name. However, if you would like to completely control the layout of the page headings and optimize your website for SEO, you may choose to render the event name in a non-heading tag. Use `Seatics.config.useH1Tag` to configure whether the event name is rendered within an `<h1>` or a `<div>`. Using either the `<h1>` or the `<div>` element for the event name will maintain the same layout and styling. This setting is only available in Maps V3.

code snippet:

```
<script>
  Seatics.config.useH1Tag = false;
</script>
```

MOBILE HEADER CONFIGURATION

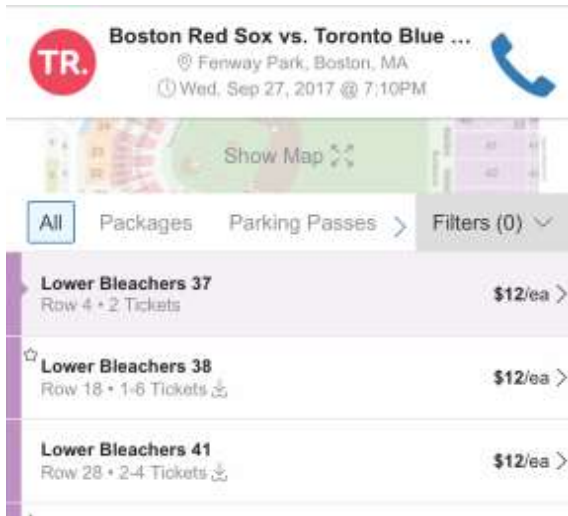

In lieu of a full header, the event info bar on mobile can be configured to display content such as the site logo and a phone icon. Use `Seatics.config.eventInfoLeftCol` to set HTML for the area on the left side of the event info. Use `Seatics.config.eventInfoRightCol` to set HTML for the area to the right side.

code snippet:

```
<script>
  Seatics.config.eventInfoLeftCol = '<a href="/"><img
src=https://s3.amazonaws.com/ticketnetwork/demo/tr/TR_logo_s
mall2x.png height="55px" width="55px" style="padding:5px;
vertical-align:top;" /></a>',
  Seatics.config.eventInfoRightCol = '<a
href="tel:8608675309"><span style="font-size:40px; vertical-
align:top; padding:5px;" class="glyphicon glyphicon-
earphone"></span></a>';
</script>
```

These configurations can also be set from the General tab in Maps Configuration Management:


Mobile Header Configuration
 Content to display to the left and right of the event info on small screens

Left Column HTML

div class="col-6"></div>


Add an image URL
 Populates code in "Left Column HTML" above



Right Column HTML


div class="col-6"></div>

LARGE SCREEN DISCLOSURES CUSTOMIZATION

100% Worry-Free Guarantee

- ✓ Example Ticket Site is a resale marketplace, not the ticket seller.
- ✓ Prices are set by third-party sellers and may be above or below face value.
- ✓ Your seats are together unless otherwise noted.
- ✓ All sales are final.

Disclosures Area

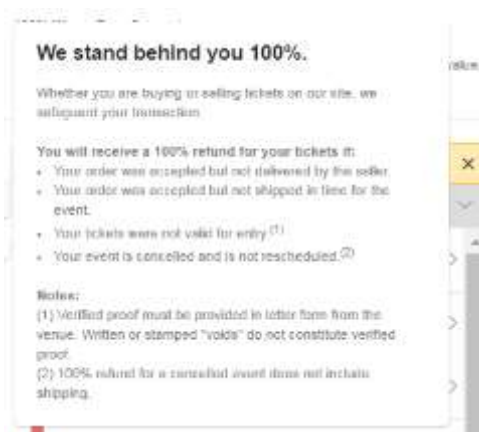

Guarantee Pop Up

In the right side of the Event Info Bar is a region meant to display legal disclosures, as well guarantee language or other trust signals. `Seatics.config.desktopEventInfoRightCol` allows the site to override the default HTML.




If you remove the disclosures "We are a resale marketplace, not the ticket seller. Prices are set by third-party sellers and may be above or below face value," from this region and you are **NOT** a ticket broker, you **MUST** include the disclosures elsewhere on the page where the notes are above the fold, conspicuous, and unavoidable.

code snippet:

```
<script>
Seatics.config.desktopEventInfoRightCol = '<div class="event-info-disclaimer"><a id="event-info-guarantee-show"
class="event-info-guarantee-show" href="javascript:">100% Worry-Free Guarantee</a><br><span>&#x2713; Example Ticket Site
is a resale marketplace, not the ticket seller.</span><br><span>&#x2713; Prices are set by third-party sellers and may
be above or below face value.</span><br><span>&#x2713; Your seats are together unless otherwise
noted.</span><br><span>&#x2713; All sales are final.</span><br><div id="event-info-guarantee" class="event-info-
guarantee" style="display: none;"><a id="event-info-guarantee-close" class="event-info-guarantee-close icon-cancel"
href="javascript:void(0)"></a><h3>We stand behind you 100%.</h3><br><p>Whether you are buying or selling tickets on our
site, we safeguard your transaction.</p><br><p><strong>You will receive a 100% refund for your tickets
if:</strong></p><ul><li>Your order was accepted but not delivered by the seller.</li><li>Your order was accepted but not
shipped in time for the event.</li><li>Your tickets were not valid for entry.</li><li>Your event is
cancelled and is not rescheduled.</li></ul><br><p><strong>Notes:</strong></p><p>(1) Verified proof must
be provided in letter form from the venue. Written or stamped "voids" do not constitute verified proof.</p><p>(2) 100%
refund for a cancelled event does not include shipping.</p></div></div>';
</script>
```


This configuration can also be set from the General tab in Maps Configuration Management:

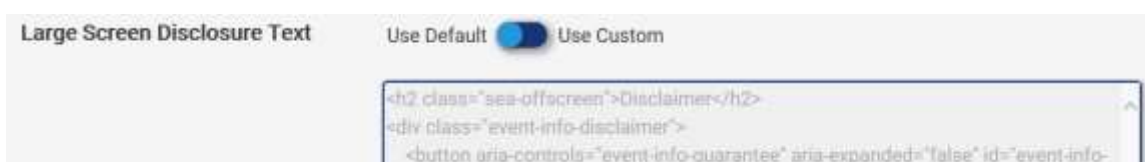

MOBILE DISCLOSURES CUSTOMIZATION

As of early 2018, ticket resale sites are required to obtain Google certification to advertise through AdWords. The mobile reseller disclosure helps sites to meet Google's first three requirements. There are a variety of configuration options for the placement of this disclosure.

These configurations can be set from the General tab in Maps Configuration Management:

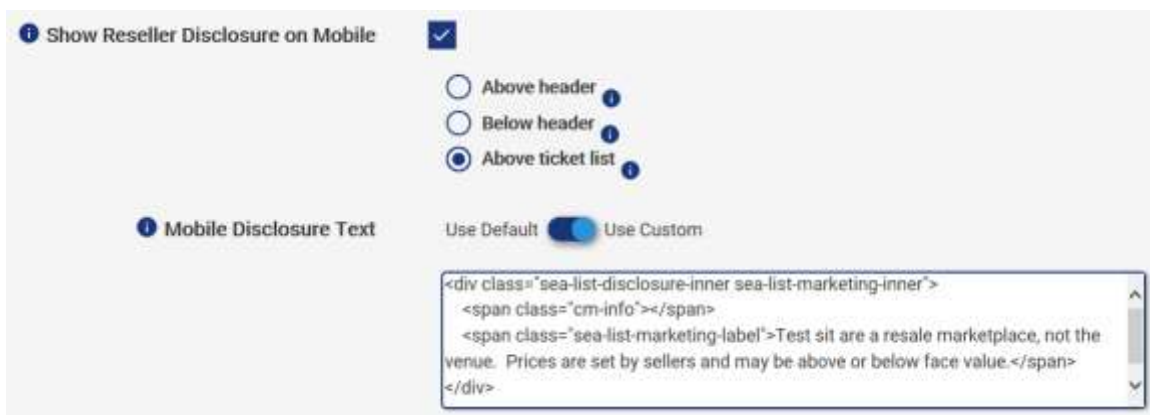


Show Reseller Disclosure on Mobile ☒

☐ Above header
☐ Below header
☒ Above ticket list

Mobile Disclosure Text Use Default ☐ Use Custom ☒

```
<div class="sea-list-disclosure-inner sea-list-marketing-inner">
  <span class="cm-info"></span>
  <span class="sea-list-marketing-label">Test sit are a resale marketplace, not the
venue. Prices are set by sellers and may be above or below face value.</span>
</div>
```

Or in code:

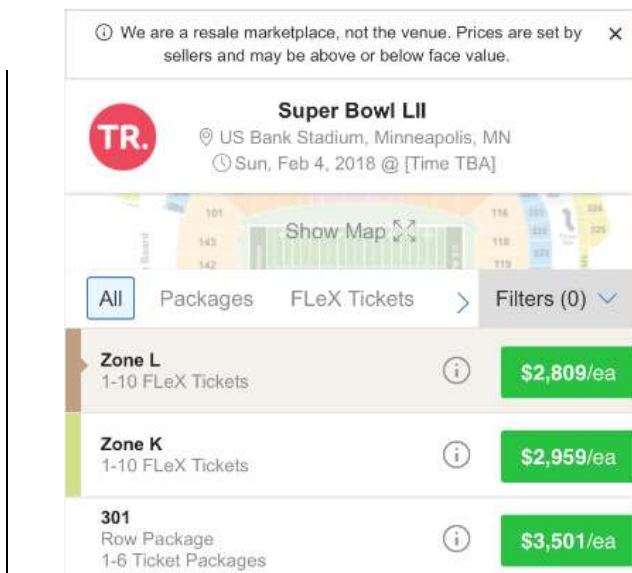


Disclosure at Top of Page

To display the disclosure at the top of the page in the small screen layout, set `enableHeaderLegalDisclosureMobile` to `true`.

Make sure that `enableLegalDisclosureMobile`—the default presentation of the disclosure—is set to `false` to prevent duplicate banner displays.

example code:

```
<script>
  Seatics.config.enableLegalDisclosureMobile = false;
  Seatics.config.enableHeaderLegalDisclosureMobile =
true;
</script>
```

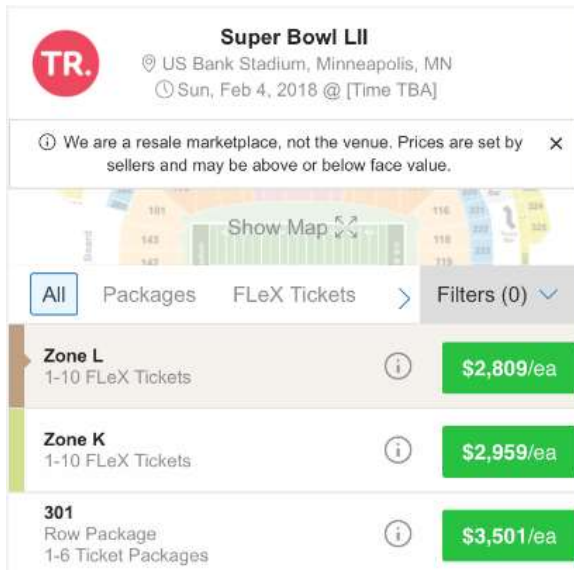
Disclosure Below the Header

To display the disclosure below the header and above the map, set `enableHeaderLowerLegalDisclosureMobile` to `true`.

Make sure that `enableLegalDisclosureMobile`—the default presentation of the disclosure—is set to `false` to prevent duplicate banner displays.

example code:

```
<script>
    Seatics.config.enableLegalDisclosureMobile = false;
    Seatics.config.enableHeaderLowerLegalDisclosureMobile
    = true;
</script>
```

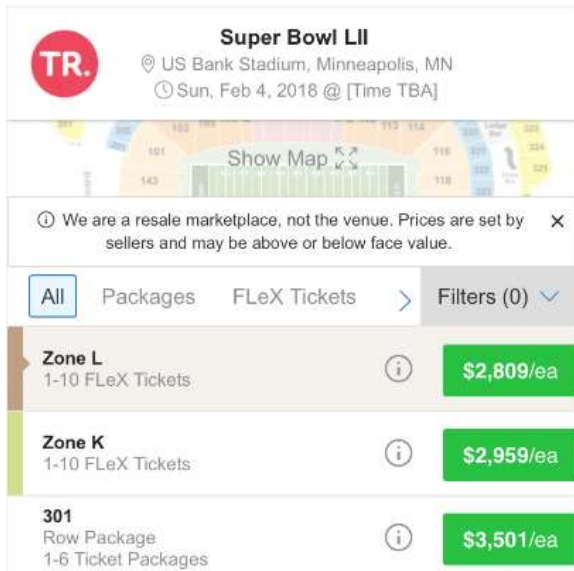

Disclosure Below the Map

By default the disclosure will display below the map region and above the ticket list. To implement this option, nothing needs to be done unless you've previously disabled the small screen disclosure.

example code:

```
<script>
    Seatics.config.enableLegalDisclosureMobile = true;
</script>
```

With all options the content of the disclosure banner is configurable as well. This allows you to edit the text to be consistent with the messaging across the rest of your site, if needed. The html of the reseller disclosure can be overridden using `Seatics.config.listLegalDisclosure`.

code snippet:

```
<script>
    Seatics.config.enableLegalDisclosureMobile = true;
    Seatics.config.listLegalDisclosure = '<div class="sea-list-marketing-inner">\
<span class="cm-info"></span>\
<span class="sea-list-marketing-label" id="sea-listdisclosurelabel">{{sea_disclosure_language}}</span>\
</div>';
</script>
```

Should you decide to disable the disclosure completely, simply set any enabled disclosures to `false`. The banners will no longer display on your small screen layout.

```
Seatics.config.enableLegalDisclosureMobile = false;
Seatics.config.enableHeaderLegalDisclosureMobile = false;
Seatics.config.enableHeaderLowerLegalDisclosureMobile = false;
```

FACE VALUE DISPLAY

Google says that at a future date they intend to begin enforcing their next requirement to maintain certification to advertise through Adwords—surfacing face value on the ticket results page. Several configuration options were added in early 2018 in anticipation of this change. These are disabled by default, but can be enabled if desired.

Please note, the Venue Map may automatically override some of these settings for certain users for compliance reasons.

FACE VALUE FOR REAL TICKETS

Tic

×

Second Mezzanine 401

Row E

How many tickets?

1

2

Estimated Subtotal

2 x \$1,322/ea

\$2,644

(Not including fees)

Checkout

Face Value

\$1,555/ea

?

Face value reflects the original price of the tickets.

The price you'll pay is the current market value,

which may be above or below face value.

Delivery Method

Mobile Ticket

i

Additional Notes :

- Must have smart device on hand to enter event.
- Tickets will be ready for delivery by Oct 19, 2023.

Face Value in the Ticket Details Screen

To enable the face value display on the ticket details screen, simply set `Seatics.config.displayFaceValuePreCheckout` to true.

Use `Seatics.config.faceValueHelpText` to edit the face value explanation. The default language is: "This is the original ticket price, as set by the primary seller. Tickets sold through our marketplace are re-priced by secondary sellers and may be above or below face value."

To disable the explanation text altogether, pass in an empty string: `Seatics.config.faceValueHelpText = ""`;

example code:

```
<script>
  Seatics.config.displayFaceValuePreCheckout = true;
  Seatics.config.faceValueHelpText = "Face value
reflects the original price of the tickets. The price you'll
pay is the current market value, which may be above or below
face value.";
</script>
```

If you are using the single click to checkout configuration, a user may never see the face value information. To comply with Google's policies, you may need to update your configuration settings so that the user MUST view the ticket details screen before proceeding to checkout.

Tickets Packages Parking Passes > Filters (0) v

Second Mezzanine 406

Row K

2 Tickets

\$1,250/ea

Continue

Face value reflects the original price of the tickets. The price you'll pay is the current market value, which may be above or below face value.

Row E

2 Tickets

\$1,322/ea

Continue

Face Value: \$1,555

First Mezzanine 301

Row F

2 Tickets

\$1,475/ea

Continue

Important: Zone Seating

First Mezzanine 307

Row F

2 Tickets

\$1,475/ea

Continue

Important: Zone Seating

Second Mezzanine 403

Row K

2 Tickets

\$1,475/ea

Continue

Important: Zone Seating

Second Mezzanine 405

Row K

2 Tickets

\$1,475/ea

Continue

Important: Zone Seating

First Mezzanine 301

Row F

2 Tickets

\$1,522/ea

Continue

Face Value: \$1,790

Second Mezzanine 402

Face Value in the Main Ticket List

To enable the more visible face value display on the main ticket list, set `Seatics.config.displayFaceValueTicketList` to true.

As with the ticket details display, use `Seatics.config.faceValueHelpText` to edit the face value explanation. The default help text is: "This is the original ticket price, as set by the primary seller. Tickets sold through our marketplace are re-priced by secondary sellers and may be above or below face value."

To disable the explanation text altogether, pass in an empty string: `Seatics.config.faceValueHelpText = ""`;

example code:

```
<script>
  Seatics.config.displayFaceValueTicketList = true;
  Seatics.config.faceValueHelpText = "Face value
  reflects the original price of the tickets. The
  price you'll pay is the current market value, which
  may be above or below face value.";
</script>
```

UNKNOWN FACE VALUE

In the case where "face" data has not been provided on a real ticket (or has been set to 0), the site can choose whether to show anything for face value. By default, Maps will not display any face value information or help text for unknown face values.

In order to toggle on the 'unknown' face value display, use the `Seatics.config.displayFaceValueForUnknownValues` configuration setting.

When unknown face values are shown, Maps will display "No Face Price" in place of where the face price would normally go. Along with this will be help text explaining that the information was not disclosed the face value to the system. Improvements will be made as needed based on Google's future plans and communications about Reseller Certification.

Tic

✕

Lower 110

Row M

How many tickets?

<

1

2

3

4

5

>

Estimated Subtotal

(Qty) x \$27/ea

--

(Not including fees)

Checkout

Face Value

No Face Price ?

The seller has not provided the original price for these tickets. Tickets sold through our marketplace are re-priced by secondary sellers and may be above or below face value.

Delivery Method

Mobile Ticket

Additional Notes :

- Must have smart device on hand to enter event.

When face value is null or \$0, Mapwidget displays the value as "No Face Price".

Where face value is displayed as "No Face Price," use `Seatics.config.faceValueHelpAlternateText` to edit the face value explanation. The default language is: "The seller has not provided the original price for these tickets. Tickets sold through our marketplace are re-priced by secondary sellers and may be above or below face value."

To disable the explanation text altogether, pass in an empty string: `Seatics.config.faceValueHelpAlternateText = ""`;

example code:

```
<script>
    Seatics.config.displayFaceValuePreCheckout = true;
    Seatics.config.displayFaceValueForUnknownValues =
true;
    Seatics.config.faceValueHelpAlternateText = "The
seller has not supplied this data.";
</script>
```

FACE VALUE FOR SPECULATIVE TICKETS

The behavior for face value is different for speculative inventory because these do not represent a single, real ticket, and therefore cannot have a face value.

×

Orchestra Left

Row H

How many tickets?

1

2

Estimated Subtotal

2 x \$290/ea

\$580

(Not including fees)

Checkout

Face Value

Not Applicable ⓘ

Tickets sold through our marketplace are re-priced by secondary sellers and may be above or below face value.

Delivery Method ⓘ

eTickets ⓘ

Important: Zone Seating

The tickets you receive may be in the specific section listed here or in an equivalent or better location. This listing describes tickets that the seller does not own or may not know the exact location of the seats, but is offering to obtain for you. Once your order is

When a ticket is Speculative/Category inventory, Mapwidget displays the value as "Not Applicable"

The face value explanation for speculative inventory is: "Tickets sold through our marketplace are re-priced by secondary sellers and may be above or below face value."

This setting cannot currently be configured.

FACE VALUE DISPLAY CONFIGURATIONS

The following combinations of settings can be used to determine the visibility of face value data on your site:

	No face display	Display before checkout only (user might not view face)	Display before checkout only (user must view face)	Display on main page only (user must view face)	Display both places (user must view face at least once)	Display both places (user must view face twice)
Face Value Location	☐ Ticket List ☐ Ticket Details	☐ Ticket List ☒ Ticket Details	☐ Ticket List ☒ Ticket Details	☒ Ticket List ☐ Ticket Details	☒ Ticket List ☒ Ticket Details	☒ Ticket List ☒ Ticket Details
Ticket Details	☒ Must View OR ☒ Optional View	☒ Must View ☒ Optional View	☒ Must View ☒ Optional View	☒ Must View OR ☒ Optional View	☒ Must View ☒ Optional View	☒ Must View ☒ Optional View

CUSTOM GOOGLE RESELLER CERTIFICATION VIEW

In February 2018, Google began requiring event ticket sellers to obtain certification with them in order to advertise through Adwords. The first requirement to impact the Mapwidget UI was the inclusion and placement of ticket reseller disclosures in the small screen layout. Google says they will later require resellers to display the face value of tickets at some undetermined future date. Currently, compliance with Google's Reseller Certification requirements affects all site traffic, though the requirements are specific to Google pay-per-click traffic. Website owners have expressed an interest in creating a separate experience for Google PPC traffic so sites can adhere to Google's policies without drastically changing the customer experience for all marketing channels. Mapwidget provides a pair of configuration settings that will allow sites to auto-detect when the traffic source is from a Google PPC ad and render the desired Google-compliant Maps experience.

GOOGLE PPC AUTO-DETECTION

To enable Google PPC auto-detection, the site must add the following configuration parameter: `Seatics.config.googlePPCAutoDetect = true;` When enabled, Maps will use the following markers to identify Google PPC traffic:

1. The URL of the maps page contains the `gclid` parameter in the query string (`gclid` can have any value) OR
2. The browser has a cookie with the key `_gac_UA` (key can have any value) OR
3. The browser has a cookie with the key `_gcl_dc` (key can have any value).

If Maps determines the visitor was referred from a Google PPC ad, it will implement the site's Google Referral Settings, as explained in the next section.

GOOGLE REFERRAL SETTINGS

The `googleReferralSettings` configuration object contains a site's preferred Google Reseller Certification settings. Any of the following configuration parameters can be included:

```
enableHeaderLowerLegalDisclosureMobile
enableLegalDisclosureMobile
enableHeaderLegalDisclosureMobile
faceValueHelpText
faceValueHelpAlternateText
displayFaceValuePreCheckout
displayFaceValueTicketList
displayFaceValueForUnknownValues
```

These settings allow the site owner to specify:

- Whether or not the reseller disclosure should display on small screen devices, and where it should display when enabled
- Whether or not to enable face value display, and where that info should be surfaced when enabled
- Any customizations to face value explanation text, if applicable

For example, currently face value display is disabled for all sites, but the small screen reseller disclosure is enabled. If you want to display the disclosure only for Google PPC traffic and prefer placement between the header and the map, the following code should be added to the site's map settings:

```
Seatics.config.enableLegalDisclosureMobile = false;
Seatics.config.googlePPCAutoDetect = true;
Seatics.config.googleReferralSettings = {
    enableHeaderLowerLegalDisclosureMobile: true
};
```

The first line disables the default legal disclosure that automatically displays on all sites using Mapwidget.

The second line enables Google PPC auto-detect.

The remaining lines specify what the user experience should be for Google PPC traffic, in this case, the reseller disclosure between the event info area and the map. The result is that **only** Google PPC traffic will now see the reseller disclosure.

In the Maps Configuration Management Tool, a checkbox below the Mobile Reseller Disclosure settings allows you to easily enable Google PPC auto-detect and apply your Mobile Reseller Disclosure settings only to Google PPC traffic. Check the box to enable these settings:



The screenshot shows the 'Show Reseller Disclosure on Mobile' section with a checked checkbox. Below it are three radio button options: 'Above header', 'Below header', and 'Above ticket list', with 'Above ticket list' selected. The 'Mobile Disclosure Text' section has a 'Use Default' button and a 'Use Custom' button, with 'Use Custom' selected. A text area contains the following HTML code:

```
<div class="sea-list-disclosure-inner sea-list-marketing-inner">
  <span class="cm-info"></span>
  <span class="sea-list-marketing-label">Test sit are a resale marketplace, not the
venue. Prices are set by sellers and may be above or below face value.</span>
</div>
```

At the bottom, the 'Enable only for Google PPC traffic?' checkbox is unchecked.

BYPASSING AUTO-DETECT

If you want to have a website experience specific to Google PPC traffic but don't want to use the Mapwidget autodetection, the configuration `Seatics.config.isGooglePPCReferral` can be used instead with your own logic for determining traffic source.

ALL-IN PRICING / FEE DISPLAY


Sites that want to show ticket fees to the user within the Map (in addition the base price of the ticket) can use the various configuration options to control service fee display.

Please note, the Venue Map may automatically override some of these settings for certain users for compliance reasons.

Sites that do not want to show fees within the Map itself, but do want Checkout to show fees immediately to certain users (regardless of the normal Checkout behavior), can use the `Seatics.config.showFeesInCheckout` configuration option.

code snippet:

```
<script>
  Seatics.config.showAllInPricingToggle = false;
</script>
```

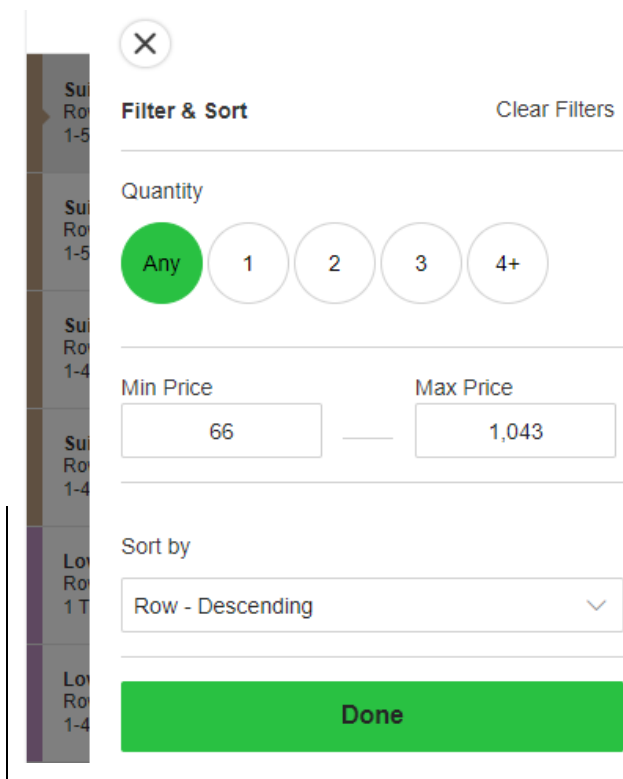

Use `Seatics.config.showAllInPricingToggle` to control whether the user is offered the option to toggle all-in pricing on and off within the filter card.

This setting is enabled by default. Set to `false` to hide this filter.

code snippet:

```
<script>
  Seatics.config.showAllInPricingToggle = false;
</script>
```

Suite A47

Row Peter Gunz VIP SRO

1-5 Tickets

Suite A47

Row Peter Gunz VIP Row 2

1-5 Tickets

Filter & Sort

Clear Filters

Quantity

Any

1

2

3

4+

Min Price

87

Max Price

1,388

Show prices with estimated fees

☒

Sort by

Row - Descending

Use `Seatics.config.includeServiceFeesInTicketPrice` to display fees immediately when the map is first rendered. This will also toggle the “Show prices with estimated fees” filtercard setting to the “on” position.

This setting is disabled by default. Set to `true` to automatically enable all-in pricing.

code snippet:

```
<script>
  Seatics.config.includeServiceFeesInTicketPrice =
  true;
</script>
```

Suite A47

Row Peter Gunz VIP SRO

1-5 Tickets

\$424.28/ea

Fees Included

Buy

Suite A47

Row Peter Gunz VIP Row 2

1-5 Tickets

\$605.15/ea

Fees Included

Buy

×

Suite A47

Row Peter Gunz VIP SRO

How many tickets?

<

1

2

3

4

5

>

Estimated Subtotal

1 x \$424.28/ea

\$424.28

Includes \$105.28 in estimated fees

Go To Secure Checkout

PRICE BREAKDOWNS

Sites also have the option of displaying a breakdown of which portion of the price is for tickets and which is for fees. This feature is split into two configurations, one for the main list and one for the pre-checkout.

Price breakdowns will only be shown when the map is using all-in pricing. I.E. When either the user has toggled on all-in pricing within the filter card, or the site has chosen to enable all-in pricing automatically.

Suite A47
Row Peter Gunz VIP SRO
1-5 Tickets 

\$424.28/ea
Ticket Price \$319 + Service Fee \$105.28 + Taxes if applicable

Buy

Suite A47
Row Peter Gunz VIP Row 2
1-5 Tickets 

\$605.15/ea
Ticket Price \$455 + Service Fee \$150.15 + Taxes if applicable

Buy

Use `Seatics.config.showPriceBreakdownTicketList` to enable price breakdowns within the main list.

This setting is disabled by default. Set to `true` to enable the breakdowns.

code snippet:

```
<script>
    Seatics.config.showPriceBreakdownTicketList = true;
</script>
```

How many tickets?

< **1** 2 3 4 5 >

Estimated Subtotal 1 x \$424.28/ea **\$424.28**
Ticket Price \$319 + Service Fee \$105.28 + Taxes if applicable

Go To Secure Checkout


Use `Seatics.config.showPriceBreakdownPrecheckout` to enable price breakdowns within the main list.

This setting is disabled by default. Set to `true` to enable the breakdowns.

code snippet:

```
<script>
    Seatics.config.showPriceBreakdownPrecheckout = true;
</script>
```

QUANTITY MODAL

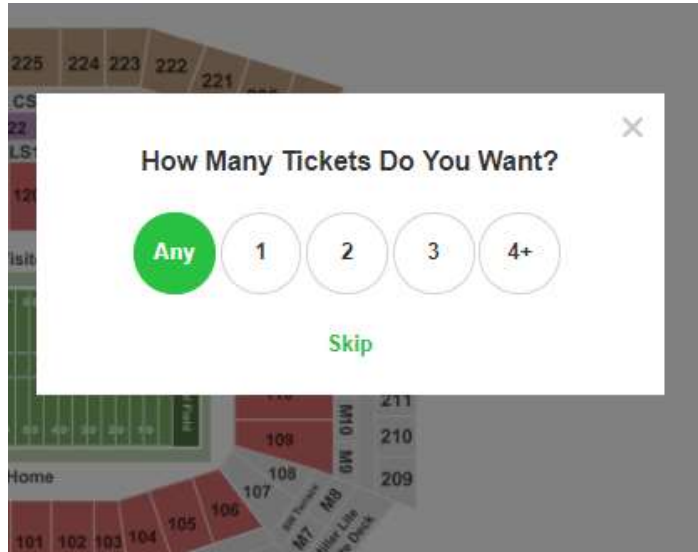

Use `Seatics.config.enableQuantityModal` to turn on the quantity modal feature, which prompts the user to select their ticket quantity when entering the maps page. The user has the option to skip this step or choose their quantity later.

This setting is disabled by default. Set to `true` to enable the modal.

code snippet:

```
<script>
  Seatics.config.enableQuantityModal = true;
</script>
```

This configuration can also be set from the General tab in Maps Configuration Management. Check the box to enable the feature:

Quantity Modal	
When on, the user will be prompted to select quantity upon entering the page	☐

FEEDBACK FEATURE

Feedback?

We appreciate your feedback. i

Questions, comments, concerns?

Include your e-mail address? (optional)

So we can send you a response.

By hitting Submit, you agree to our [Idea Submission Policy](#).

Cancel

Submit

Use `Seatics.config.enableFeedback` to enable or disable the feedback feature, which allows the user to submit comments, suggestions, and questions about the maps experience. Feedback is emailed to an internal TicketNetwork team. That group responds to user questions and forwards comments to the appropriate TicketNetwork departments.

This setting is enabled by default. Set to `false` to disable the feature.

code snippet:

```
<script>
  Seatics.config.enableFeedback = true;
</script>
```


This configuration can also be set from the General tab in Maps Configuration Management. Uncheck the box to disable the feature:

i **Feedback Button**

Collects user input about the maps

☒

CHECKOUT DEEP LINKING

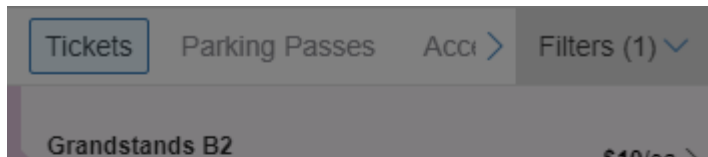

Just a moment

We're looking for your tickets...




Use `Seatics.config.enableCheckoutDeepLinking` to enable or disable the deep linking feature, which allows the map to automatically direct the user straight to checkout to purchase a pre-defined group of tickets. Deep linking is typically used in marketing programs like cart abandonment when the user has already decided which exact ticket they want.

We highly recommend taking advantage of it, as it increases cart abandonment conversion rates by a significant amount.

This setting is enabled by default. Set to `false` to disable the feature.

code snippet:

```
<script>
  Seatics.config.enableCheckoutDeepLinking =
  false;
</script>
```

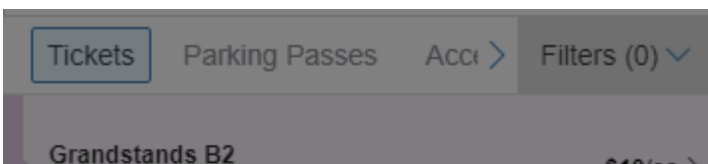

Just a moment Jane

We're looking for your tickets..




The deep link feature allows you to specify:

THE NAME OF THE CUSTOMER

This is used to personalize the messaging. If omitted, no personalization will occur.

By default customer name is pulled from the `cstnm` query string parameter of the page's URL. Use `Seatics.config.checkoutDeepLinkCustomerNameKey` to change which query string parameter is used.



We're sorry!

Those tickets are no longer available.

Please select new tickets



code snippet:

```
<script>
    Seatics.config.checkoutDeepLinkCustomerNameKey
= "name";
</script>
```

THE TICKET GROUP TO BUY


This should match the id of the tickets within the ticket data array.

Maps will check to make sure the tickets are still available before sending the user to checkout. If they are not, the user will see a message, and be prompted to pick new tickets.

By default ticket group id is pulled from the `tgid` query string parameter of the page's URL. Use `Seatics.config.checkoutDeepLinkTgIDKey` to change which query string parameter is used.

code snippet:


```
<script>
    Seatics.config.checkoutDeepLinkTgIDKey =
"ticket";
</script>
```



We're sorry!

You can no longer purchase 4 of these tickets.

Please select new tickets



Aw man!

The price of these tickets has gone up to \$64 from \$60.

That's cool, start my order

Never mind, I'll pick new tickets

THE QUANTITY OF TICKETS TO BUY

Maps will check to make sure this quantity is still available before sending the user to checkout. If it is not, the user will see a message, and be prompted to pick new tickets.

If omitted, the quantity availability check will be skipped, and the user will be sent to checkout with the default number of tickets for that group (usually 2).

By default quantity is pulled from the qty query string parameter of the page's URL. Use `Seatics.config.checkoutDeepLinkQuantityKey` to change which query string parameter is used.

code snippet:

```
<script>
    Seatics.config.checkoutDeepLinkQuantityKey =
    "quantity";
</script>
```

THE PRICE (EACH) THE USER EXPECT TO PAY FOR THE TICKETS

Maps will make sure the price of the tickets hasn't increased before sending the user to checkout. If it has, the user will see a message, and can either proceed to checkout anyway or pick new tickets.

If omitted, the price increase check will be skipped.

By default expected price (each) is pulled from the prc query string parameter of the page's URL. Use `Seatics.config.checkoutDeepLinkExpectedPriceKey` to change which query string parameter is used.

code snippet:

```
<script>
    Seatics.config.checkoutDeepLinkExpectedPriceKey
= "price";
</script>
```

This feature can also be configured from the General tab in Maps Configuration Management. Uncheck the box to disable the feature. Or set each parameter to 'Custom' and adjust the text in the field to change which query string parameter they are read from.

Example: <https://mysite.com/event/927771?tgid=112455&qty=3&prc=52&cstnm=Jane>

Deep Link to Checkout

Allows deep linking to checkout using query string parameters



Query String Key for tgID

Use Default ☒ Use Custom

Query String Key for quantity

Use Default ☒ Use Custom

Query String Key for expected price

Use Default ☒ Use Custom

Query String Key for customer name

Use Default ☒ Use Custom

MAP COLOR SCHEMES



Full Palette

Maps are colored by venue level. Large venues can use up to eighteen colors

code snippet:

```
<script>
    Seatics.config.levelColors =
["#d86f6f", "#e2a6a6", "#f4ad58", "#ffd797",
"#bc91c1", "#e5cae2", "#66b6dd", "#a3ddf8",
"#abcb59", "#d2e08b", "#bfa082", "#d9d7ba",
"#589caf", "#bcd3e7", "#fff871", "#fff7a9",
"#9bc9a2", "#c7ddc8"];
    Seatics.config.useSuperLevels = false;
</script>
```




Simplified Palette

Similar to Full Palette, but for complex venues like baseball stadiums, levels are grouped together into 'superlevels' to simplify the appearance of the map. This is the default color scheme.

code snippet:

```
<script>
    Seatics.config.levelColors =
["#d86f6f", "#e2a6a6", "#f4ad58", "#ffd797",
"#bc91c1", "#e5cae2", "#66b6dd", "#a3ddf8",
"#abcb59", "#d2e08b", "#bfa082", "#d9d7ba",
"#589caf", "#bcd3e7", "#fff871", "#fff7a9",
"#9bc9a2", "#c7ddc8"];
    Seatics.config.useSuperLevels = true;
</script>
```

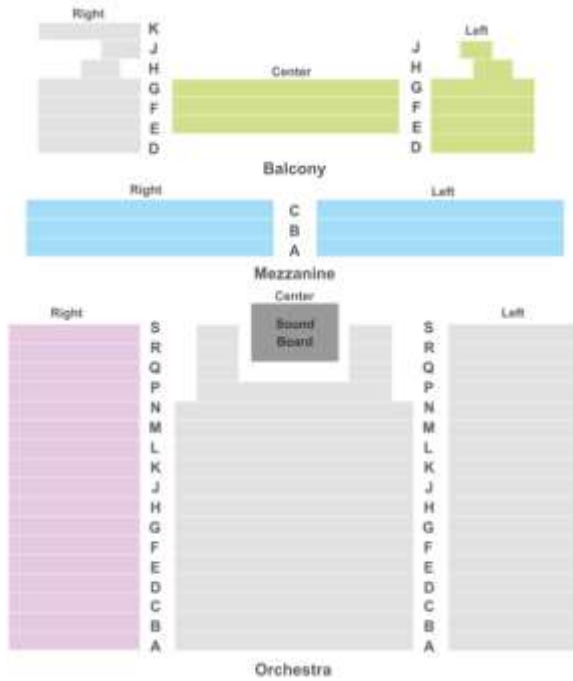

Small Palette

Small venues with three levels or less are configured separately and use a subset of the large color pallet.

code snippet:

```
<script>
    Seatics.config.levelColorsSmallVenue =
    ["#e5cae2", "#a3ddf8", "#d2e08b"];
</script>
```




Single Color

Sections with tickets available are colored and sections with no tickets available are grey. The color for sections with inventory available is configurable through use of the `Seatics.config.levelColors` property. Specify a single color instead of an array of colors.

code snippet:

```
<script>
    Seatics.config.levelColors =
["#66b6dd"];
</script>
```

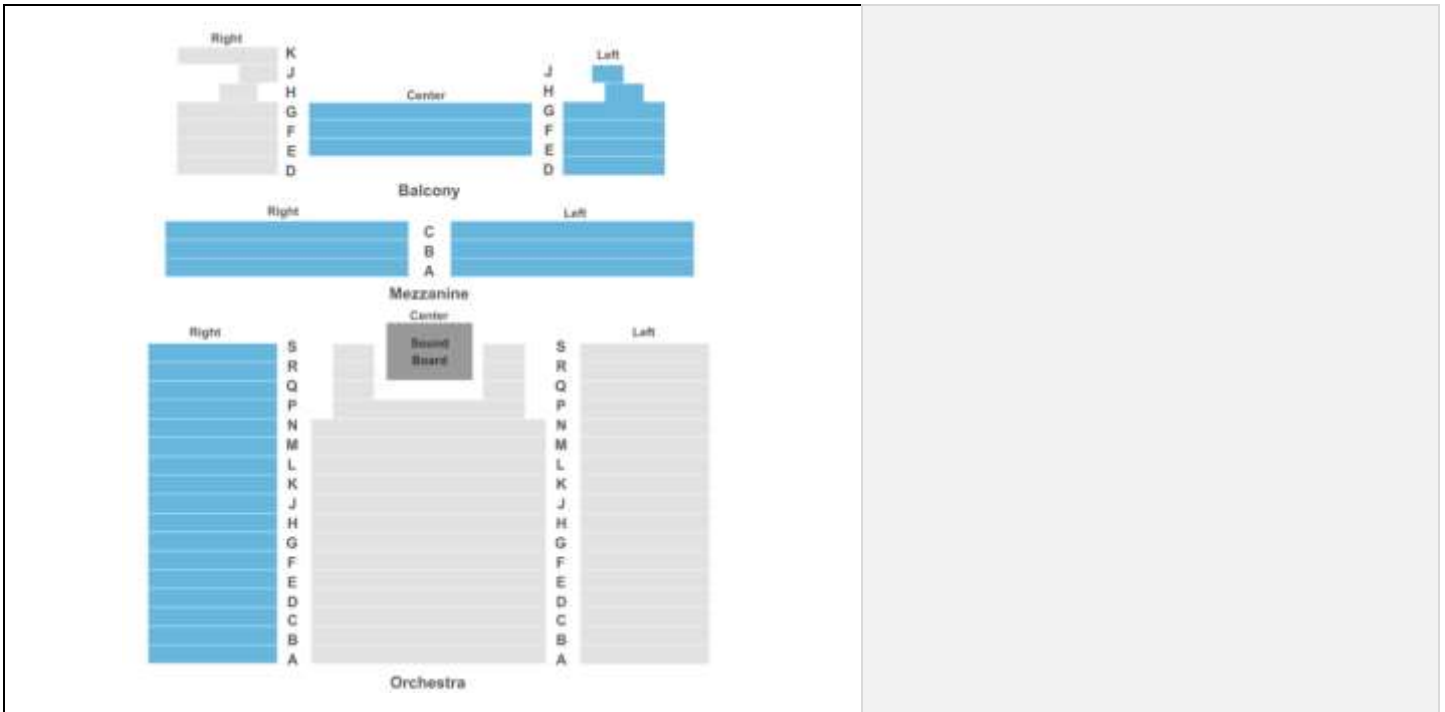

These configurations can also be set from the Venue tab in Maps Configuration Management:

Seating Chart Color Palette
Colors for sections with inventory

Use Default ☒ Use Custom

Section with No Available Tickets
Use Default ☒ Use Custom

Simplified Palette
Simplifies section groupings on complex maps


☒

Single Color Palette
Uses only the first color of the seating chart color palette

☐



Regular Map

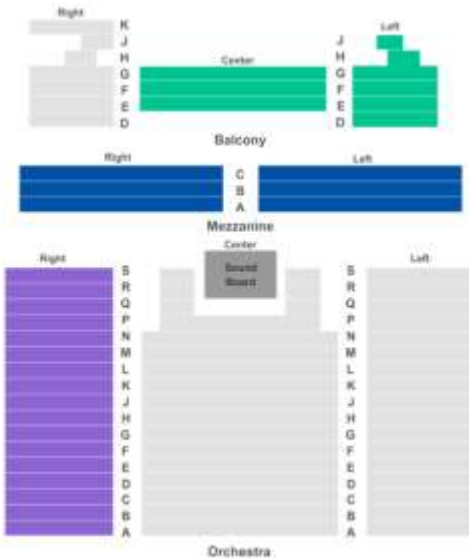

Small Map

Notes About the Color Palette

The maps color palette was carefully selected by our designer with warmer colors closer to the action and cooler colors as the seats get farther away. Choices were informed by color theory and accommodate colorblind users. If a site owner wants to use a different palette, however, that is possible by changing a couple configuration settings.


A new array of level colors can be specified with `Seatics.config.levelColors` and `Seatics.config.levelColorsSmallVenue`.

To update zone maps, the same palette must be specified with `Seatics.config.zoneColors`. Zone maps should always have a full color array specified, even if the site is using the single color scheme for non-zone maps.

To avoid repeating colors and creating customer confusion, it is imperative that enough colors are included in the array when changes are made to the full palette, simplified palette, or zone color scheme.

code snippet:

```
<script>
  Seatics.config.levelColors = ["#004159", "#65a8c4",
    "#aacee2", "#8c65d3", "#9a93ec", "#cab9f1", "#0052a5",
    "#413bf7", "#81cbf8", "#00adce", "#59dbf1", "#9ee7fa",
    "#00c590", "#73ebae", "#b5f9d3", "#846d74", "#b7a6ad",
    "#d3c9ce"];
  Seatics.config.levelColorsSmallVenue = ["#8c65d3",
    "#0052a5", "#00c590"];
  Seatics.config.zoneColors = ["#004159", "#65a8c4",
    "#aacee2", "#8c65d3", "#9a93ec", "#cab9f1", "#0052a5",
    "#413bf7", "#81cbf8", "#00adce", "#59dbf1", "#9ee7fa",
    "#00c590", "#73ebae", "#b5f9d3", "#846d74", "#b7a6ad",
    "#d3c9ce"];
</script>
```

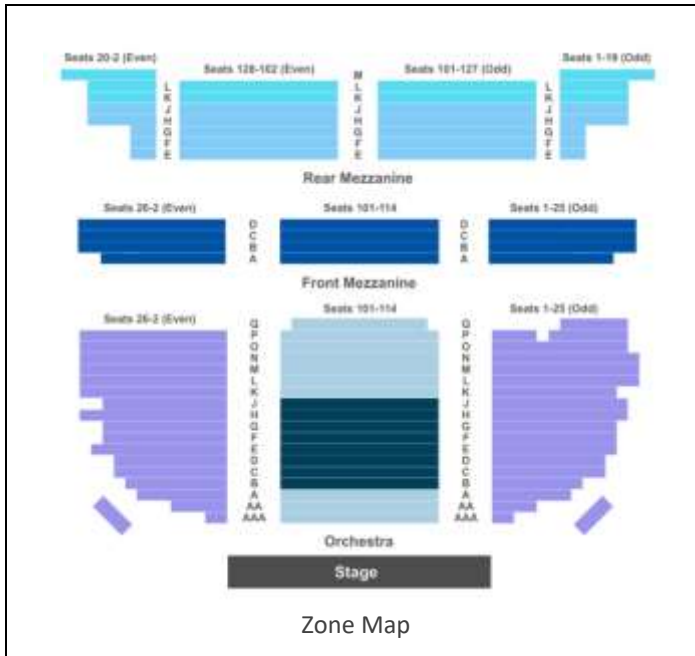

SECTION SELECTION SCHEMES



Scheme 0

When set to `Seatics.config.selectionScheme = 0`, selecting a section desaturates the colors of unselected sections. This is the default selection scheme.

code snippet:

```
<script>
    Seatics.config.selectionScheme = 0;
</script>
```




code snippet:



This can also be set through the Venue tab in Maps Configuration Management:



Fully Shown Map

code snippet:

v1.11 | TicketNetwork, Inc. © 2018-2023
Page 60 of 94

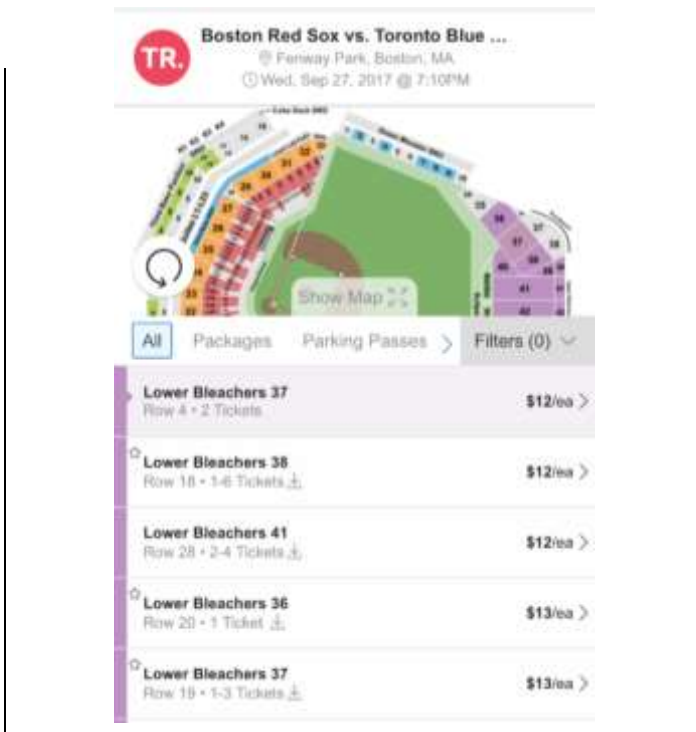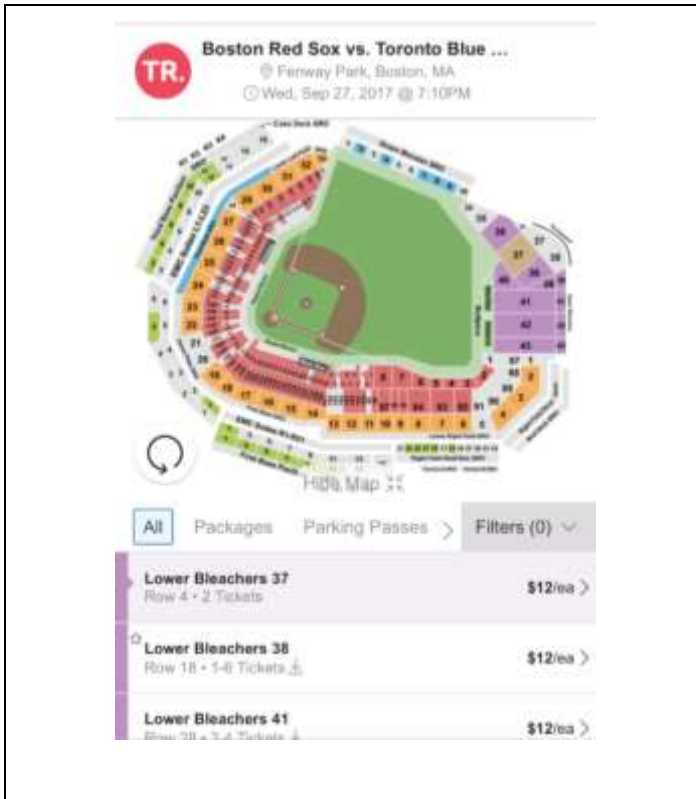

50% Map

When `Seatics.config.smallScreenMapLayout` is set to `Seatics.SmallScreenMapOptions.HalfShown`, half of the map is shown with the ability to expand the map area to reveal the full map.

code snippet:

```
<script>
    Seatics.config.smallScreenMapLayout =
    Seatics.SmallScreenMapOptions.HalfShown;
</script>
```

Mostly Hidden Map




When `Seatics.config.smallScreenMapLayout` is set to `Seatics.SmallScreenMapOptions.HiddenWithPreview`, a sliver of the map displays, allowing the user to know a map is available while giving more room for ticket groups. Tapping 'Show Venue Map' expands the region to reveal the full map.

This is the default setting.

code snippet:

```
<script>
  Seatics.config.smallScreenMapLayout =
  Seatics.SmallScreenMapOptions.HiddenWithPreview;
</script>
```

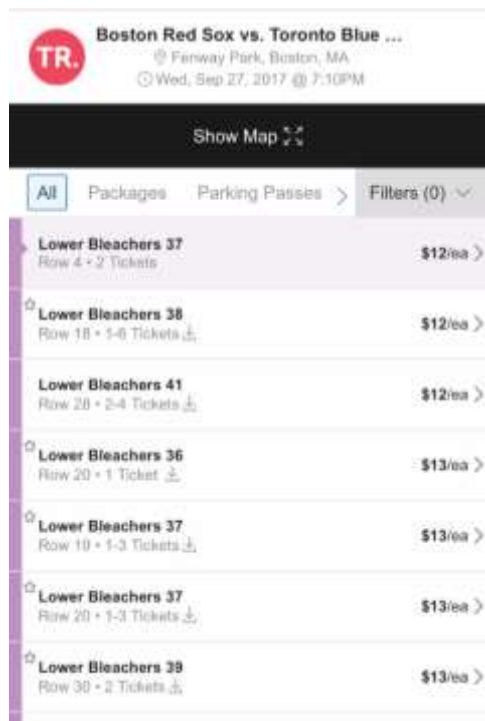

Fully Hidden Map

When `Seatics.config.smallScreenMapLayout` is set to `Seatics.SmallScreenMapOptions.FullyHidden`, no part of the map shows at all, giving maximum focus to the ticket groups. Tapping 'Show Venue Map' expands the region to reveal the full map.

code snippet:

```
<script>
  Seatics.config.smallScreenMapLayout =
  Seatics.SmallScreenMapOptions.FullyHidden;
</script>
```

This configuration can also be set through the Venue tab in Maps Configuration Management:

 **Maps Display on Mobile**
How much of the map is visible on page load

☐ Fully Shown
☐ Half Shown
☒ Hidden with Preview
☐ Fully Hidden

SCROLL TO ZOOM

Some site owners prefer to allow users to scroll their mouse wheels to zoom the map. Others find this scroll to zoom functionality 'hijacks' the page scroll. By default scroll to zoom is disabled. However, if a site owner would like to enable this feature, it can be toggled on by setting `Seatics.config.mouseWheelZoomEnabled` to `true`.

code snippet:

```
<script>  
  Seatics.config.mouseWheelZoomEnabled = true;  
</script>
```

This configuration can also be set through the Venue tab in Maps Configuration Management. Check the box to enable scroll to zoom:

 **Zoom with Mouse Wheel**
When on, users can zoom the map by scrolling the mouse wheel

☐

ZOOM CONTROLS



Use `Seatics.config.showZoomControls` to enable plus and minus buttons users can tap to zoom on mobile devices. By default the controls are not displayed on the stacked layout. Pinch to zoom is supported whether or not zoom controls are displayed.

Please note that if you set this to `false`, it will hide the zoom controls on desktop. To hide the controls on small screen but have them visible on large screen, do not explicitly set this parameter.

code snippet:

```
<script>
  Seatics.config.showZoomControls = true;
</script>
```

This configuration can also be set through the Venue tab in Maps Configuration Management. Check the box to display plus and minus zoom controls on mobile:

Show Zoom Controls on Mobile
Adds plus and minus controls to mobile



MAP CONTAINER



mapContained = true



mapContained = false

Seatics.config.mapContained supports two configurations.

The first is the 'traditional' configuration where the map is wrapped in its own container to free up the surrounding area for customization and branding.

The second option is the 'modern' configuration where the page is streamlined and the focus is on the map, which functions as if it is the background on the page. By default, the map is not contained.

code snippet:

```
<script>
    Seatics.config.mapContained = true;
</script>
```

This configuration can also be set through the Venue tab in Maps Configuration Management. Check the box to restrict the map from zooming or panning outside its container. It's recommended to enable this if your maps page has a footer:

i
Map Contained

☐

When on, the map will not overflow the container

LEGEND DISPLAY

There are several options for the display of the map legend on the large screen layout. These can be configured through the Venue tab in Maps Configuration Management:

☒ Large Screen Legend Display
 ☒ Dropdown style

Legend expanded:
 ☐

☐ Checkbox style

Show legend first on mobile:
 ☐

When on, the user is asked to select levels/zones before viewing the ticket list

Or through code:



`Seatics.config.legendExpanded` specifies how the default map legend should display on page load. The legend is collapsed by default. Set to true to display the legend expanded.

code snippet:

```
<script>
  Seatics.config.legendExpanded = true;
</script>
```


ALTERNATE LEGEND PRESENTATION



The default presentation of the legend keeps it out of the way so the map takes focus. On the large screen layout, the legend can be configured to be expanded on page load; however, it may cover part of the map. Another option for those that want the legend always visible is an alternate presentation below the map. Set `legendDriven` to true to enable the ever-present legend.

To encourage customers to use the map on small screen devices to narrow down purchase options before viewing the ticket list, you can pair `Seatics.SmallScreenMapOptions.FullyShown`, (displays the full map on mobile) with `showLegendFirstOnMob` to display the legend on page load. Once the user taps into the ticket list, the legend options are available from the filter menu.

Please note that you must set both `legendDriven` and `showLegendFirstOnMob` to enable the alternate legend display on small screen devices. Setting only `legendDriven` will enable the alternate presentation just for the large screen layout.

code snippet:

```
<script>
  Seatics.config.ticketsState = {
    legendDriven: true,
    showLegendFirstOnMob:true};
  Seatics.config.smallScreenMapLayout =
    Seatics.SmallScreenMapOptions.FullyShown;
</script>
```

TICKETRIGHT.
CONCERTS ▾
SPORTS ▾
THEATER ▾




SAT
Sep 9
7:10PM

Boston Red Sox vs. Tampa Bay ...
Fenway Park, Boston, MA

100% Worry-Free Guarantee

- We are a resale marketplace, not the ticket seller.
- Prices are set by third-party sellers and may be above or below face value.
- Your seats are together unless otherwise noted.

All Packages Parking Passes > Filters (0) ▾

Upper Bleachers 38		\$30/ea	Buy
Row 34		\$32	
Upper Bleachers 38		\$31/ea	Buy
Row 38		\$33	
Upper Bleachers 43		\$31/ea	Buy
Row 47		\$34	
Upper Bleachers 38		\$32/ea	Buy
Row 34		\$35	
Lower Bleachers 37		\$33/ea	Buy
Row 20		\$36	
Upper Bleachers 37		\$35/ea	Buy
Row 36		\$39	
Lower Bleachers 37		\$36/ea	Buy
Row 36		\$39	



Boxes \$51+

Grandstand \$41+

Bleachers \$30+

Green Monster and SRO \$290+

Pavilion, Decks, Roof Box and SRO \$70+

code snippet:

```

<script>
    Seatics.config.ticketsState = {
        legendDriven: true
    };
</script>

```

LARGE SCREEN MAPS PLACEMENT




Seatics.config.ticketListOnRight is used to specify whether the ticket list should appear on the left or right side of the page. By default the ticket list is on the right and the map is on the left. Setting the configuration parameter to false puts the ticket list on the left and the map on the right.


code snippet:

```
<script>
    Seatics.config.ticketListOnRight =
    false;
</script>
```

This configuration can also be set through the Venue tab in Maps Configuration Management:



CTA BEHAVIOR ON MOBILE

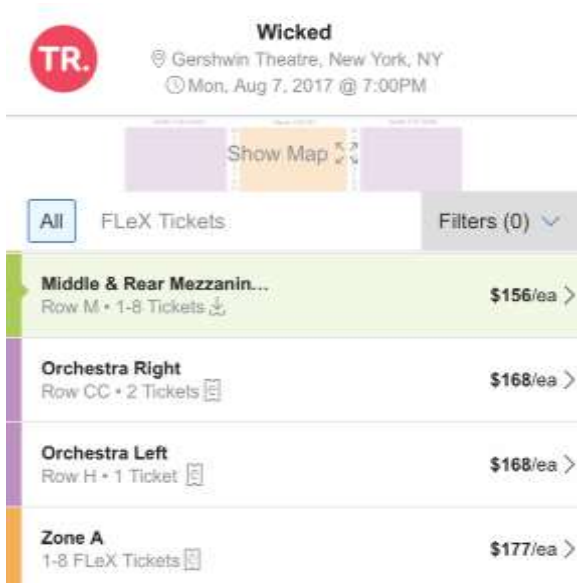


Two Clicks to Checkout

The two click configuration requires the user to view additional ticket details in a pre-checkout interstitial before proceeding to make a purchase.

This is the default behavior.

code snippet:

```
<script>
    Seatics.config.skipPrecheckoutMobile = false;
</script>
```

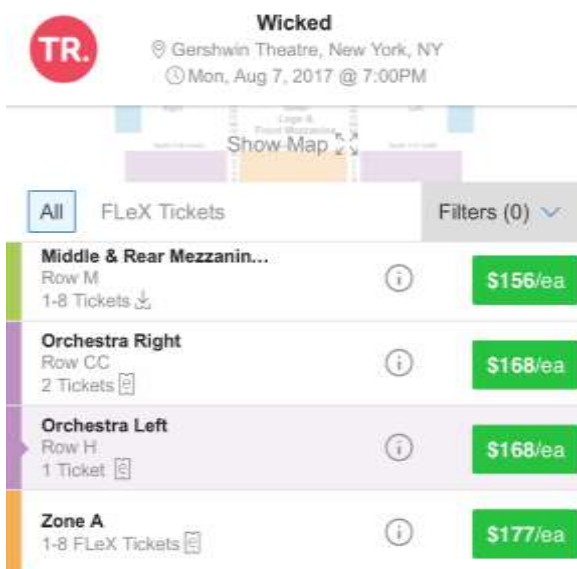

Single Click to Checkout

Set `Seatics.config.skipPrecheckoutMobile` to `true` to make it optional for the user to view the additional ticket information. The CTA is given stronger visual emphasis and takes the user directly to checkout. Tapping elsewhere in the row opens the additional ticket group details.

code snippet:

```
<script>
    Seatics.config.skipPrecheckoutMobile = true;
</script>
```

This configuration can also be set through the Ticket List tab in Maps Configuration Management:

☒ Single Click Checkout on Mobile



CTA BEHAVIOR ON LARGE SCREEN

All	Packages	Parking Passes	A >	Filters (0) v
Promenade Reserved 524	Row 15 • 2 Tickets	\$70/ea	>	
Promenade Reserved 528	Row 14 • 2 Tickets	\$77/ea	>	
☆ Promenade Reserved In...	Row 10 • 2 Tickets	\$78/ea	>	
Promenade Reserved 528	Row 13 • 2 Tickets	\$81/ea	>	
Promenade Reserved In...	Row 14 • 2 Tickets	\$83/ea	>	
Promenade Reserved 502	Row 16 • 2 Tickets	\$84/ea	>	
☆ Promenade Reserved 503	Row 12 • 1-8 Tickets	\$85/ea	>	

Two Clicks to Checkout

The two click configuration requires the user to view additional ticket details in an expanded ticket group before proceeding to make a purchase.

This is the default behavior.

code snippet:

```
<script>
    Seatics.config.skipPrecheckoutDesktop = false;
</script>
```

All	Packages	Parking Passes	A >	Filters (0) v
Promenade Reserved 524	Row 15 2 Tickets	\$70/ea		
Promenade Reserved 528	Row 14 2 Tickets	\$77/ea		
☆ Promenade Reserved In...	Row 10 2 Tickets	\$78/ea		
Promenade Reserved 528	Row 13 2 Tickets	\$81/ea		
Promenade Reserved In...	Row 14 2 Tickets	\$83/ea		
Promenade Reserved 502	Row 16 2 Tickets	\$84/ea		

Single Click to Checkout

Set `Seatics.config.skipPrecheckoutDesktop` to true to make it optional for the user to view the additional ticket information. The CTA is given stronger visual emphasis and takes the user directly to checkout. Tapping or clicking elsewhere in the row opens the additional ticket group details.

code snippet:

```
<script>
    Seatics.config.skipPrecheckoutDesktop = true;
</script>
```


This configuration can also be set through the Ticket List tab in Maps Configuration Management:


Single Click Checkout on Large Screen



Specifying a “trigger” element within buyButtonContentHtml

If you are using the single click to checkout configuration (`Seatics.config.skipPrecheckoutDesktop = true;`) and overriding the buy button html (`Seatics.config.buyButtonContentHtml`), you can add a class ‘venue-ticket-list-checkout-trigger-js’ to your buy button html. With this class is included, only clicks on the element with that class will result in the user going to checkout. If the ‘venue-ticket-list-checkout-trigger-js’ class is not provided, any click within the CTA table cell (`<td class="venue-ticket-list-cta-js venue-ticket-list-cta-col">`) will cause the user to go to checkout.

FORCED QUANTITY SELECTION

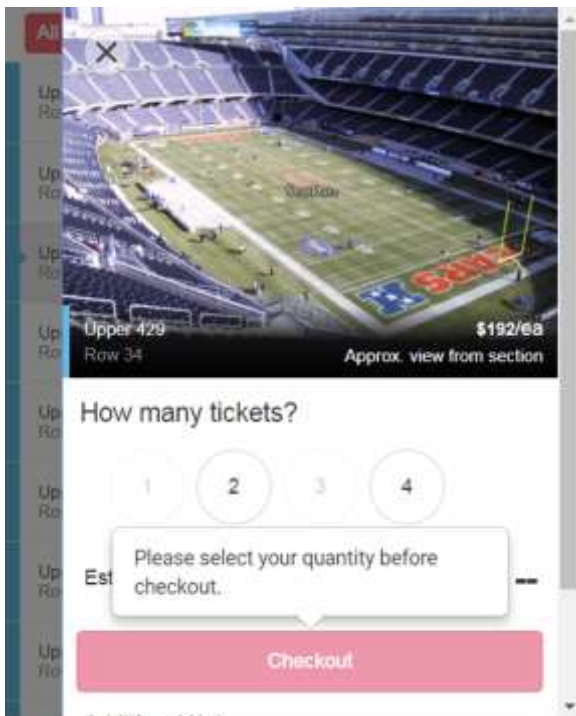

Use `Seatics.config.disableBuyButtonNoQuantitySelection` to force the user to choose a ticket quantity before starting checkout. When set to true, the CTA button in the pre-checkout screen will be inactive until the user specifies the ticket quantity desired. Clicking the CTA button without selecting ticket quantity pops up a tooltip.

This setting should be paired with the two clicks to checkout configuration.

code snippet:

```
<script>
    Seatics.config.disableBuyButtonNoQuantitySelection =
    true;
</script>
```

CTA IN THE TICKET GROUP ROW

All	Packages	Parking Passes	Filters (0)
★ Lower Bleachers 38	Row 18 • 1-6 Tickets	\$12/ea	Buy
★ Lower Bleachers 41	Row 26 • 2-4 Tickets	\$12/ea	Buy
★ Lower Bleachers 36	Row 20 • 1 Ticket	\$13/ea	Buy
★ Lower Bleachers 37	Row 19 • 1-3 Tickets	\$13/ea	Buy
★ Lower Bleachers 37	Row 20 • 1-3 Tickets	\$13/ea	Buy
★ Lower Bleachers 39		\$13/ea	Buy

Use `Seatics.config.buyButtonContentHtml` to customize the content of the call to action. This parameter injects a text or HTML string into the button tag. Use the dynamic key `{{Price}}` to include the price per ticket.

If the CTA is altered not to include the price, the price will appear to the left of the CTA.

code snippet:

```
<script>
  Seatics.config.buyButtonContentHtml = '<div
    style="background:#33CC33; color:#ffffff; padding: 8px 5px;
    font-weight:bold; margin-right:5px;">Buy</div>';
</script>
```

This configuration can also be set through the Ticket List tab in Maps Configuration Management:

ⓘ **TG List CTA Button**
Buy button configuration

Use Default ☒ Use Custom

FEATURED INVENTORY DISPLAY

Quantity	Price Range	More Options	
Any Quantity	\$61 - \$17,492		
Sort by Price - Low to High			
✱400s Level 404 Row 27 • 2 eTickets	\$61/ea \$67	Buy	
✱400s Level 420 Row 26 • 2 eTickets	\$61/ea \$67	Buy	
✱400s Level 401 Row 27 • 2 eTickets	\$63/ea \$69	Buy	
✱400s Level 401 Row 27 • 2 eTickets	\$63/ea \$69	Buy	
✱400s Level 402 Row 27 • 2 eTickets	\$63/ea \$69	Buy	
✱400s Level 404 Row 26 • 2 eTickets	\$63/ea \$70	Buy	

If the site marks tickets, `Seatics.config.tgMarkHtml` and `Seatics.config.tgMarkTooltipText` can be used to customize the display. `Seatics.config.tgMarkHtml` specifies the symbol, character, or image the site will use to mark featured inventory. The HTML entered for this configuration parameter will be inserted into the mark column of a marked ticket group. The default mark is ✱.

`Seatics.config.tgMarkTooltipText` is used to customize the text that explains what the mark means. There is a limit of 100 characters (including spaces) for this text. The default text is "We recommend this seller's tickets."

example code:

```
<script>
  Seatics.config.tgMarkHtml = '<span style="vertical-align:middle; padding-left:2px;">&malt;</span>',
  Seatics.config.tgMarkTooltipText = 'These tickets are featured as a great value.';
</script>
```

These configurations can also be set through the Ticket List tab in Maps Configuration Management:

Featured Inventory Display

Use Default
Use Custom

Symbol used to mark featured inventory in the ticket list

Use Default
Use Custom

We recommend this seller's tickets.

Tooltip text that displays when a user hovers over the symbol

UNMAPPED INVENTORY DISPLAY

Unmapped inventory may include any of the below ticket types. `Seatics.config.ticketSeparationOptions` gives the site the ability to choose how to handle each type. The "Integrate" option merges the unmapped inventory into the main ticket list. The "Separate" option groups unmapped inventory into segments at the bottom of the main ticket list.

TG Type	TG Type Description	Event Access	Default Setting
1, 2	Unmapped event tickets or suites	Yes	unmappedStandard: <code>Seatics.TicketGroupSeparationOptions.Separate</code> Grouped under heading: Other Offers
1	Unmapped FLeX tickets or other multi-section/row listings	Yes	unmappedFlex: <code>Seatics.TicketGroupSeparationOptions.Integrate</code>
3	Parking	No	parking: <code>Seatics.TicketGroupSeparationOptions.Separate</code> Grouped under heading: Parking Passes (Not valid for entry to event)
4	Hotels	No	hotels: <code>Seatics.TicketGroupSeparationOptions.Separate</code> Grouped under heading: Hotel Deals (Not valid for entry to event)
5	Packages	Yes	packages: <code>Seatics.TicketGroupSeparationOptions.Integrate</code>
6-10	Passes (Backstage Passes, Pit Passes, VIP Passes, Meet/Greet Passes, Other Passes)	No	passes: <code>Seatics.TicketGroupSeparationOptions.Separate</code> Grouped under heading: Special Access Passes (Not valid for entry to event)

Some Unmapped Inventory configuration options:

PARKING Row PASS + 1-5 Parking Passes	\$10/ea >
Zone E 1-6 FLeX Tickets	\$11/ea >
Lower 27 Row R + 1-8 Instant Download	\$14/ea >
Upper End Zone 1-6 FLeX Tickets	\$18/ea >
Zone D 1-6 FLeX Tickets	\$28/ea >
Zone C 1-6 FLeX Tickets	\$55/ea >
Lower 16 Row K + 1-8 Tickets	\$66/ea >
1 Row B + 2-4 VIP Passes	\$220/ea >
BACKSTAGE Row PASS + 2-4 Backstage Passes	\$303/ea >
VIP Row PACKAGE + 1-7 Ticket Packages	\$385/ea >
VIP Row PASS + 1-15 VIP Passes	\$468/ea >

All Unmapped Inventory Integrated

Zone E 1-6 FLeX Tickets	\$11/ea >
Lower 27 Row R + 1-8 Instant Download	\$14/ea >
Zone D 1-6 FLeX Tickets	\$28/ea >
Zone C 1-6 FLeX Tickets	\$55/ea >
Lower 16 Row K + 1-8 Tickets	\$66/ea >
Ticket Packages	
VIP Row PACKAGE + 1-7 Ticket Packages	\$385/ea >
Parking Passes (Not valid for entry to event)	
PARKING Row PASS + 1-5 Parking Passes	\$10/ea >
Special Access Passes (Not valid for entry to event)	
1 Row B + 2-4 VIP Passes	\$220/ea >
BACKSTAGE Row PASS + 2-4 Backstage Passes	\$303/ea >
VIP Row PASS + 1-15 VIP Passes	\$468/ea >

All Unmapped Inventory Separated

code snippet:

```
<script>
  Seatics.config.ticketSeparationOptions = {
    packages: Seatics.TicketGroupSeparationOptions.Separate,
    parking: Seatics.TicketGroupSeparationOptions.Separate,
    passes: Seatics.TicketGroupSeparationOptions.Separate,
    hotels: Seatics.TicketGroupSeparationOptions.Separate,
    unmappedFlex: Seatics.TicketGroupSeparationOptions.Separate,
    unmappedStandard: Seatics.TicketGroupSeparationOptions.Separate
  };
</script>
```

These configurations can also be set through the Ticket List tab in Maps Configuration Management:

Unmapped Inventory Display Mix unmapped inventory into the main list or group it at the bottom of the list	Unmapped event/suite ☐ Integrate ☒ Separate Parking ☐ Integrate ☒ Separate Packages ☒ Integrate ☐ Separate	Unmapped FLeX/cats ☒ Integrate ☐ Separate Hotels ☐ Integrate ☒ Separate Special Access Passes ☐ Integrate ☒ Separate
---	---	---

QUANTITY DISPLAY

Infield Grandstand 29 Row 78 1-24 or 26 Tickets	\$37/ea
Field Box B69 Row 62 1-27 or 29 Tickets	\$38/ea
Field Box B82 Row 87 1-25 or 27 Tickets	\$39/ea
Infield Grandstand 31 Row 72 1-12 or 14 Tickets	\$39/ea

In user testing we found that when retail customers filtered the ticket list by quantity, they preferred the quantity line to update to show that desired quantity. However, the `alwaysShowAvailQty` setting allows a site to always show the total available quantity of tickets, if desired.

code snippet:

```
<script>
    Seatics.config.alwaysShowAvailQty = true;
</script>
```

This configuration can also be set through the Ticket List tab in Maps Configuration Management:

☒ **Quantity Display**
How to display quantity available when filter is applied
 ☒ **Filtered quantity**
☐ **Total available**

PRICE DISPLAY

All	FLeX Tickets	Filters (0) ▼
☐	Orchestra Left Row H • 1 Ticket	\$168.00/ea >
☐	Zone A 1-8 FLeX Tickets	\$177.00/ea >
☐	Zone C 1-8 FLeX Tickets	\$180.00/ea >

If you wish to display prices as decimals instead of whole numbers, set `Seatics.config.showCents` to true to show dollars and cents.

code snippet:

```
<script>
    Seatics.config.showCents = true;
</script>
```

This configuration can also be set through the Ticket List tab in Maps Configuration Management:

☒ Price Display
 ☒ Whole dollars
 ☐ Show cents

ENABLING MY LIST

Add up to 10 tickets to My List to compare them
Got it

Filters (0)

☐	Orchestra Left Row K • 1-3 Tickets	\$132/ea
☐	Orchestra Center Row Y • 1-11 Tickets	\$135/ea
☐	Orchestra Center Row X • 1-14 Tickets	\$144/ea
☐	Zone D 1-8 FLeX Tickets	\$145/ea
☐	Zone B 1-8 FLeX Tickets	\$152/ea
☐	Orchestra Center Row W • 1-16 Tickets	\$153/ea

The 'My List' feature allows users to check off and compare ticket groups on mobile and desktop. By default, this feature is disabled on all sites using the MapWidget.

If you wish to have My List enabled on your site, set `Seatics.config.enableMyList` to true.

Please note that the feature does not appear in the mobile landscape layout whether or not the feature is enabled.

code snippet:


```
<script>
  Seatics.config.enableMyList = true;
</script>
```

This configuration can also be set through the Ticket List tab in Maps Configuration Management:

☒ MyList Feature
 ☐

When enabled, users are able to save and compare ticket groups

PRE-CHECKOUT SCREEN CUSTOMIZATION

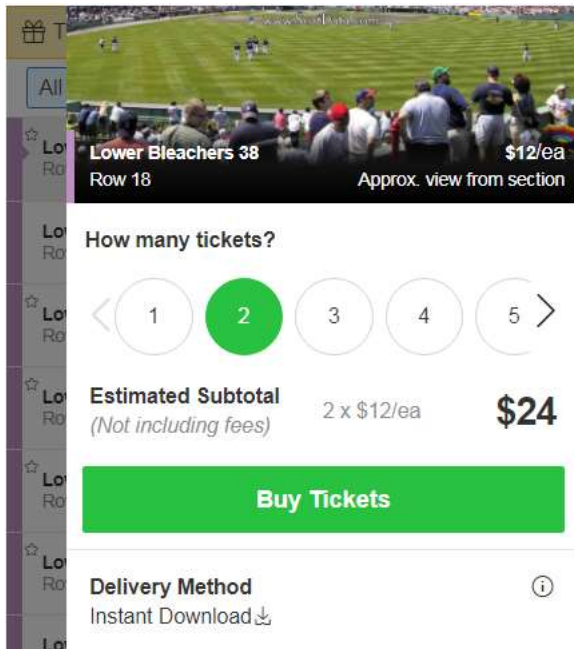


Use `Seatics.config.preCheckoutButtonHtml` to customize the content of the call to action button in the pre-checkout interstitial. This parameter injects a text or HTML string into the button tag.

This button appears only when there are two clicks to checkout, meaning `Seatics.config.skipPrecheckout` is false.

Default text is "Go to Secure Checkout."

code snippet:

```
<script>
    Seatics.config.preCheckoutButtonHtml = 'Buy
    Tickets';
</script>
```

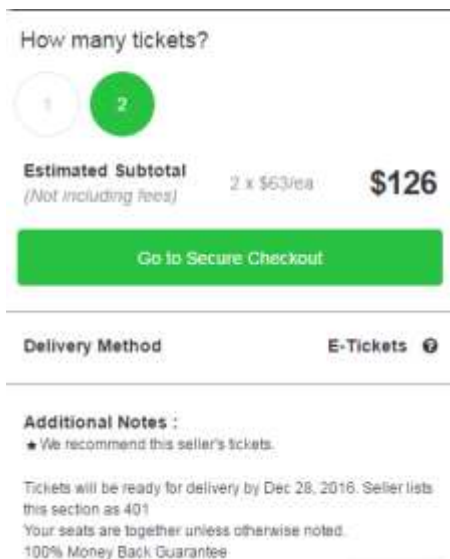

In addition to having customization options for the pre-checkout CTA button, there is a `tgGuaranteeNoteHtml` setting which allows you to edit the guarantee note in the pre-checkout interstitial. The parameter injects a text or HTML string into the notes field.

Default text is "100% Worry-Free Guarantee."

code snippet:

```
<script>
    Seatics.config.tgGuaranteeNoteHtml = '100% Money
    Back Guarantee';
</script>
```

These configurations can also be set through the Ticket List tab in Maps Configuration Management. Simply replace the default text with the desired text:

Precheckout Button Text Buy button configuration	Go to Secure Checkout
Precheckout Guarantee Note Text	100% Worry-Free Guarantee

DEFAULT SORT

All		FLeX Tickets		Filters (0) ▾	
☆	Orchestra Center	Row D 2-4 Tickets	 \$329/ea \$365	Buy	
☆	Orchestra Center	Row D 1 Ticket	 \$329/ea \$365	Buy	
☆	Orchestra Center	Row D 2 Tickets	 \$329/ea \$365	Buy	
☆	Orchestra Center	Row D 1-3 Tickets	 \$329/ea \$365	Buy	
	Orchestra Left	Row K 1-3 Tickets 	 \$135/ea \$149	Buy	
	Zone D	1-8 FLeX Tickets 	 \$147/ea \$163	Buy	
	Zone B	1-8 FLeX Tickets 	 \$154/ea \$171	Buy	

Use `Seatics.config.defaultSort` to specify how ticket groups are to be sorted on page load. The default setting is `Seatics.SortOptions.PriceAsc`, which sorts inventory by price from low to high. Other options:

`Seatics.SortOptions.PriceDesc` (Price – High to Low)
`Seatics.SortOptions.SectionAsc` (Section – Ascending)
`Seatics.SortOptions.SectionDesc` (Section – Descending)
`Seatics.SortOptions.Marked` (Featured Tickets – Show first)

code snippet:

```
<script>
  Seatics.config.defaultSort =
  Seatics.SortOptions.Marked;
</script>
```

This configuration can also be set through the Filters tab in Maps Configuration Management:

Default Sort How inventory is sorted on page load	☒ Price Ascending ☐ Price Descending ☐ Section Ascending ☐ Section Descending ☐ Show Featured Tickets First
---	--


SAVING FILTER SETTINGS

Often users may bounce back and forth between the ticket results page and checkout a few times before making a purchase. To prevent the frustration of having to reset their filter options every time they return to the map, we save the filter settings so the page will appear as the user left it. The filter settings will also persist when the user refreshes the page. If a site owner would like to disable this feature, it can be toggled off by setting `Seatics.config.saveFilterOptions` to `false`.


code snippet:

```
<script>
    Seatics.config.saveFilterOptions = false;
</script>
```

This configuration can also be set through the Filters tab in Maps Configuration Management:



LOCAL PICKUP FILTER

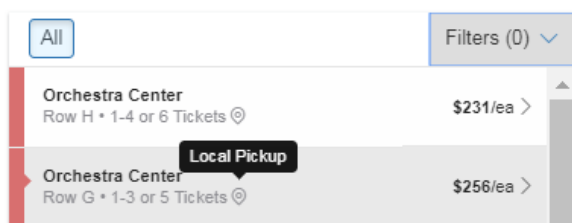

Use `Seatics.config.showLocalPickupFilter` to enable delivery icons and filtering for Local Pickup tickets. Local Pickup includes tickets with the delivery methods Will Call, Local Pickup Near Venue, and Last Minute Pickup.

This option is disabled by default. Set to `true` to enable it.

Min Price — Max Price

Electronic Delivery ☐

Local Pickup ☐

Done

code snippet:

```
<script>
    Seatics.config.showLocalPickupFilter = true;
</script>
```

PACKAGES MARKETING

To give ticket package offers more visibility, marketing banners were created that act as filters to isolate this premium inventory. There are several options for the display of the banners. These can be configured through the Filters tab in Maps Configuration Management:

1
Map Area Packages Banner (large screen)

☐

1
HTML when filter is off:

Use Default
☒
Use Custom

```

<span class="see-marketing-header-gift cm-package"></span>
<div id="see-map-marketing-close" class="see-marketing-header-close cm-close"></div>
<span class="see-marketing-header-label">Ticket Packages</span>
<span class="see-marketing-header-label-show">Show</span>

```

1
HTML when filter is on:

Use Default
☒
Use Custom

```

<span class="see-marketing-header-gift cm-package"></span>
<div id="see-map-marketing-close" class="see-marketing-header-close cm-close"></div>
<span class="see-marketing-header-label">Ticket Packages</span>
<span class="see-marketing-header-label-show">Hide</span>

```

1
Event Info Area Packages Banner (large screen)

☒

1
HTML when filter is off:

Use Default
☒
Use Custom

```

<span class="see-marketing-header-gift cm-package"></span>
<div id="see-map-marketing-close" class="see-marketing-header-close cm-close"></div>
<span class="see-marketing-header-label">Ticket Packages</span>
<span class="see-marketing-header-label-show">Show</span>

```

1
HTML when filter is on:

Use Default
☒
Use Custom

```

<span class="see-marketing-header-gift cm-package"></span>
<div id="see-map-marketing-close" class="see-marketing-header-close cm-close"></div>
<span class="see-marketing-header-label">Ticket Packages</span>
<span class="see-marketing-header-label-show">Hide</span>

```

Ticket List Packages Banner (large screen)

☐

Ticket List Packages Banner (mobile)

☐

HTML when filter is off:

Use Default

☒ Use Custom

```

<div class="sea-list-marketing-inner">
  <span class="cm-package"></span>
  <span class="sea-list-marketing-label" id="sea-list-marketing-label">Ticket Packages Available</span>
  <span class="sea-list-marketing-action-label" id="sea-list-marketing-action-label">Show Packages</span>
</div>
<div id="sea-list-marketing-close" class="sea-list-marketing-close cm-close"></div>

```

HTML when filter is on:

Use Default

☒ Use Custom

```

<div class="sea-list-marketing-inner">
  <span class="cm-package"></span>
  <span id="sea-list-marketing-label">Ticket Packages Available</span>
  <span class="sea-list-marketing-action-label" id="sea-list-marketing-action-label">Hide Packages</span>
</div>
<div id="sea-list-marketing-close" class="sea-list-marketing-close cm-close"></div>

```

Or in code:



Map Banner (large screen)

Seatics.config.enableMapMarketing is used to display packages marketing in the map area of the widget. By default, this is set to false. Use the config setting Seatics.config.mapMarketingHtmlFilter to customize the content of the packages marketing banner and the setting Seatics.config.mapMarketingHtmlAll to customize the content of the banner that returns the user to the main list.

code snippet:

```

<script>
  Seatics.config.enableMapMarketing = true;
  Seatics.config.mapMarketingHtmlFilter = '<span
class="sea-marketing-header-gift icon-gift"></span><div
id="sea-map-marketing-close" class="sea-marketing-header-
close icon-cancel"></div><span class="sea-marketing-header-
label">Ticket Packages</span><span class="sea-marketing-
header-label-show">Show</span>';
  Seatics.config.mapMarketingHtmlAll = '<span
class="sea-marketing-header-gift icon-gift"></span><div
id="sea-map-marketing-close" class="sea-marketing-header-
close icon-cancel"></div><span class="sea-marketing-header-
label">Ticket Packages</span><span class="sea-marketing-
header-label-show">Hide</span>';
</script>

```

+ — ↺ All Packages Parking Passes A > Filters (0) ▾			
	Promenade Reserved 524		
	Row 15	(i)	\$70/ea
	2 Tickets ↴		
	Promenade Reserved 528		
	Row 14	(i)	\$77/ea
	2 Tickets ↴		
☆	Promenade Reserved In...		
	Row 10	(i)	\$78/ea
	2 Tickets ↴		
	Promenade Reserved 528		
	Row 13	(i)	\$81/ea
	2 Tickets ↴		
	Promenade Reserved In...		
	Row 14	(i)	\$83/ea
	2 Tickets ↴		
	Promenade Reserved 502		
	Row 16	(i)	\$84/ea
	2 Tickets ↴		
☆	Promenade Reserved 503		
	Row 12	(i)	\$85/ea
	1-8 Tickets ↴		
☆	Promenade Reserved 503		
	Row 7	(i)	\$85/ea
	2 Tickets ↴		

`Seatics.config.enableHeaderMarketing` is used to display packages marketing in the event info area of the widget. By default, this is set to `true`. Use the config setting `Seatics.config.headerMarketingHtmlFilter` to customize the content of the packages marketing banner and the setting `Seatics.config.headerMarketingHtmlAll` to customize the content of the banner that returns the user to the main list.

```
<script>
    Seatics.config.enableHeaderMarketing = true;
    Seatics.config.headerMarketingHtmlFilter = '<span
class="sea-marketing-header-gift icon-gift"></span><div
id="sea-marketing-header-close" class="sea-marketing-header-
close icon-cancel"></div><span class="sea-marketing-header-
label">Ticket Packages</span><span class="sea-marketing-
header-label-show">Show</span>';
    Seatics.config.headerMarketingHtmlAll = '<span
class="sea-marketing-header-gift icon-gift"></span><div
id="sea-marketing-header-close" class="sea-marketing-header-
close icon-cancel"></div><span class="sea-marketing-header-
label">Ticket Packages</span><span class="sea-marketing-
header-label-show">Hide</span>';
</script>
```


Ticket Packages Available! Hide Packages			
All	Packages	Parking Passes	A > Filters (0) v
Gold-Fan	Row Package		\$235/ea
1-6 Ticket Packages			
Note: Gold Fan Package inc			
Silver-Fan	Row Package		\$235/ea
1-6 Ticket Packages			
Note: Silver Fan Package in			
Diamond-Fan	Row Package		\$288/ea
1-6 Ticket Packages			
Note: Diamond Fan Packag			
Gold-Deluxe	Row Package		\$363/ea
1-6 Ticket Packages			
Note: Gold Deluxe Package			
Silver-Deluxe	Row Package		\$363/ea
1-6 Ticket Packages			
Note: Silver Deluxe Package			
Diamond-Deluxe	Row Package		\$416/ea
1-6 Ticket Packages			
Note: Diamond Deluxe Pack			
STANDARD	Row HOTEL PACKAGE		\$686/ea
2-4 Ticket Packages			
Note: Standard Hotel Packa			

Ticket List Banner (large screen)

Seatics.config.enableListMarketingDesktop is used to display packages marketing above the ticket list on the large screen layout. By default, this is set to false. Use the config setting Seatics.config.listMarketingHtmlFilter to customize the content of the packages marketing banner and the setting Seatics.config.listMarketingHtmlAll to customize the content of the banner that returns the user to the main list. Content changes will also affect the banner above the ticket list on small screens.

code snippet:

```
<script>
    Seatics.config.enableListMarketingDesktop = true;
    Seatics.config.listMarketingHtmlFilter = '<div
class="sea-list-marketing-inner vertical-align-middle"><span
class="icon-gift"></span><span class="sea-list-marketing-
label" id="sea-list-marketing-label">Ticket Packages
Available!</span><span class="sea-list-marketing-action-
label" id="sea-list-marketing-action-label">Show
Packages</span><span id="sea-list-marketing-close"
class="sea-list-marketing-close icon-cancel"></span></div>';
    Seatics.config.listMarketingHtmlAll = '<div
class="sea-list-marketing-inner vertical-align-middle"><span
class="icon-gift"></span><span class="sea-list-marketing-
label" id="sea-list-marketing-label">Ticket Packages
Available!</span><span class="sea-list-marketing-action-
label" id="sea-list-marketing-action-label">Hide
Packages</span><span id="sea-list-marketing-close"
class="sea-list-marketing-close icon-cancel"></span></div>';
</script>
```

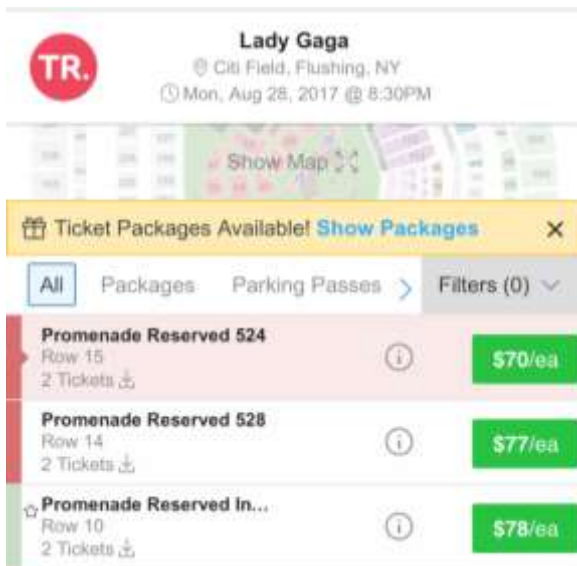

Ticket List Banner (mobile)

Seatics.config.enableListMarketingMobile is used to display packages marketing above the ticket list on the small screen layout. By default, this is set to true. Use the config setting Seatics.config.listMarketingHtmlFilter to customize the content of the packages marketing banner and the setting Seatics.config.listMarketingHtmlAll to customize the content of the banner that returns the user to the main list. Content changes will also affect the banner above the ticket list on large screens.

code snippet:

```
<script>
    Seatics.config.enableListMarketingMobile = true;
    Seatics.config.listMarketingHtmlFilter = '<div
class="sea-list-marketing-inner vertical-align-middle"><span
class="icon-gift"></span><span class="sea-list-marketing-
label" id="sea-list-marketing-label">Ticket Packages
Available!</span><span class="sea-list-marketing-action-
label" id="sea-list-marketing-action-label">Show
Packages</span><span id="sea-list-marketing-close"
class="sea-list-marketing-close icon-cancel"></span></div>';
    Seatics.config.listMarketingHtmlAll = '<div
class="sea-list-marketing-inner vertical-align-middle"><span
class="icon-gift"></span><span class="sea-list-marketing-
label" id="sea-list-marketing-label">Ticket Packages
Available!</span><span class="sea-list-marketing-action-
label" id="sea-list-marketing-action-label">Hide
Packages</span><span id="sea-list-marketing-close"
class="sea-list-marketing-close icon-cancel"></span></div>';
</script>
```

ADVANCED CONFIGURATION SETTINGS


CHECKOUT DEEP LINKING

Some sites might want to use an alternate way to specify deep links other than the query string. For these cases a site can provide their own functions to determine each deep link parameter value. If configured, these functions will take precedence over the query string setting. You can mix and match query string and custom functions – maps will only use the custom functions you’ve defined and will fall back to using the query string if you haven’t specified a custom function.

example code:

```
<script>
  Seatics.config.checkoutDeepLinkTgID = function(){ return 1234775; };
  Seatics.config.checkoutDeepLinkQuantity = function(){ return 3; };
  Seatics.config.checkoutDeepLinkExpectedPrice = function(){ return 60; };
  Seatics.config.checkoutDeepLinkCustomerName = function(){ return "Jane"; };
</script>
```


NO TICKETS HANDLER

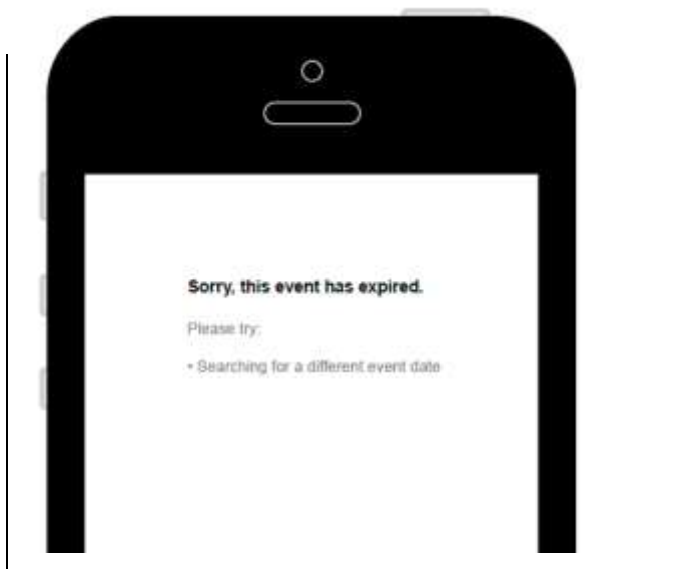

Expired Events

If the user reaches a ticket results page for an event that has already occurred, an error message displays. The site can override this handling with custom handling using `Seatics.config.noEventHandler`—sending the user to a search results page for related events, for example.

No Inventory

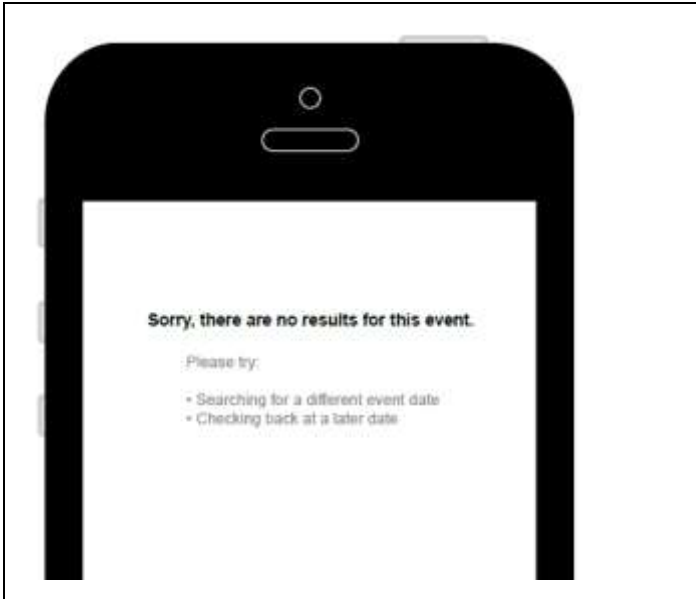

If the user reaches a ticket results page for event that has no inventory available, an error message displays. The site can override this handling with custom handling using `Seatics.config.noTicketsHandler`—sending the user to a search results page for related events, for example.

SPECIAL FUNCTIONS

`Seatics.config.onBuyButtonClicked` is a function that will execute after the user clicks the call to action button but before the user is redirected to checkout. It can be used for tracking that the user clicked the 'Buy' button.

`Seatics.config.mapFinishedRenderingHandler` is a function that will execute after the map is displayed and all UI elements have been loaded. It can be used to track interactions with the UI. Because of the way the ticket group list is loaded, some additional jQuery is needed to listen for interactions on the list.

WHEN A MAP IS UNAVAILABLE



We offer a large catalog of interactive and static maps, but there may be the rare case that we don't have a map for an event. By default, we display a "Map Coming Soon" image when there is no map available. The `Seatics.config.noMapImageUrl` configuration setting can be used to pass in the URL of your own map image, replacing our placeholder.

You can also create a support ticket to request the desired map be created by our cartography team.



Please note that if you choose to override the map or image provided by TicketNetwork, you are responsible for the accuracy of the map you display.

code snippet:

```
<script>
    Seatics.config.noMapImageUrl =
    "https://yourOwnImageUrl";
</script>
```

CUSTOM LEVELS



Generally, when venue maps are created, sections are grouped into the same levels as are defined on maps released by the primary market. This one size fits all approach works for most Seatics Maps users because we provide venue layouts consistent with others in the marketplace. However, some maps clients want a more simplified organization of sections. On the other end of the spectrum, other clients want more granularity.

Seatics.config.customLevels allows the site to define custom levels. Create your own uniquely defined level by giving it a name and assigning an array of sections to it. You can also specify a color for the level (in HTML format), or allow the new level to use the default palette. If the level codes specified by our cartographers are available to you, you can use those to include a full venue level in your new custom level instead of listing each section in that level individually.

When you create custom levels, all sections in the venue must be assigned to newly defined levels. If you want some levels to remain the same as in the default map, you will have to redefine them when creating your custom levels.

example code:

```
<script>
  Seatics.config.customLevels=[{ name:"Custom 1", sections:["201", "202", "203", "204", "224", "225", "226", "227",
    "228", "308", "320", "321", "322" ], levels: ["Hm$Rn$Porch$Vw", "GS",
    "Budweiser$Roof$Deck", "Hm$Rn$Porch$Terr", "Fld$Vw", "Skyline$Vw", "Met$Clb"],
    color:"#bfe1bf"},
    { name:"Custom 2", sections:["P", "Q", "R", "S", "T", "U", "V", "219", "220", "221",
    "222", "223", "205", "206", "207", "208", "209", "309", "310", "311", "312", "313",
    "314", "315", "316", "317", "318", "319"], levels: ["Event$Ste"], color:"#f2e394"},
    { name:"Custom 3", sections: ["123", "124", "A", "B", "C", "M", "N", "201", "211",
    "212", "213", "214", "215", "216", "217", "218"], levels: ["Fld$Bx", "L$Fld$B1",
    "Overlook", "The$Pav", "R$Fld$B1"], color:"#f2ae72"},
    { name:"Custom 4", sections: ["1", "2", "3", "14", "15", "16", "17", "104", "105",
    "106", "107", "108", "109", "118", "119", "120", "121", "122", "D", "E", "F", "G", "H",
    "J", "K", "L"], color:"#e97459"},
    { name:"Custom 5", sections: ["4", "5", "6", "11", "12", "13", "110", "111", "112",
    "113", "114", "115", "116", "117"], levels: ["Champ$Clb"], color:"#a2d7d8"}];
</script>
```

CUSTOMIZING SEATICS.TEXT

The Seatics libraries contain additional text used to build the map, ticket list, and other page components. We only recommend changing this text when absolutely necessary and keeping the changes as minor as possible. As we develop new features we may add new text, or adjust the language in the existing text.

If you want to make changes to the text, please code them as described below to ensure compatibility with future releases. In order to keep maps performant, we initialize pieces of the text at different times (depending on when that text is shown in the UI). We may rearrange the Text object from time to time as the UI changes or remove text that is no longer applicable, but if you follow the guidance here you will never run into an issue.

The code to adjust the Text contents should be executed immediately after the Map Widget javascript.

example code:

```
<script src="https://mapwidget3.seatics.com/js?eventId=xxxxx&websiteConfigId=xxx"></script>
<script>
  // Seatics.Text is a javascript object. You can use dot-notation or string-based property access to
  adjust individual pieces of text
  Seatics.Text.DeepLink_CloseModalButton = "Select new tickets"; // specify completely new text
  Seatics.Text["Desktop_DisclosuresTextCurrency"] = function(text){ return text.replace("USD",
  "Points"); }; // or specify a function that will adjust the contents of the text when it's initialized
</script>
```

Do not try and do a replace on a value in the text directly after calling MapAndLayout as the values in Text will not be loaded yet and you will get an undefined error. (i.e. don't do `Seatics.Text["Desktop_DisclosuresTextCurrency"] = Seatics.Text["Desktop_DisclosuresTextCurrency"].replace("USD", "Points");`).

PRE-FILTERING SETTINGS

There are cases where a site wants to be able to send a user to a maps page that is pre-filtered to show certain inventory. They may want to deep link the user to just parking or packages from another page on the site, for example. Or they may want to direct users to inventory under \$100 for the weekend's Knicks game from an email campaign.

We've created several configuration settings that can be set using query string parameters appended to the URL of the page. The site will be responsible for setting up the query string handling.

Property	Definition	Options
<code>Seatics.config.ticketTypeConstraints</code>	Used to filter the list by ticket type	<code>Seatics.TicketType.Parking</code> <code>Seatics.TicketType.Hotels</code> <code>Seatics.TicketType.Packages</code> <code>Seatics.TicketType.AccessPasses</code> <code>Seatics.TicketType.FlexTickets</code>
<code>Seatics.config.deliveryTypeConstraints</code>	Used to filter the list by delivery type	<code>Seatics.DeliveryType.ETickets</code> <code>Seatics.DeliveryType.InstantDownload</code>
<code>Seatics.config.ticketQuantityConstraints</code>	Used to filter the list by quantity	1 2 3 4
<code>Seatics.config.ticketPriceConstraints</code>	Used to filter the list by price	See notes below

FILTERING BY TICKET TYPE

To pre-filter the TG list by ticket type, set the `ticketTypeConstraints` parameter. You can set a **single** ticket type like this:

```
Seatics.config.ticketTypeConstraints = Seatics.TicketType.Packages;
```

Or **multiple** options like this:

```
Seatics.config.ticketTypeConstraints = [Seatics.TicketType.Packages, Seatics.TicketType.Hotels];
```

FILTERING BY DELIVERY TYPE

To pre-filter the TG list by delivery type, set the `deliveryTypeConstraints` parameter. You can set a **single** delivery type like this:

```
Seatics.config.deliveryTypeConstraints = Seatics.DeliveryType.ETickets;
```

Or **multiple** options like this:

```
Seatics.config.deliveryTypeConstraints = [Seatics.DeliveryType.ETickets,
Seatics.DeliveryType.InstantDownload];
```

FILTERING BY QUANTITY

To pre-filter the TG list by quantity, set the `ticketQuantityConstraints` parameter. Because the widget's quantity filter goes up to 4+, the largest value you can enter is 4.

Example:

```
Seatics.config.ticketQuantityConstraints=4;
```

If nothing matches the pre-filter criteria, all tickets will display.

FILTERING BY PRICE

To pre-filter the TG list by price, set the `ticketPriceConstraints` parameter. This config parameter takes a two element array.

Example:

```
Seatics.config.ticketPriceConstraints = [5, 500];
```

The first element is the minimum price and the second element is the maximum price.

To set only a **minimum price**, pass in null for the second value like this:

```
Seatics.config.ticketPriceConstraints = [5, null];
```

Alternately, you can use just a single element array:

```
Seatics.config.ticketPriceConstraints = [5];
```

To set only a **maximum price**, pass in null for the first value like this:

```
Seatics.config.ticketPriceConstraints = [null, 500];
```

For any of these settings, if nothing matches the pre-filter criteria, all tickets will display.

CHANGE TABLE

Contributor Name	Description of Change	Change Date
Stacey Bednarz	Added change table, fixed typos, shifted order of configs, added face value configs	3/22/18
Stacey Bednarz	Added note about admin panel, removed references to C2 checkout	7/12/18
Stacey Bednarz	Added quantity modal configuration, restructured configurations	7/26/18
Stacey Bednarz	Added Google Reseller Config information, identified config settings available in the admin app, added missing config setting descriptions	7/27/18
Stacey Bednarz	Added inventory disclaimer info and forced quantity selection config	12/20/18
Sarah Knowles	Added checkout deep linking, updated inventory disclaimer screenshots	5/17/2021
Sarah Knowles	Added instructions for updating Seatics.Text	6/28/2021
Sarah Knowles	Added documentation for missing/new configuration options. • levelColorsSmallVenue • c3UtmSource • c3UtmMedium • c3UtmCampaign • c3UtmContent • c3UtmTerm • c3PromoCode c3PaymentMethods *NEW	2/14/2022
Sarah Knowles	Updated earliest supported jQuery and Bootstrap versions	9/12/2022
Sarah Knowles	Added currency symbol and currency globalization configurations	10/4/2022
Sarah Knowles	Added H1 tag configuration	2/20/2023
Sarah Knowles	Updated/extended configuration documentation for Face Value. Added documentation for All-In Pricing and Service Fee display options.	4/6/2023