Basic CRUD in MySQL Server

Create, Retrieve, Update, Delete – Using SQL Queries

SoftUni Team Technical Trainers







Software University

https://softuni.bg

Table of Contents



- 1. Query Basics
- 2. Retrieving Data
- 3. Writing Data in Tables
- 4. Modifying Existing Records



Have a Question?







SQL Introduction

SQL Queries – Few Examples



Select first, last name and job title about employees:

```
SELECT first_name, last_name, job_title FROM employees;
```

Select projects which start on 01-06-2003:

```
SELECT * FROM projects WHERE start_date='2003-06-01';
```

• Inserting data into table:

```
INSERT INTO projects(name, start_date)
VALUES('Introduction to SQL Course', '2006-01-01');
```

SQL Queries – Few Examples



Update end date of specific projects:

```
UPDATE projects
   SET end_date = '2006-08-31'
WHERE start_date = '2006-01-01';
```

Delete specific projects:

```
DELETE FROM projects
WHERE start_date = '2006-01-01';
```




Using SQL SELECT

Capabilities of SQL SELECT




Projection

Take a subset of the columns




Selection

Take a subset of the rows



Join

Combine tables by some column

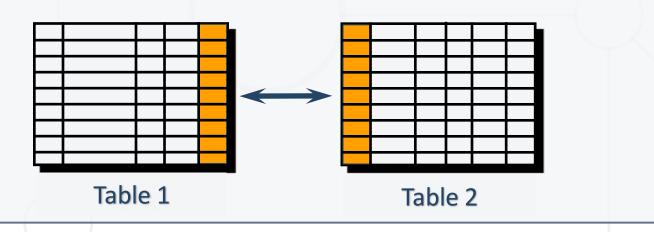

SELECT – Examples



Selecting all columns from the "employees" table

id	first_name	last_name	job_title	department_id	salary
1	John	Smith	Therapist	1	900
2	John	Johnson	Acupuncturist	1	880
3	Smith	Johnson	Technician	2	1100
•••					



Problem: Select Employee Information



- Write a query to select all employees from "hospital" database
 - Retrieve information about their id, first_name, last_name and job_title
 - Ordered by id
- Note: Query Hospital database

id	first_name	last_name	job_title
1	John	Smith	Therapist
2	John	Johnson	Acupuncturist
3	Smith	Johnson	Technician
•••			

Solution: Select Employee Information



```
SELECT id, first_name, last_name, job_title

FROM employees

ORDER BY id;

Table name
```

Aliases rename a table or a column heading:

```
SELECT e.id AS 'No.',
e.first_name AS 'First Name',
e.last_name AS 'Last Name',
e.job_title AS 'Job Title'
FROM employees AS e ORDER BY id;
```

Concatenation



- You can concatenate column names or strings using the concat() function
- concat() returns the string that results from concatenating the arguments.
 - String literals are enclosed in ['](single quotes)
 - Table and column names containing special symbols use [`] (backtick)

```
SELECT concat(`first_name`,' ',`last_name`) AS 'full_name',
    job_title` as 'Job Title',
    id` AS 'No.'
FROM `employees`;
```

Concatenation(2)



 Another function of concatenation is concat_ws() - stands for concatenate with separator and is a special form of CONCAT().

```
SELECT concat_ws('', first_name', `last_name', `job_title')
AS 'full_name',
`job_title` AS 'Job Title',
`id` AS 'No.'
FROM `employees`;
```

Skip any NULL values after the separator argument.

Problem: Select Employees with Filter



- Find information about all employees, listing their:
 - Full Name
 - Job title
 - Salary

- Use concatenation to display first and last names as one field
- Note: Query Hospital database

Solution: Select Employees with Filter



```
Concatenation
SELECT concat(`first_name`,' /', last_name`) AS
     Full name',
     job_title AS 'Job title',
                                          Column alias
       `salary` AS 'Salary'
  FROM employees WHERE salary > 1000;
```

Filtering the Selected Rows



Use DISTINCT to eliminate duplicate results

```
SELECT DISTINCT `department_id`
FROM `employees`;
```

You can filter rows by specific conditions using the WHERE clause

```
SELECT `last_name`, `department_id`
FROM `employees`
WHERE `department_id` = 1;
```

Other logical operators can be used for better control

```
SELECT `last_name`, `salary`
FROM `employees`
WHERE `salary` <= 20000;</pre>
```

Other Comparison Conditions



Conditions can be combined using NOT, OR, AND and brackets

```
SELECT `last_name` FROM `employees`
WHERE NOT (`manager_id` = 3 OR `manager_id` = 4);
```

Using BETWEEN operator to specify a range:

```
SELECT `last_name`, `salary` FROM `employees`
WHERE `salary` BETWEEN 20000 AND 22000;
```

Using IN / NOT IN to specify a set of values:

```
SELECT `first_name`, `last_name`, `manager_id`
FROM `employees`
WHERE `manager_id` IN (109, 3, 16);
```

Problem: Select Employees by Multiple Filters



- Write a query to retrieve information about employees, order by id
 - who are in department 4
 - have salary higher or equal to 1600

	id	first_name	last_name	job_title	department_id	salary
١	7	Jack	Jackson	Epidemiologist	4	1800
	9	Nikolay	Ivanov	Nutrition Technician	4	1600



SELECT * FROM employees AS e

WHERE e.department_id = 4 AND e.salary >= 1600;

Comparing with NULL



- NULL is a special value that means missing value
 - Not the same as 0 or a blank space
- Checking for NULL values

```
SELECT `last_name`, `manager_id`
                    FROM `employees`
This is always false! WHERE `manager_id` = NULL;
```

```
SELECT `last_name`, `manager_id`
FROM `employees`
WHERE `manager_id` IS NULL;
```

```
SELECT `last_name`, `manager_id`
FROM `employees`
WHERE `manager_id` IS NOT NULL;
```

Sorting with ORDER BY



- Sort rows with the ORDER BY clause
 - ASC: ascending order, default
 - DESC: descending order

```
SELECT `last_name`, `hire_date`
FROM `employees`
ORDER BY `hire_date`;
```

```
SELECT `last_name`, `hire_date`
FROM `employees`
ORDER BY `hire_date` DESC;
```

LastName	HireDate		
Gilbert	1998-07-31		
Brown	1999-02-26		
Tamburello	1999-12-12		
•••	•••		

LastName	HireDate
Valdez	2005-07-01
Tsoflias	2005-07-01
Abbas	2005-04-15
•••	•••

Views



- Views are virtual tables made from others tables, views or joins between them
- Usage:
 - To simplify writing complex queries
 - To limit access to data for certain users

Views (2)



Table 1			
Column 1	Column 2	Column 3	
	\mathcal{A}		

	Table 2	
Column 1	Column 2	Column 3

v_table1_table2				
Column 1	Column 2	Column 3		

Views – Example



Get employee names and salaries, by department

```
CREATE VIEW `v_hr_result_set` AS
SELECT
          CONCAT(`first_name`,' ',`last_name`) AS 'Full Name', `salary`
FROM `employees` ORDER BY `department_id`;
```

```
SELECT * FROM `v_hr_result_set`;
```


Problem: Top Paid Employee



Create a view that selects all information about the top paid

employee

- Name the view v_top_paid_employee
- Note: Query hospital database

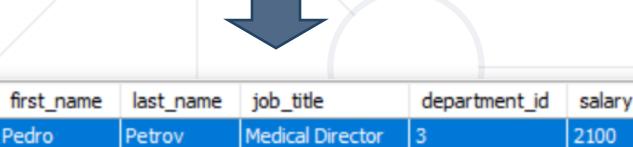

Solution: Top Paid Employee



```
CREATE VIEW `v_top_paid_employee`
AS

SELECT * FROM `employees`
ORDER BY `salary` DESC LIMIT 1;
```

Greatest value first

SELECT * FROM `v_top_paid_employee`;

Sorting column



Writing Data in Tables

Using SQL INSERT

Inserting Data



The SQL INSERT command

Values for all columns

```
INSERT INTO `towns` VALUES (33, 'Paris');
```

```
INSERT INTO projects(`name`, `start_date`)
VALUES ('Reflective Jacket', NOW())
Specify
columns
```

Bulk data can be recorded in a single query, separated by comma

Inserting Data (2)



You can use existing records to create a new table

Existing source

Or into an existing table

List of columns

```
INSERT INTO projects(name, start_date)
SELECT CONCAT(name,' ', ' Restructuring'), NOW()
FROM departments;
```



Modifying Existing Records

Using SQL UPDATE and DELETE

Updating Data



The SQL UPDATE command

```
UPDATE `employees`
   SET `last_name` = 'Brown'
WHERE `employee_id` = 1;
```

Note: Don't forget the WHERE clause!

Problem: Update Employees Salary



Update all employees salaries whose job_title is "Therapist" by 10%.

all salaries ordered ascending



```
UPDATE employees
SET salary = salary + (salary * 0.1)
WHERE job_title = 'Therapist';
SELECT salary
FROM employees
ORDER BY salary ASC;
```

		_
	salary	
١	880	
	990	
	1089	
	1100	
	1100	
	1500.23	
	1600	
	1800	
	2100	

Deleting Data



Deleting specific rows from a table

Condition

```
DELETE FROM `employees`
WHERE `employee_id` = 1;
```

Note: Don't forget the WHERE clause!

Delete all rows from a table (TRUNCATE works faster than DELETE)

TRUNCATE TABLE users;

Problem: Delete from Table



- Delete all employees from the "employees" table who are in department 2 or 1.
- Order by id.

	id	first_name	last_name	job_title	department_id	salary
•	4	Peter	Petrov	Supervisor	3	1100
	5	Peter	Ivanov	Dentist	4	1500.23
	7	Jack	Jackson	Epidemiologist	4	1800
	8	Pedro	Petrov	Medical Director	3	2100
	9	Nikolay	Ivanov	Nutrition Technician	4	1600

Solution: Delete from Table

OR Condition



Delete Data

DELETE FROM employees

WHERE department_id = 1

OR department_id = 2;

SELECT * FROM employees

Summary



 We can easy manipulate our database with SQL queries

```
SELECT *
  FROM `projects`
  WHERE `start_date` = '2006-01-01';
```

 Queries provide a flexible and powerful method to manipulate records





Questions?

















SoftUni Diamond Partners




























SoftUni Organizational Partners









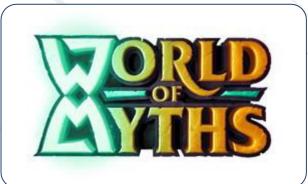

Trainings @ Software University (SoftUni)



- Software University High-Quality Education,
 Profession and Job for Software Developers
 - softuni.bg, softuni.org
- Software University Foundation
 - softuni.foundation
- Software University @ Facebook
 - facebook.com/SoftwareUniversity
- Software University Forums
 - forum.softuni.bg









License



- This course (slides, examples, demos, exercises, homework, documents, videos and other assets) is copyrighted content
- Unauthorized copy, reproduction or use is illegal
- © SoftUni https://softuni.org
- © Software University https://softuni.bg

