


LLD: Concurrency Control

"Concept & Coding" YT Video Notes

Scenario: Many concurrent request tries to book same Movie theatre Seat

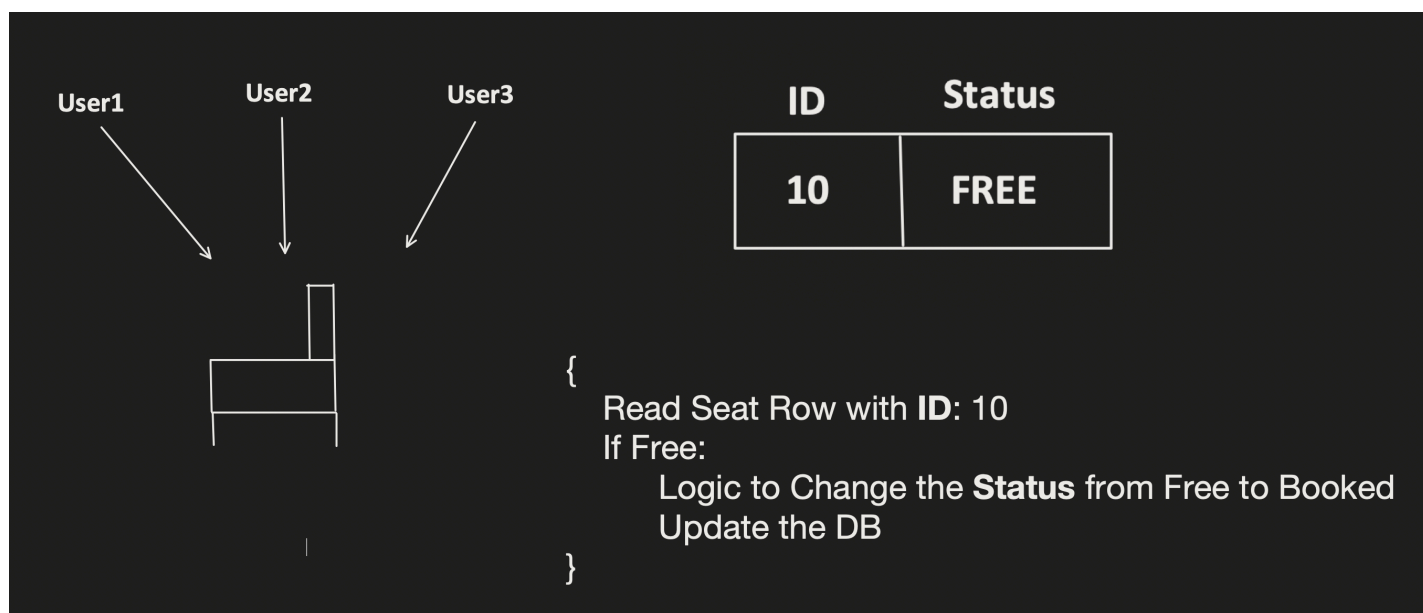

1. Using "**SYNCHRONIZED**" for the Critical Section:

```

synchronized ()
{
  Read Seat Row with ID: 10
  If Free:
    Logic to Change the Status from Free to Booked;
    Update the DB;
}
  
```

ID	Status
10	FREE

Will this solution works for Distributed System?

2. Using **Distributed Concurrency Control**