


EXERCISE-2

Q1) Create a counter component with a button.

```
exercise-2 > src > components > Q1.jsx > default
1  import React from "react";
2  import { useState } from "react";
3  import './Css_files/Q1.css'
4  function Q1Counter(){
5      const [count,setCount]=useState(0);
6      let Increment=()=>{
7          setCount(count+1);
8      }
9      return(
10         <div className="counter">
11             <h2>Counter</h2>
12             <p>{count}</p>
13             <button onClick={Increment}>Increment</button>
14         </div>
15     )
16 }
17
18
19 export default Q1Counter;
```


React App:

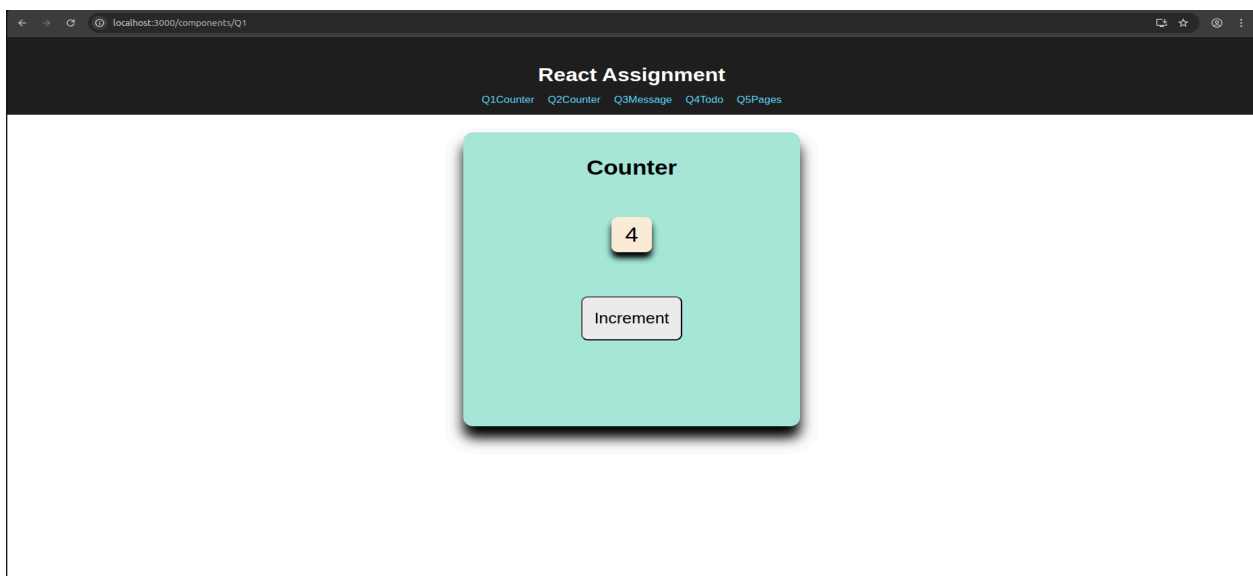

Q2) Create a counter with increment and decrement buttons.

```
exercise-2 > src > components > Q2.jsx > ...
1  import React from "react";
2  import { useState } from "react";
3  import './Css_files/Q2.css'
4
5  function Q2Counter(){
6      const [count,setCount]=useState(0);
7      let Increment=()=>{
8          setCount(count+1);
9      }
10     let Decrement=()=>{
11         setCount(count-1);
12     }
13     return(
14         <div className="counter">
15             <h2>Control Counter</h2>
16             <p>{count}</p>
17             <button onClick={Increment}>Increment</button>
18             <button onClick={Decrement} disabled={count===0}>Decrement</button>
19         </div>
20     )
21 }
22
23
24 export default Q2Counter;
```

React App:

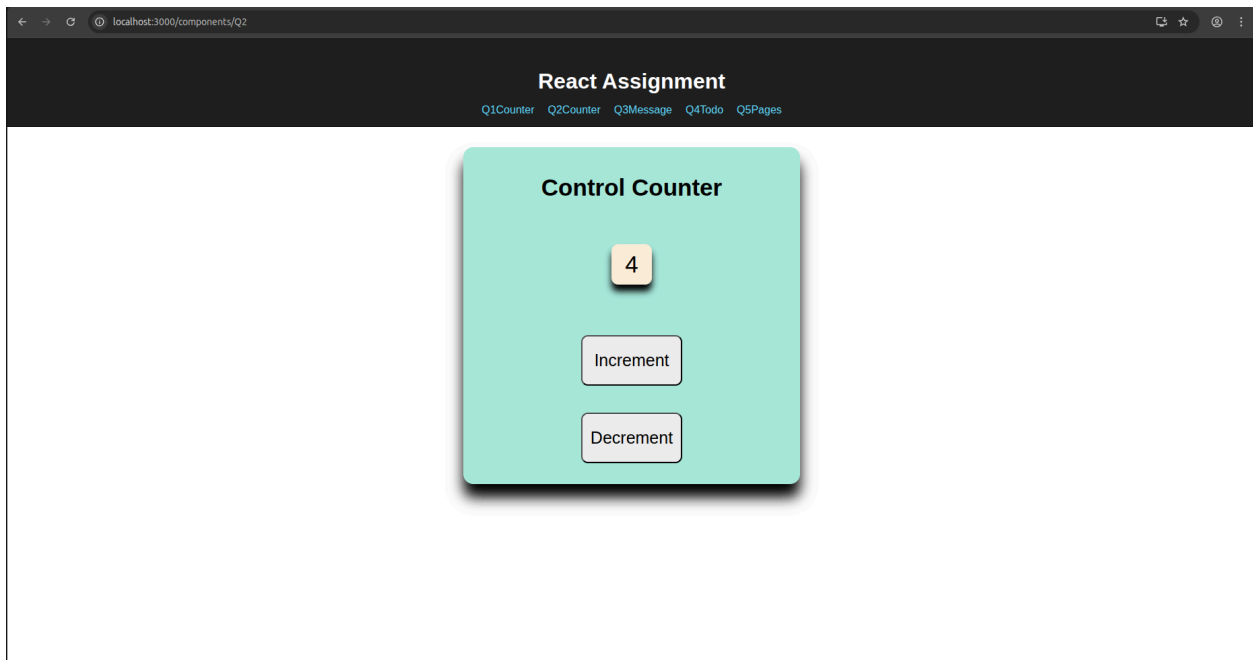

Q3) Create a parent() component that has a message in its state.


exercise-2 > src > components > Q3_Parent.jsx > default

```
1  import React from "react";
2  import { useState } from "react";
3  import Child from "../Q3_Child";
4  import "../Css_files/Q3.css"
5
6  function Q3Message(){
7      const [message,setMessage] = useState("");
8      let handleChange=(event)=>{
9          setMessage(event.target.value);
10     }
11     return(
12         <div class="msg">
13             <input type="text" value={message} placeholder="Enter text.." onChange={handleChange} />
14             <Child message={message}/>
15         </div>
16     )
17 }
18
19 export default Q3Message;
```

exercise-2 > src > components > Q3_Child.jsx > Child

```
1  import React from "react";
2
3  function Child({message}){
4      return(
5          <p>Child component value : <strong>{message}</strong> </p>
6      )
7  }
8
9  export default Child;
```

React App:

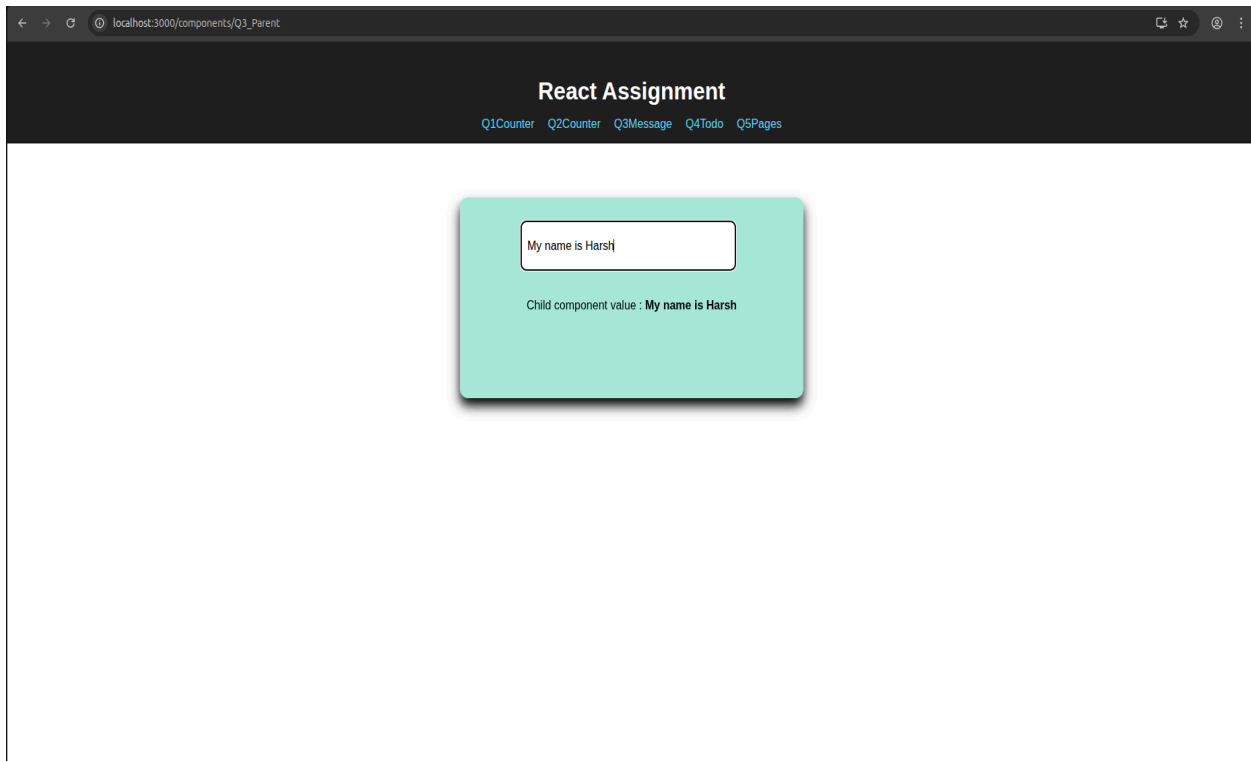

Q4) Create a TodoList component that stores a list of to-dos in its state.


```
exercise-2 > src > components > Q4.jsx > ...
1  import React, { useState } from "react";
2  import './Css_files/Q4.css'
3  function Q4Todo() {
4      const [todo, setTodo] = useState("");
5      const [todos, setTodos] = useState([]);
6
7      const addTodo = (e) => {
8          e.preventDefault();
9
10         if (todo.trim() === "") return;
11
12         setTodos([...todos, todo]);
13         setTodo("");
14     };
15
16     const deleteAll = () => {
17         setTodos([]);
18         setTodo("")
19     };
20
21     const deleteTodo = (indexToDelete) => {
22         const updatedTodos = todos.filter(
23             (value, index) => index !== indexToDelete
24         );
25
26         setTodos(updatedTodos);
27     };
28 }
```

```

29     return (
30       <div className="todo-box">
31         <form onSubmit={addTodo}>
32           <input
33             type="text"
34             placeholder="Enter todo item..."
35             value={todo}
36             onChange={(e) => setTodo(e.target.value)}
37           />
38
39           <button className="add-button" type="submit">
40             Add
41           </button>
42
43           <button
44             className="delete-all-button"
45             type="button"
46             onClick={deleteAll}
47           >
48             Delete All
49           </button>
50         </form>
51
52         <ul>
53           {todos.map((item, index) => (
54             <li key={index}>{item}
55               <button onClick={() => deleteTodo(index)}>Delete</button>
56             </li>
57           ))}
58         </ul>
59       </div>
60     );
61   }
62 }
63
64 export default Q4Todo;
65
66

```

React App:

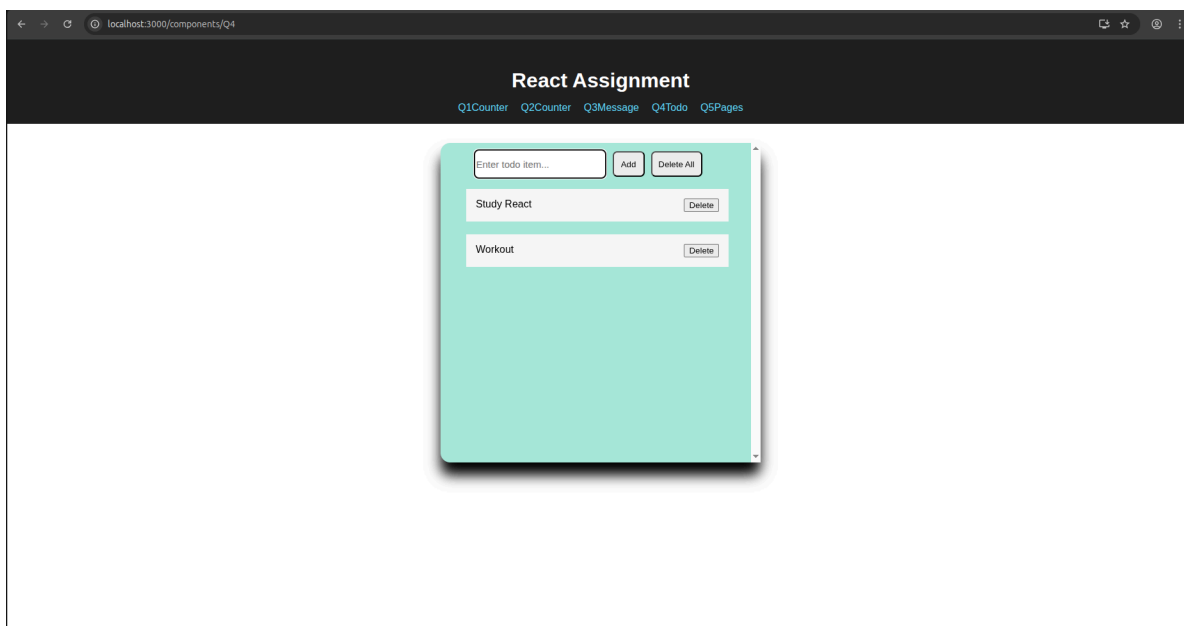

Q5)Create a component that toggles between two views: "Login" and "Logout".

Q5.jsx file:

```
exercise-2 > src > components > Q5.jsx > default
1  import { useState } from "react";
2  import LoginView from "../Q5_Login";
3  import LogoutView from "../Q5_Logout";
4  import './Css_files/Q5.css'
5
6  function Q5Pages() {
7    const [logged, setLogged] = useState(false);
8
9    return logged
10     ? <LogoutView onLogout={() => setLogged(false)} />
11     : <LoginView onLogin={() => setLogged(true)} />;
12  }
13
14  export default Q5Pages;
```

Q5LoginView.jsx file:

```
exercise-2 > src > components > Q5_Login.jsx > LoginView
1  function LoginView({ onLogin }) {
2    return (
3      <div className="container">
4        <h3>Please Log In</h3>
5        <button onClick={onLogin}>Login</button>
6      </div>
7    );
8  }
9
10  export default LoginView;
```

Q5LogoutView.jsx file:

```
exercise-2 > src > components > Q5_Logout.jsx > LogoutView
1  function LogoutView({ onLogout }) {
2    return (
3      <div className="container">
4        <h3>Logged in, Welcome Back!</h3>
5        <button onClick={onLogout}>Logout</button>
6      </div>
7    );
8  }
9
10  export default LogoutView;
```

React App:

