



EXERCISE-3

Q1) Create a component that shows different content based on whether the user is logged in or not (e.g., "Welcome back" or "Please log in"). Use a state hook to toggle the logged-in state and update the UI accordingly.

Q1.jsx:

```
exercise-3 > src > components > Q1 > Q1LoginToggle.jsx > LoginToggle
1  import { useState } from "react";
2  import "./Q1LoginToggle.css";
3
4  function LoginToggle() {
5    const [isLoggedIn, setIsLoggedIn] = useState(false);
6
7    return (
8      <div className={`container-login ${isLoggedIn ? "logged-in" : "logged-out"}`}>
9
10       <h3>
11         {isLoggedIn ? "Welcome Back !" : "Please Log In"}
12       </h3>
13
14       <button onClick={() => setIsLoggedIn(!isLoggedIn)}>
15         {isLoggedIn ? "Logout" : "Login"}
16       </button>
17
18     </div>
19   );
20 }
21
22
23 export default LoginToggle;
```

React App:

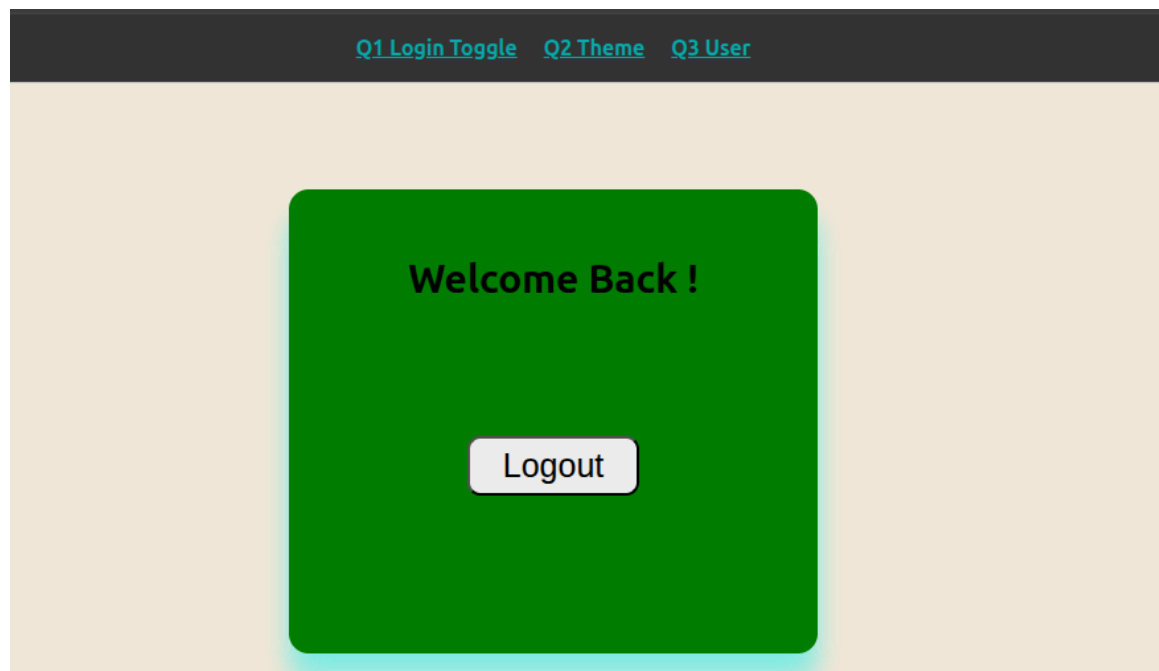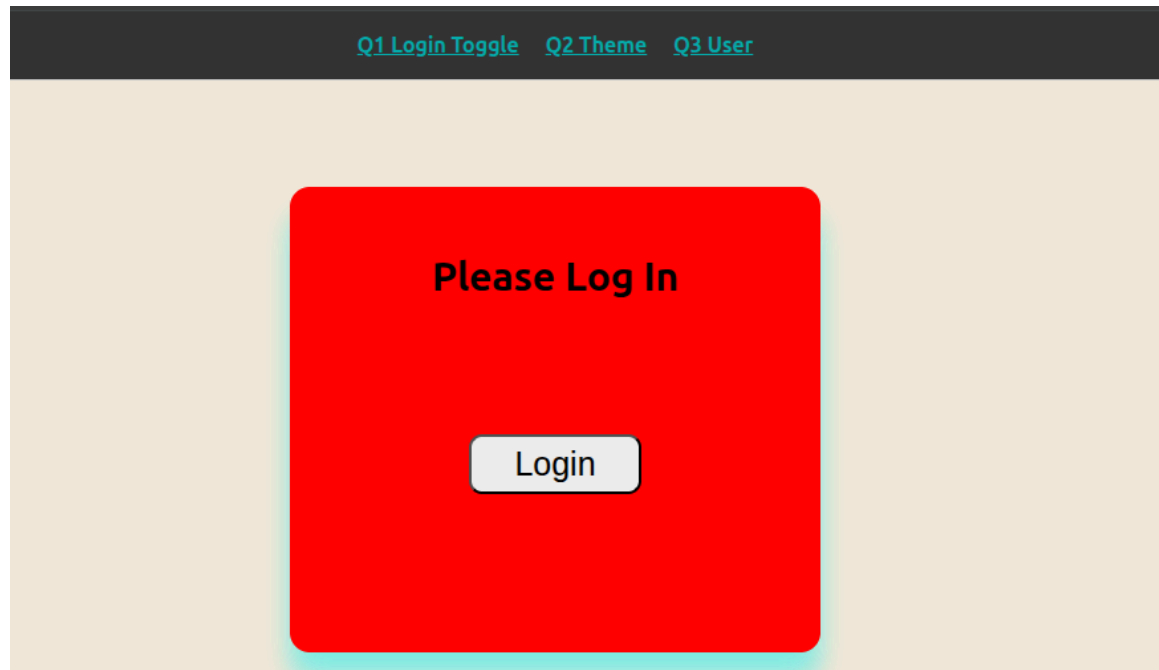

Q2) Create a simple ThemeContext that toggles between light and dark themes. Implement a ThemeProvider that supplies the current theme, and a ThemeToggler component that switches between themes. Make sure that the theme changes dynamically in child components.



Q2.jsx:

```
exercise-3 > src > components > Q2 > Q2ThemeToggler.jsx > default
1  import { useContext } from "react";
2  import { ThemeContext } from "../ThemeContext";
3  import "../Q2ThemeToggler.css"
4
5
6  function ThemeToggler() {
7    const { theme, toggleTheme } = useContext(ThemeContext);
8
9    return (
10     <div className="q2-theme">
11       <div className="card-toggle">
12         <h2>Theme: {theme}</h2>
13         <button className="card-btn" onClick={toggleTheme}>
14           Toggle Theme
15         </button>
16       </div>
17     </div>
18   );
19 }
20
21 export default ThemeToggler;
```

Q2Content.jsx:

```
exercise-3 > src > components > Q2 > ThemeContext.jsx > ...
1  import { createContext, useState, useEffect } from "react";
2
3  const ThemeContext = createContext();
4
5  function ThemeProvider({ children }) {
6    const [theme, setTheme] = useState("light");
7
8    const toggleTheme = () =>
9      setTheme(t => (t === "light" ? "dark" : "light"));
10
11    // 📌 GLOBAL theme applied here
12    useEffect(() => {
13      document.body.className = theme;
14    }, [theme]);
15
16    return (
17      <ThemeContext.Provider value={{ theme, toggleTheme }}>
18        {children}
19      </ThemeContext.Provider>
20    );
21  }
22
23  export { ThemeContext, ThemeProvider };
```

React App:

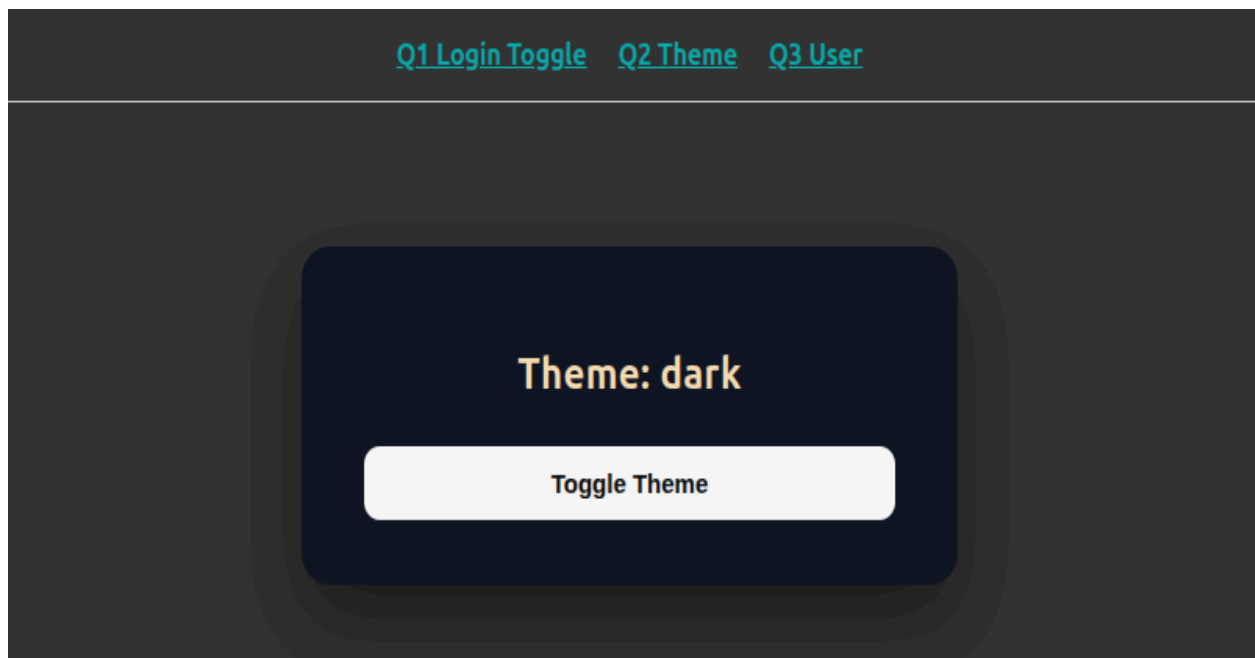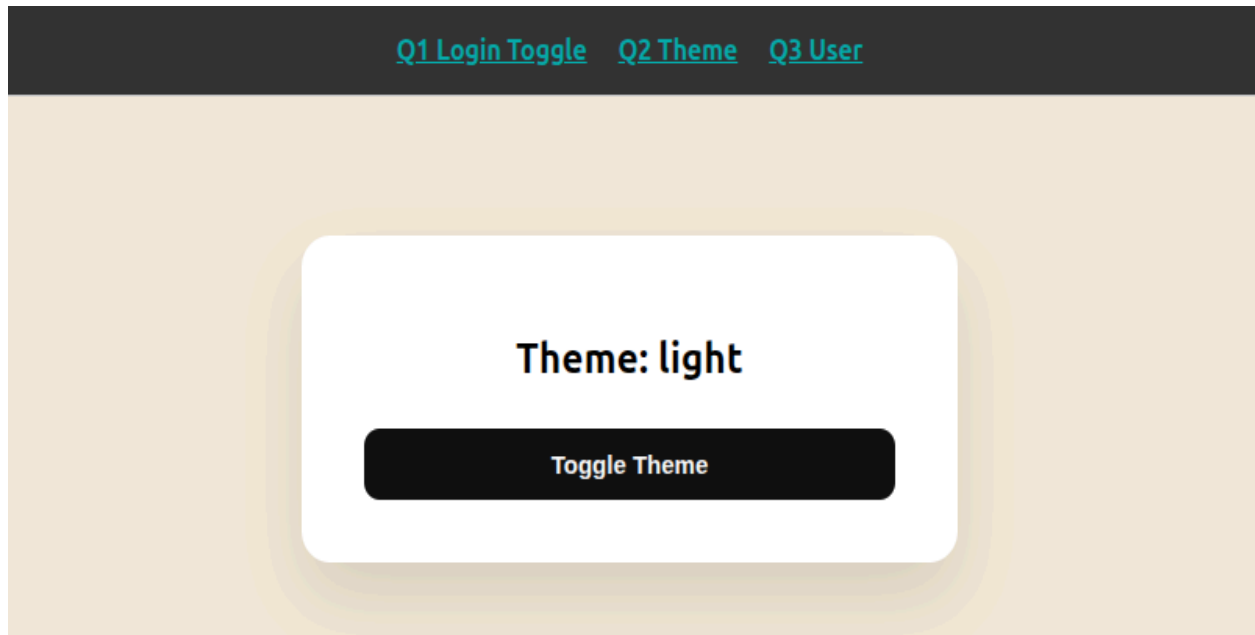

Q3) Create a UserContext that holds information about the logged-in user (e.g., name and email). Create a UserProfile component that displays the user's information, and a Login component that updates the user's data via context when the user logs in.

Q3.jsx:

```
exercise-3 > src > components > Q3 > Q3Login.jsx > Login
1  import { useContext, useState } from "react";
2  import { UserContext } from "../UserContext";
3  import UserProfile from "../Q3UserProfile";
4  import "../Q3Login.css";
5
6  function Login() {
7    const { login, user } = useContext(UserContext);
8
9    const [name, setName] = useState("");
10   const [email, setEmail] = useState("");
11   const [password, setPassword] = useState("");
12
13   const handleLogin = () => login(name, email, password);
14
15   return (
16     <div className="q3-user container">
17       <div className={`card ${user ? "hide" : ""}`>
18         {!user && (
19           <div className="login-form">
20             <h2>Login</h2>
21
22             <div className="form">
23               <input
24                 className="input"
25                 placeholder="Name"
26                 value={name}
27                 onChange={(e) => setName(e.target.value)}
28               />
29             </div>
30
31             <div className="form">
32               <input
33                 className="input"
34                 type="email"
35                 placeholder="Email"
36                 value={email}
37                 onChange={(e) => setEmail(e.target.value)}
38               />
39             </div>
40           )}
41     </div>
```

Q3Context.jsx:

```
exercise-3 > src > components > Q3 > Q3UserProfile.jsx > UserProfile
1  import { useContext } from "react";
2  import { UserContext } from "../UserContext";
3  import './Q3Login.css'
4
5  function UserProfile() {
6    const { user, logout } = useContext(UserContext);
7
8    if (!user) return null;
9
10   return (
11     <div className="box">
12       <h2>User Profile</h2>
13       <p>Name: {user.name}</p>
14       <p>Email: {user.email}</p>
15       <button className="btn" onClick={logout}>
16         Logout
17       </button>
18     </div>
19   );
20 }
21
22 export default UserProfile;
```

Q3Profile.jsx:

```
exercise-3 > src > components > Q3 > UserContext.jsx > UserProvider > login
1  import { createContext, useState } from "react";
2
3  const UserContext = createContext();
4
5  function UserProvider({ children }) {
6    const [user, setUser] = useState(null);
7
8    const login = (name, email) => {
9      setUser({ name, email });
10    };
11
12    const logout = () => {
13      setUser(null);
14    };
15
16    return (
17      <UserContext.Provider value={{ user, login, logout }}>
18        {children}
19      </UserContext.Provider>
20    );
21  }
22
23  export {UserContext,UserProvider}
```

React App:

[Q1 Login Toggle](#) [Q2 Theme](#) [Q3 User](#)

Login

[Q1 Login Toggle](#) [Q2 Theme](#) [Q3 User](#)

User Profile

Name: harsh

Email: harsh@gmail.com

Logout