

Tables

Chapter-8

Contents

- ✓ HTML Table
- ✓ Table Rows, Cells, and Headers
- ✓ Span Rows and Columns
- ✓ CSS3 Structural Pseudo-Classes

HTML Table

- ✓ An HTML table is composed of rows and columns, like a spreadsheet.
- ✓ Each individual table **cell** is at the intersection of a specific row and column.
 - ❖ Each table begins with a `<table>` tag and ends with a `</table>` tag.
 - ❖ Each table row begins with a `<tr>` tag and ends with a `</tr>` tag.
 - ❖ Each cell (table data) begins with a `<td>` tag and ends with a `</td>` tag.
 - ❖ Table cells can contain text, graphics, and other HTML elements.

Sample Code

```
<table>
<tr> <td>Name</td>
      <td>Birthday</td>
      <td>Phone</td> </tr>

<tr> <td>Jack</td>
      <td>5/13</td>
      <td>857-555-5555</td>
</tr>
```

```
<tr> <td>Sparky</td>
      <td>11/28</td>
      <td>303-555-5555</td> </tr>

</table>
```

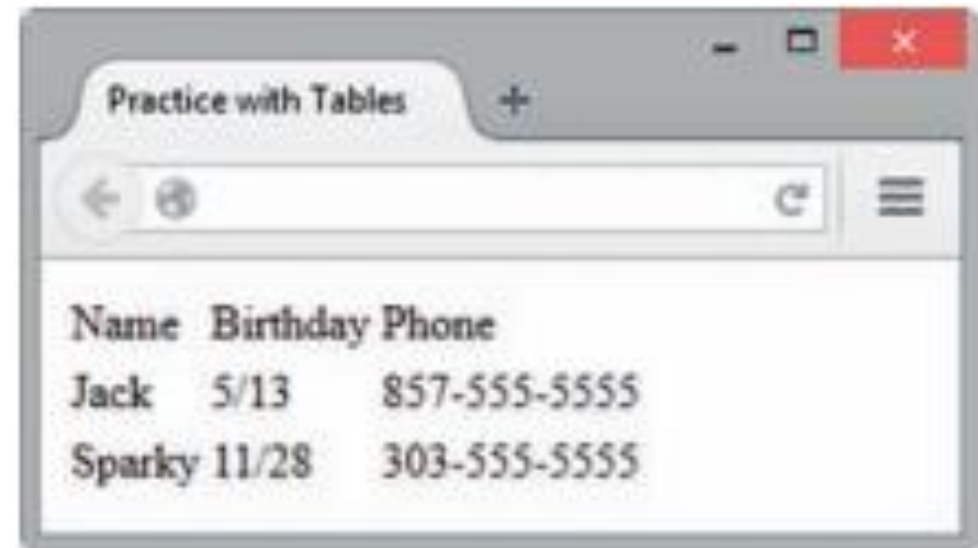


Table Element

- ✓ A **table element** is a block display element that contains tabular information.

Common attributes of the table element:

Attribute	Value	Purpose
align	left(default), right, center	Horizontal alignment of the table (absolute in HTML5)
bgcolor	Valid color value	Background color of the table (absolute in HTML5)
boder	0 1-100	Default; there is no visible border (absolute in HTML5) Visible border with pixel width specified
cellpadding	Numeric value	Specifies the space between the cell content and its border
cellspacing	Numeric value	Border spacing specifies the space between the cells

CSS is used to style the border of a table.

Table Captions

- ✓ The **caption element** is often used with a table to describe its contents.
- ✓ The caption begins with a **<caption>** tag and ends with a **</caption>** tag.

Bird Sightings

Name	Date
Bobolink	5/25/10
Upland Sandpiper	6/03/10

Sample Code

```
<table border="1">  
  <caption>Bird Sightings</caption>  
  <tr>  
    <td>Name</td>  
    <td>Date</td>  
  </tr>  
  <tr>  
    <td>Bobolink</td>  
    <td>5/25/10</td> </tr>
```

```
<tr>  
  <td>Upland Sandpiper</td>  
  <td>6/03/10</td>  
</tr>  
</table>
```

Table Rows, Cells, and Headers

- ✓ The **table row element** configures a row within a table on a web page.
- ✓ The table row begins with a `<tr>` tag and ends with a `</tr>` tag.

Attributes of the table row element

Attribute	Value	Purpose
align	Left (default) right ,center	Horizontal alignment of the table (obsolete in HTML5)
bgcolor	Valid color value	Background color of the table (obsolete in HTML5)

Cont'd

- ✓ Configures a cell within a row in a table on a web page.
- ✓ Table cell begins with a `<td>` tag and ends with a `</td>` tag.

Attributes of the table data and table header cell elements

Attribute	Value	Purpose
align	left(default), right, center	Horizontal alignment of the table (absolute in HTML5)
bgcolor	Valid color value	Background color of the table (absolute in HTML5)
header	The id value(s) of a column or row header cell	Associates the table data cells with table header cells
colspan	Numeric value	The number of columns spanned by a cell
height	Numeric value or percentage	Height of the cell (obsolete in HTML5)
rowspan	Numeric value	The number of rows spanned by a cell
width	Numeric value or percentage	Width of the cell (obsolete in HTML5)
valign	top, middle (default), bottom	The vertical alignment of the contents of the cell (obsolete in HTML5)

Cont'd

- ✓ The **table header element** is similar to a table data element and configures a cell within a row in a table on a web page.

```
<table border="1">  
<tr> <th>Name</th>  
      <th>Birthday</th>  
      <th>Phone</th>  
</tr>  
<tr> <td>Jack</td>  
      <td>5/13</td>  
      <td>857-555-5555</td> </tr>
```


```
<tr> <td>Sparky</td>  
      <td>11/28</td>  
      <td>303-555-5555</td>  
</tr>  
</table>
```

Name	Birthday	Phone
Jack	5/13	857-555-5555
Sparky	11/28	303-555-5555

Sample Code

```
table{ background-color: bisque; }
```

```
td,th,caption{color: blue; }
```

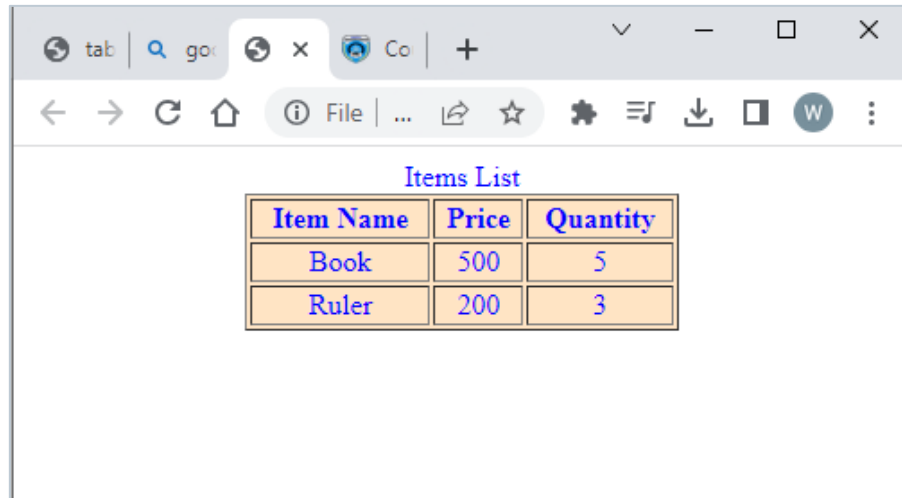

Item Name	Price	Quantity
Book	500	5
Ruler	200	3

```
<table border="1" width="50%" align="center">
```

```
<caption>Items List</caption>
```

```
<tr align="center"><th>Item Name</th>
```

```
<th>Price</th>
```

```
<th>Quantity</th>
```

```
</tr>
```

```
<tr align="center">
```

```
<td>Book</td>
```

```
<td>500</td>
```

```
<td>5</td>
```

```
</tr>
```

```
<tr align="center">
```

```
<td>Ruler</td>
```

```
<td>200</td>
```

```
<td>3</td>
```

```
</tr>
```

```
</table>
```

Span Rows and Columns

- ✓ Applying the `colspan` and `rowspan` attributes to table data or table header elements.
- ✓ The **`colspan` attribute** specifies the number of columns that a cell will occupy.
- ✓ The **`rowspan` attribute** specifies the number of rows that a cell will occupy.

Sample Code

```
<table border="1">
  <tr>
    <td colspan="2">This spans two columns</td>
  </tr>
  <tr>
    <td>Column 1</td>
    <td>Column 2</td>
  </tr>
  <tr>
    <td rowspan="2">This spans two rows</td>
    <td>Row 3 Column 2</td>
  </tr>
  <tr>
    <td>Row 4 Column 2</td>
  </tr>
</table>
```

This spans two columns	
Row 2 Column 1	Row 2 Column 2
This spans two rows	Row 3 Column 2
	Row 4 Column 2

Style a Table with CSS

- ✓ CSS was well supported by browsers, it was common practice to configure the visual aesthetic of a table with HTML attributes.

CSS properties used to style tables

HTML Attribute	CSS Property
align	To align a table, configure the width and margin properties for the table selector. For example, to center a table with a width of 75% of the container element, use <code>table { width: 75%; margin: auto; }</code> To align items within table cells, use <code>text-align</code>
bgcolor	background-color
boder	border, border-style, border-spacing
cellpadding	padding
height	height

Cont'd


CSS properties used to style tables

HTML Attribute	CSS Property
cellspacing	border-spacing ; a numeric value (px or em) or percentage. border-collapse configures the border area. The values are separate (default) and collapse. Use border-collapse: collapse; to remove extra space between table and table cell borders.
width	width
valign	The vertical alignment of the contents of the cell (obsolete in HTML5)
none	background-image
none	caption-side specifies the placement of the caption. Values are top (default) and bottom

Sample Code CSS

```
table {  
    background-color: rgb(210, 218, 218);  
    margin: auto;  
    border: 5px solid #000066;  
    width: 600px;  
}  
td, th {  
    border: 1px solid #000066;  
    padding: 0.5em;  
    font-family: Arial, sans-serif;  
    text-align: center;  
}  
.altrow {  
    background-color: #eaeaea;  
}
```

```
caption {  
    font-family: Verdana, sans-serif;  
    font-weight: bold; font-size: 1.2em;  
    padding-bottom: 0.5em;  
}
```

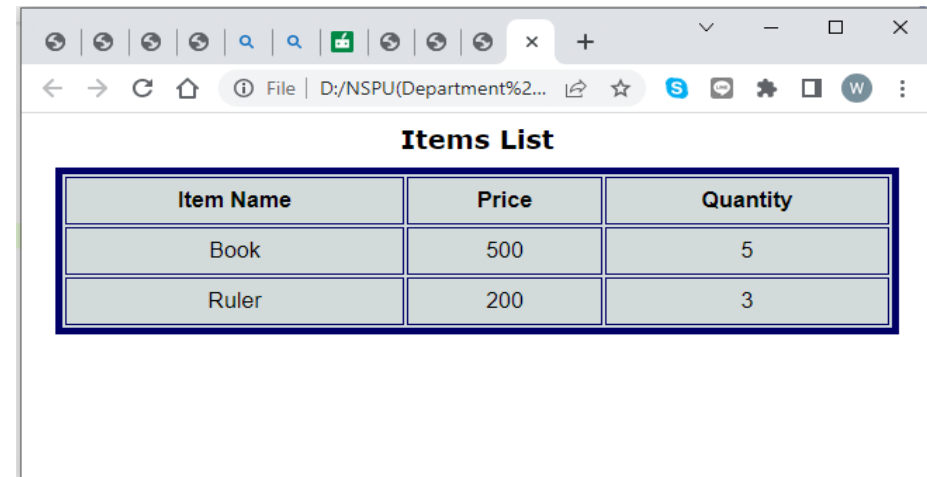

Item Name	Price	Quantity
Book	500	5
Ruler	200	3

CSS3 Structural Pseudo-Classes

- ✓ CSS3 **structural pseudo-class selectors** allow you to select and apply classes to elements based on their position in the structure of the document, such as every other row.
- ✓ CSS3 pseudo-classes are supported by current versions of Firefox, Opera, Chrome, Safari, and Internet Explorer.

CSS3 Structural Pseudo-Classes

Common CSS3 structural pseudo-classes

Pseudo-class	Purpose
:first-of-type	Applies to the first element of the specified type
:first-child	Applies to the first child of an element (CSS2 selector)
:last-of-type	Applies to the last element of the specified type
:last-child	Applies to the last child of an element
:nth-of-type(n)	Applies to the “nth” element of the specified type Values: a number, odd, or even

CSS3 Structural Pseudo-Classes

- ✓ To apply a pseudo-class, write it after the selector. The following code sample will configure the first item in an unordered list to display with red text.


Example for;

```
li:first-of-type { color: #FF0000; }
```

Sample Code CSS

```
table {  
    background-color: rgb(210, 218, 218);  
    margin: auto;  
    width: 600px;  
}  
td, th {  
    padding: 0.5em;  
    font-family: Arial, sans-serif;  
    text-align: center;  
}  
caption {  
    font-family: Verdana, sans-serif;  
    font-weight: bold;  
    font-size: 1.2em;  
    padding-bottom: 0.5em; }
```

```
tr:nth-of-type(even) { background-color: #eaeaea; }  
tr:nth-of-type(odd) { background-color: #94e1e6; }  
tr:first-of-type { background-color: #006;  
    color: #eaeaea; }
```

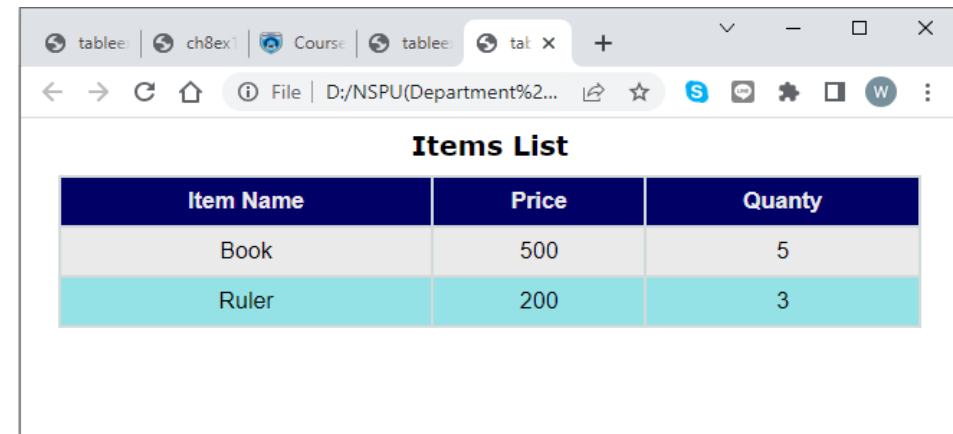

Item Name	Price	Quantity
Book	500	5
Ruler	200	3

Next Lecture

Forms