
#### **Software Design Patterns**

Lecture 4
Builder
Prototype

Dr. Fan Hongfei 9 October 2025

#### **Builder: Problem**

Example: a complex object that requires laborious, step-by-step initialization of many fields and nested objects

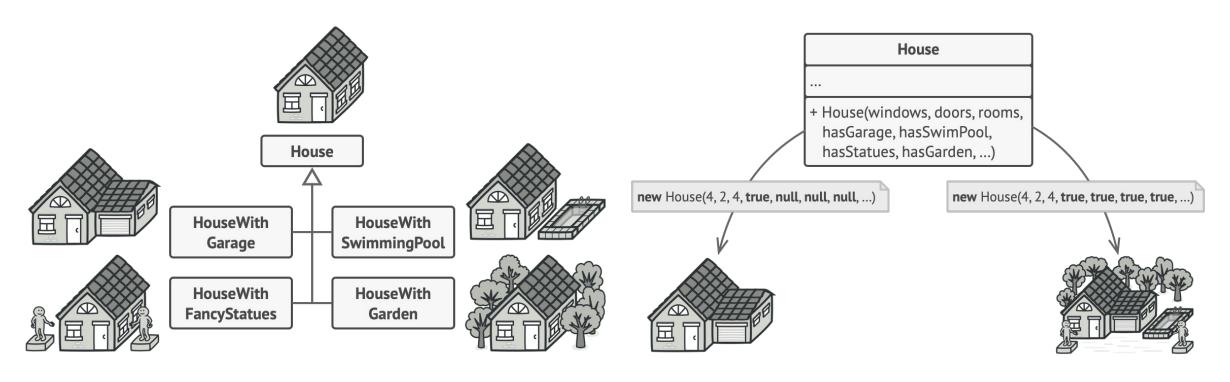


**Problem:** a large number of subclasses

**Problem:** in most cases most of the parameters will be unused

#### **Builder: Solution**

- Extract the object construction code out of its own class and move it to separate objects called builders
  - The builder does not allow other objects to access the product while it is being built
  - Object construction is organized into a set of steps, and call only those steps that are necessary
  - Some construction steps might require different implementation: create different builder classes

# HouseBuilder ... + buildWalls() + buildDoors() + buildWindows() + buildRoof() + buildGarage() + getResult(): House








# **Builder: Solution (cont.)**

- Further extract the series of calls to the builder steps into a separate class called director
  - The director defines the order in which to execute the building steps, while the builder provides concrete implementation
  - Having a director class is not strictly necessary
  - Might be a good place to put various construction routines for reuse
  - Completely hiding the details of construction from the client code

### **Builder: Structure and Example**

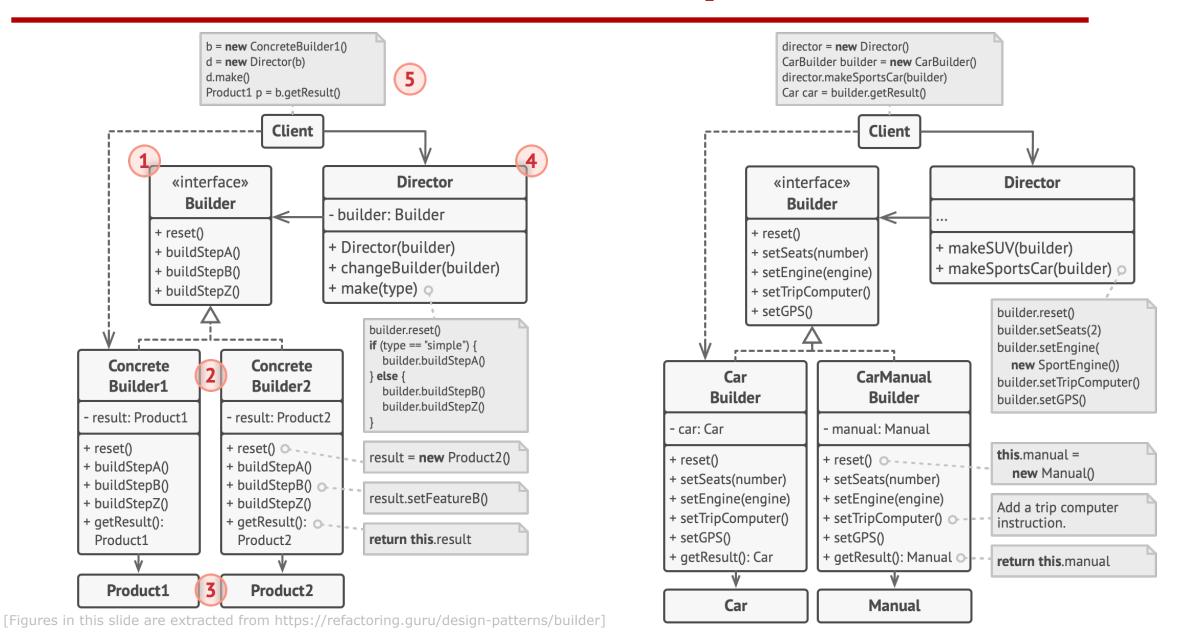

## **Builder: Applicability**

- Get rid of a "telescoping constructor"
  - Build objects step by step, using only those steps that are needed
- When you want your code to be able to create different representations of some products
  - Applied when construction of various representations of the product involves similar steps that differ only in the details
- Construct <u>Composite</u> trees or other complex objects
  - A builder does not expose the unfinished product while running construction steps

# **Builder: Implementation**

- 1. Clearly define the **common construction steps** for building all available product representations
- 2. Declare these steps in the base **builder interface**
- Create a concrete builder class for each of the product representations and implement their construction steps, and also implement a method for fetching the result of construction
- 4. Consider creating a **director class** (not necessarily)
- 5. The client code creates both the builder and the director objects
- 6. The construction result can be obtained directly from the director only if all products follow the same interface; otherwise, the client should fetch the result from the builder

#### **Builder: Pros and Cons**

#### Pros

- Construct objects step-by-step, defer construction steps or run steps recursively
- Reuse the same construction code when building various representations of products
- Single Responsibility Principle

#### Cons

 The overall complexity of the code increases since the pattern requires creating multiple new classes

#### **Prototype: Problem and Solution**


#### Problem: creating an exact copy of an object

- Some fields may not be visible from the outside
- The code becomes dependent on that class
- Sometimes you only know the interface but not the concrete class

#### Solution: the Prototype pattern


- Delegating the cloning process to the actual objects being cloned
- A common interface for all objects supporting cloning, with a single clone method
- An object supporting cloning is called a prototype

## **Prototype: Structure**

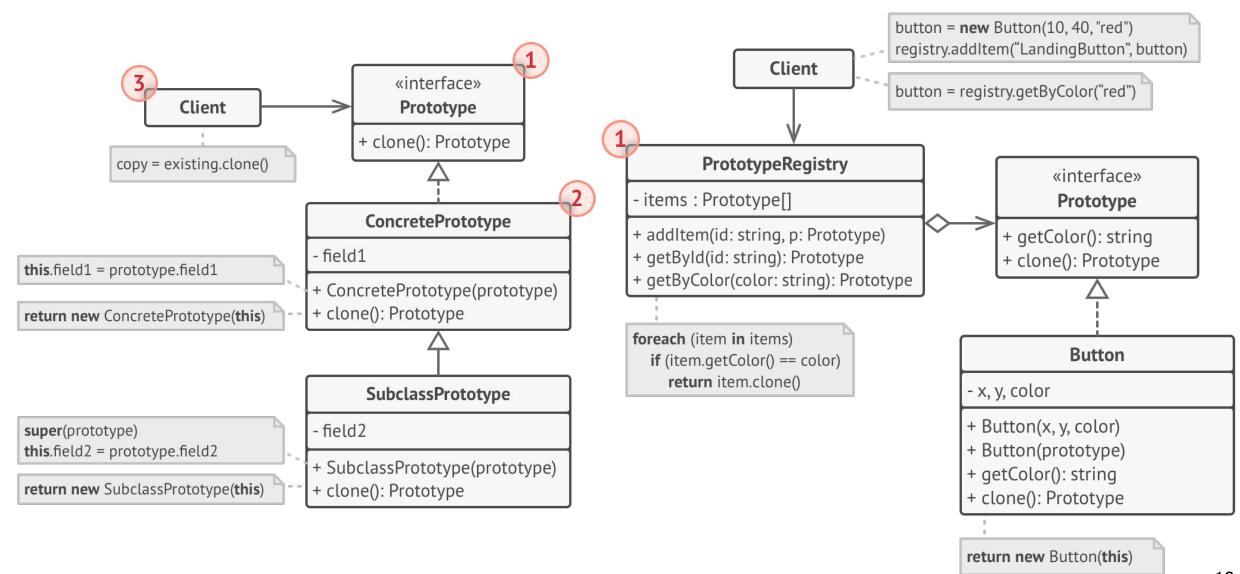

## **Prototype: Example**

Produce exact copies of geometric objects, without coupling the code to their classes

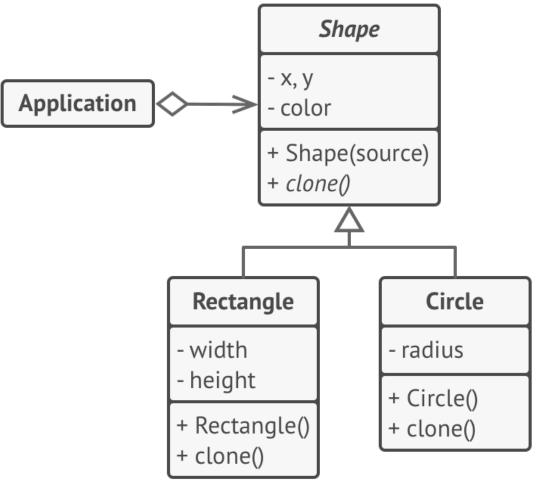

 Note: a subclass may call the parent's cloning method before copying its own field values to the resulting object.

# **Prototype: Applicability**

- When your code should not depend on the concrete classes of objects that you need to copy
  - Your code works with objects passed to you from 3rd-party code via some interfaces, while the concrete classes are unknown
  - This interface makes the client code independent from the concrete classes of objects that it clones
- When you want to reduce the number of subclasses that only differ in the way they initialize their respective objects
  - Use a set of pre-built objects configured in various ways as prototypes
  - Instead of instantiating a subclass, the client can simply look for an appropriate prototype and clone it

## **Prototype: Implementation**

- 1. Create the **prototype interface** and declare the **clone method**, or just add the method to all classes of an existing class hierarchy
- 2. A prototype class must **define the alternative constructor** that accepts an object of that class
  - Call the parent constructor in the subclass
- 3. Implement the clone method by using the **new operator**
- 4. Optionally, create a **centralized prototype registry** to store a catalog of frequently used prototypes
  - Either as a new factory class, or in the base prototype class with a static method

#### **Prototype: Pros and Cons**

#### Pros

- You can clone objects without coupling to their concrete classes
- You can get rid of repeated initialization code in favor of cloning prebuilt prototypes
- You can produce complex objects more conveniently
- You get an alternative to inheritance when dealing with configuration presets for complex objects

#### Cons

 Cloning complex objects that have circular references might be very tricky