



(a) Ordering only; horizontal spacing is schematic

future truth → scoring; future-map validity → population selection (separate chain)

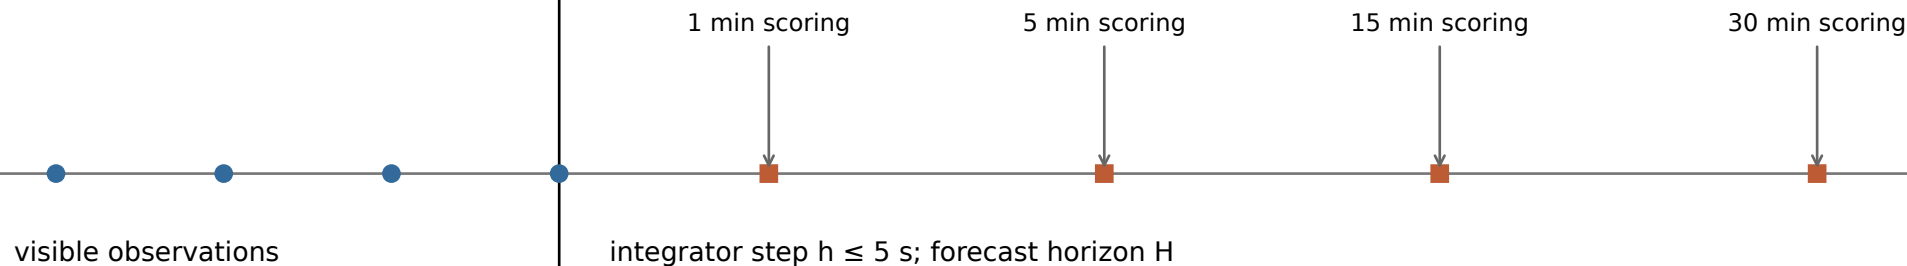

(b) Three-position buffer: observations replaced by simulated positions

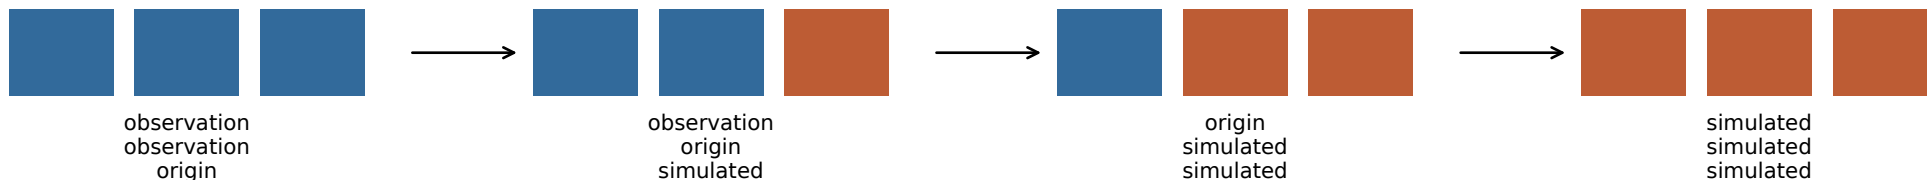

Terrain: updates every 5 s; first secant $d+5$ s, stable span 10 s.

Ordinary method: adjacent τ resampling cadence (Full $\tau=60$ s); scoring events are not history updates.