Reconstruction benchmark

A controlled comparison of accuracy and runtime.

MEAN ERROR
0.029 m

SAMPLES
128

RUNTIME
1.42 s

01 / Error across observation density

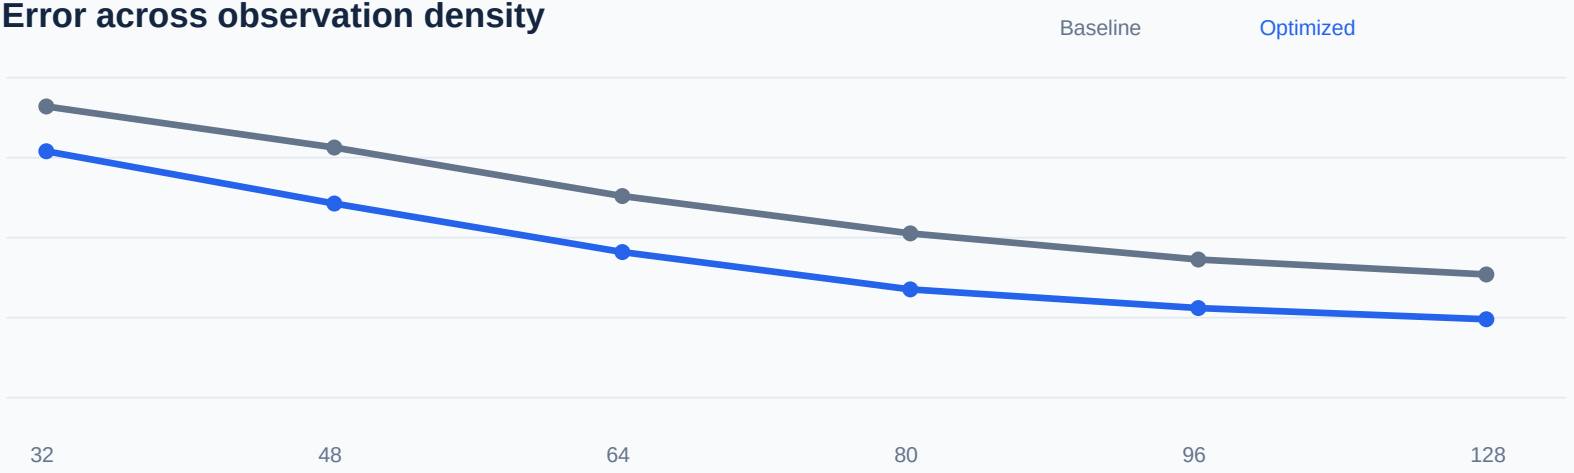

Fictional data - documentation demo only

Findings & next steps

Accuracy improves with denser observations.

1. Compare every run against the same reference trajectory.
2. Review low-texture scenes separately from the average.
3. Record runtime alongside the final error metric.
4. Keep failed runs in the report rather than removing them.

FOLLOW-UP QUESTION

Does the improvement hold when observations are partially occluded?