


	0	1	
	1		
	2		
	3	4	

find all 0

Classic Approach

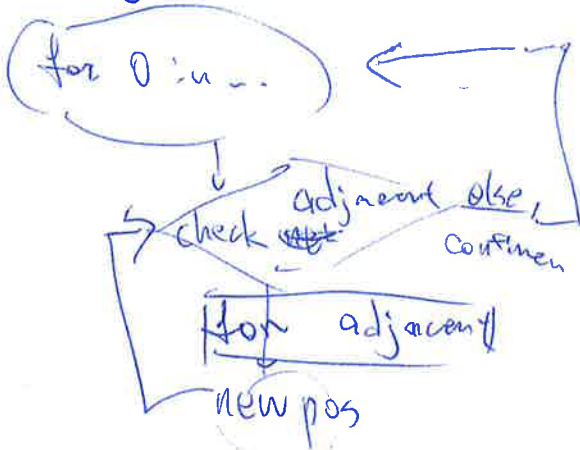


- "0": (0,0), (0,1), (0,2), (0,3)
- "1": (0,1), (1,0)
- "2": (0,2), (1,1)
- "3": (0,3), (1,2)
- "4": (1,3)

0	1	2	3
1	2	3	4
8	7	6	5
9	8	7	6

row

- "0": (0,0)
- "1": (0,1), (1,0)
- "2": (0,2), (1,1)
- "3": (0,3), (1,2)
- "4": (1,3)
- "5": (2,3)
- "6": (2,2), (3,3)
- "7": (2,1), (3,2)
- "8": (2,0), (3,1)
- "9": (3,0)

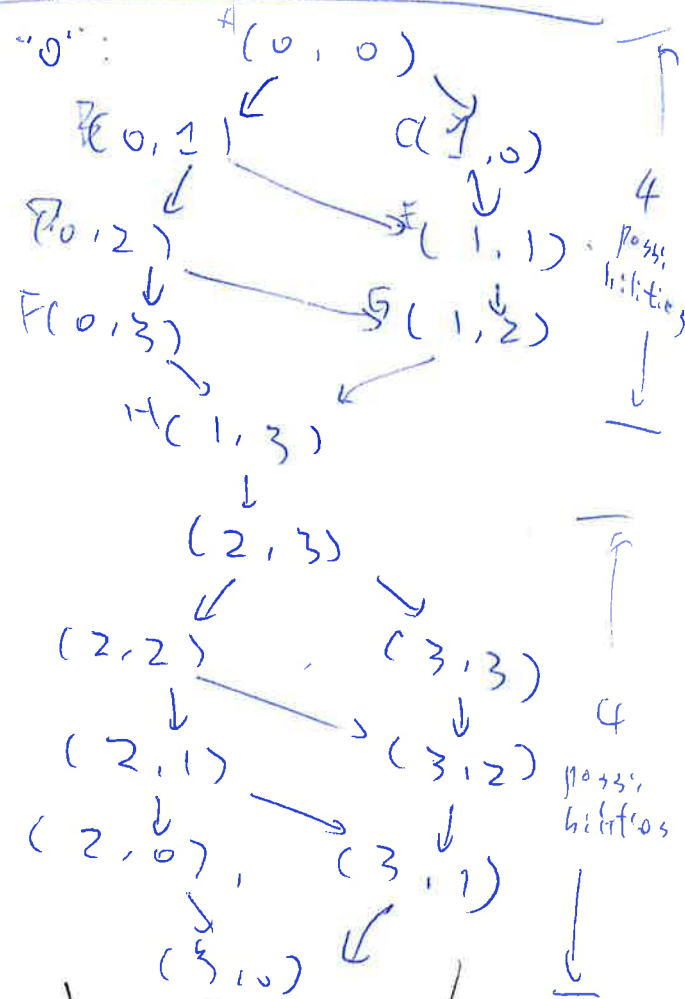

4 possibilities


4 possibilities

4 x 4 = 16

possibilities

get-coords()

construct-graph()

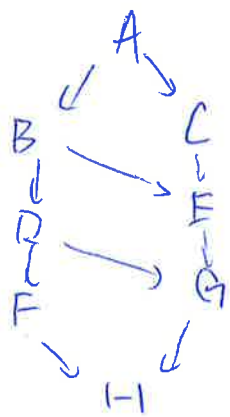

g: {
 "A": {B, C} — A B D
 B: {D, E} — A C
 C: {E}
 D: {F, G}
 E: {G}
 F: {G, H}
 G: {H}

— count_paths()

get_position()

"0": (0,0,0)
 "1": (0,0,0)

dict {list(tuple)}

tuple is hashable

construct_graph()

check_adjacent()

dict { — (tuple) } use str

"0" (0,0): { (0,1) (1,0) }

(0,1): { (0,2), (1,1) }

0	1	2
1	2	

(0,1)

(2,1)

(0,2) (1,1)

diag flip

[0,1,2]
 [2,1,1]

0 2

1 1

2 1