


Three Agent loop strategies as rollout pipes

Each lane separates its inner interaction pipe from its outer runtime; the return arrow is the rollout boundary from t to $t + 1$.

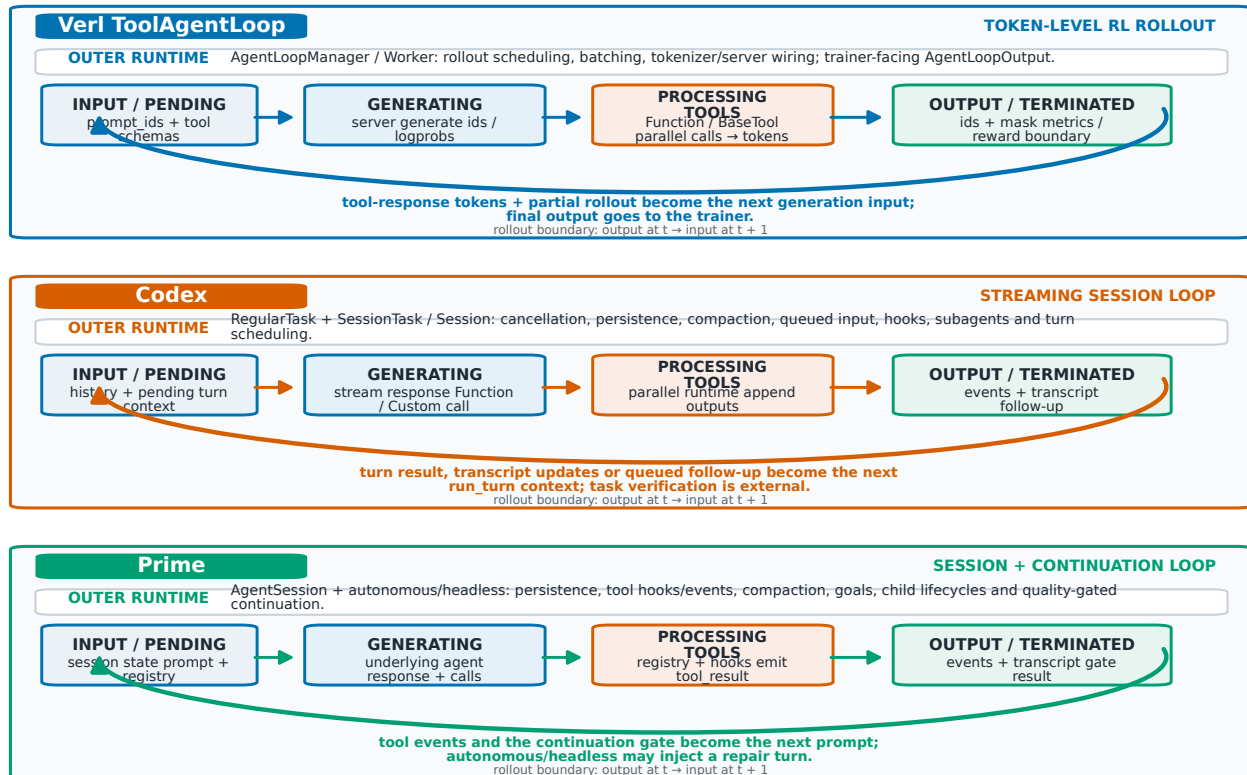

nanoGPT: runner.ts currently spans the pipe, session persistence, and verification. Target split: AgentLoop → SessionRunner → harness verifier.

Color is redundant with explicit state labels; arrows encode control flow, not performance or reward magnitude.