
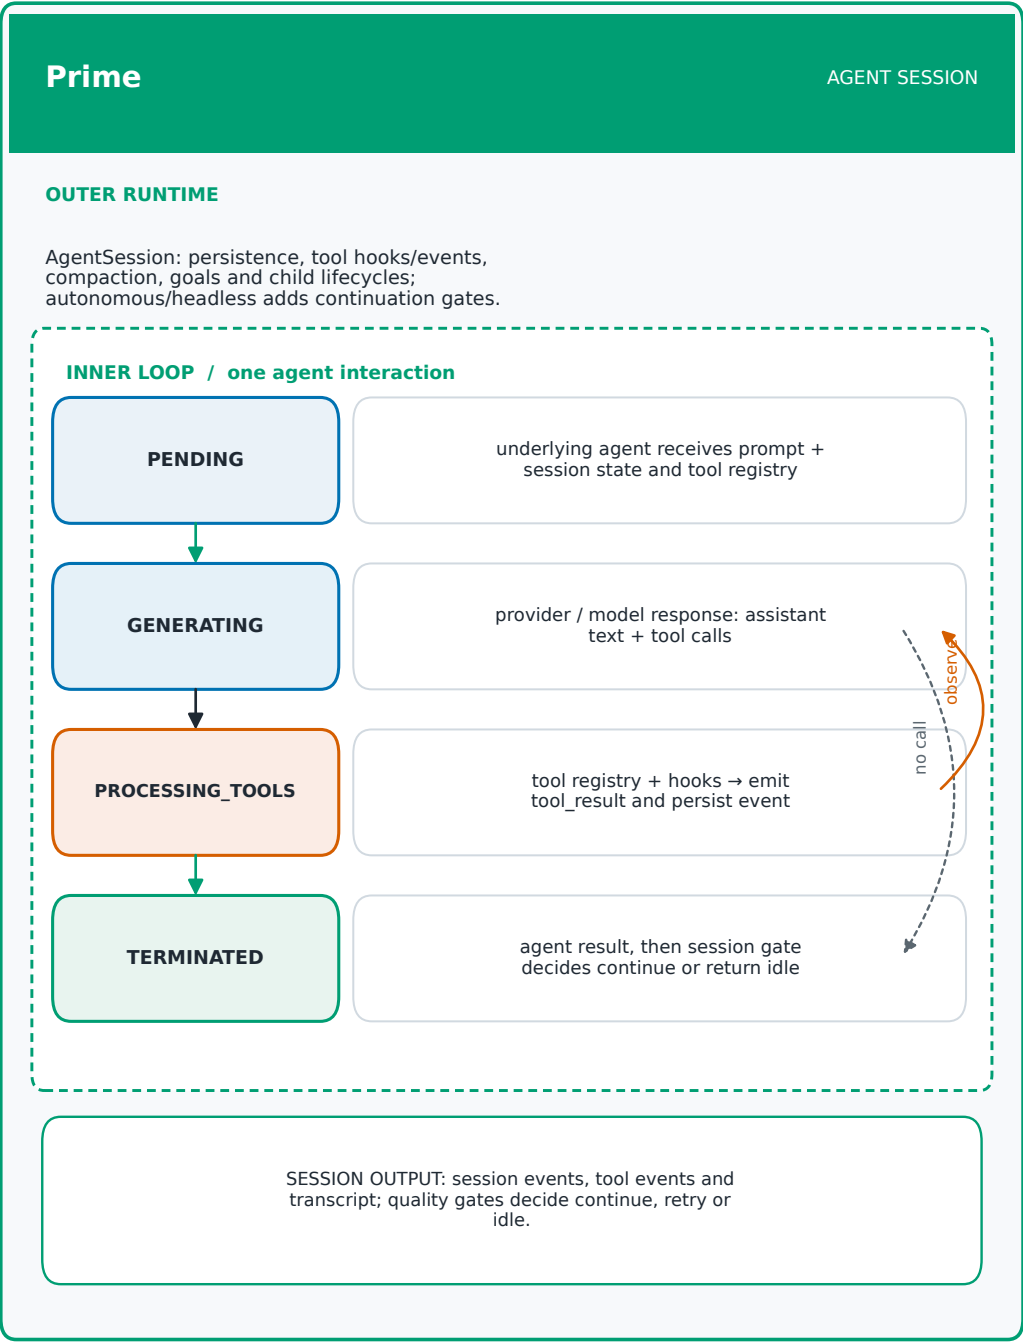
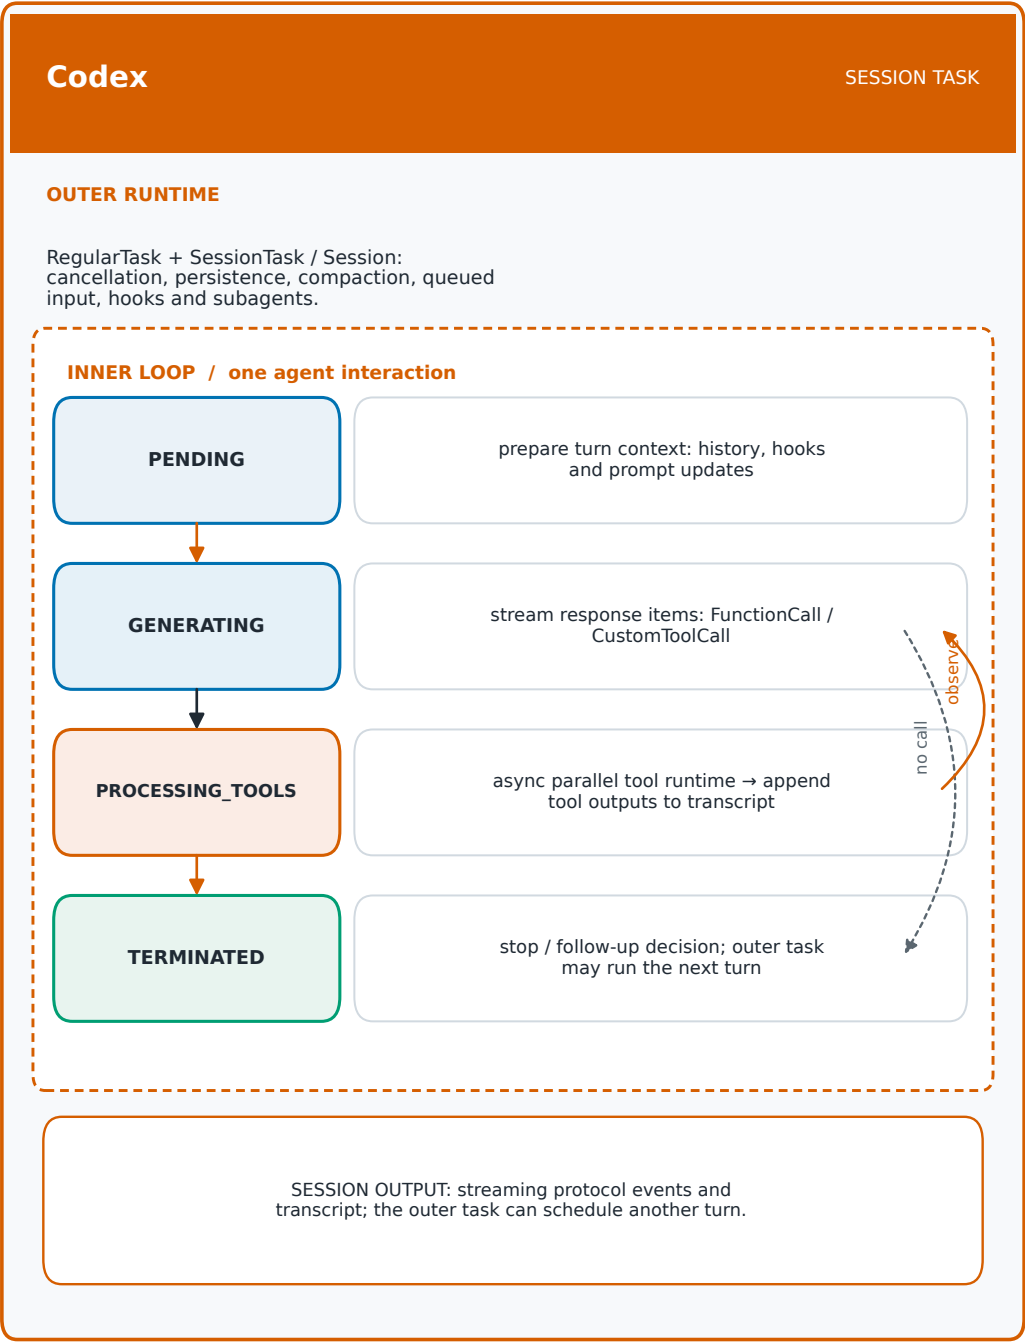
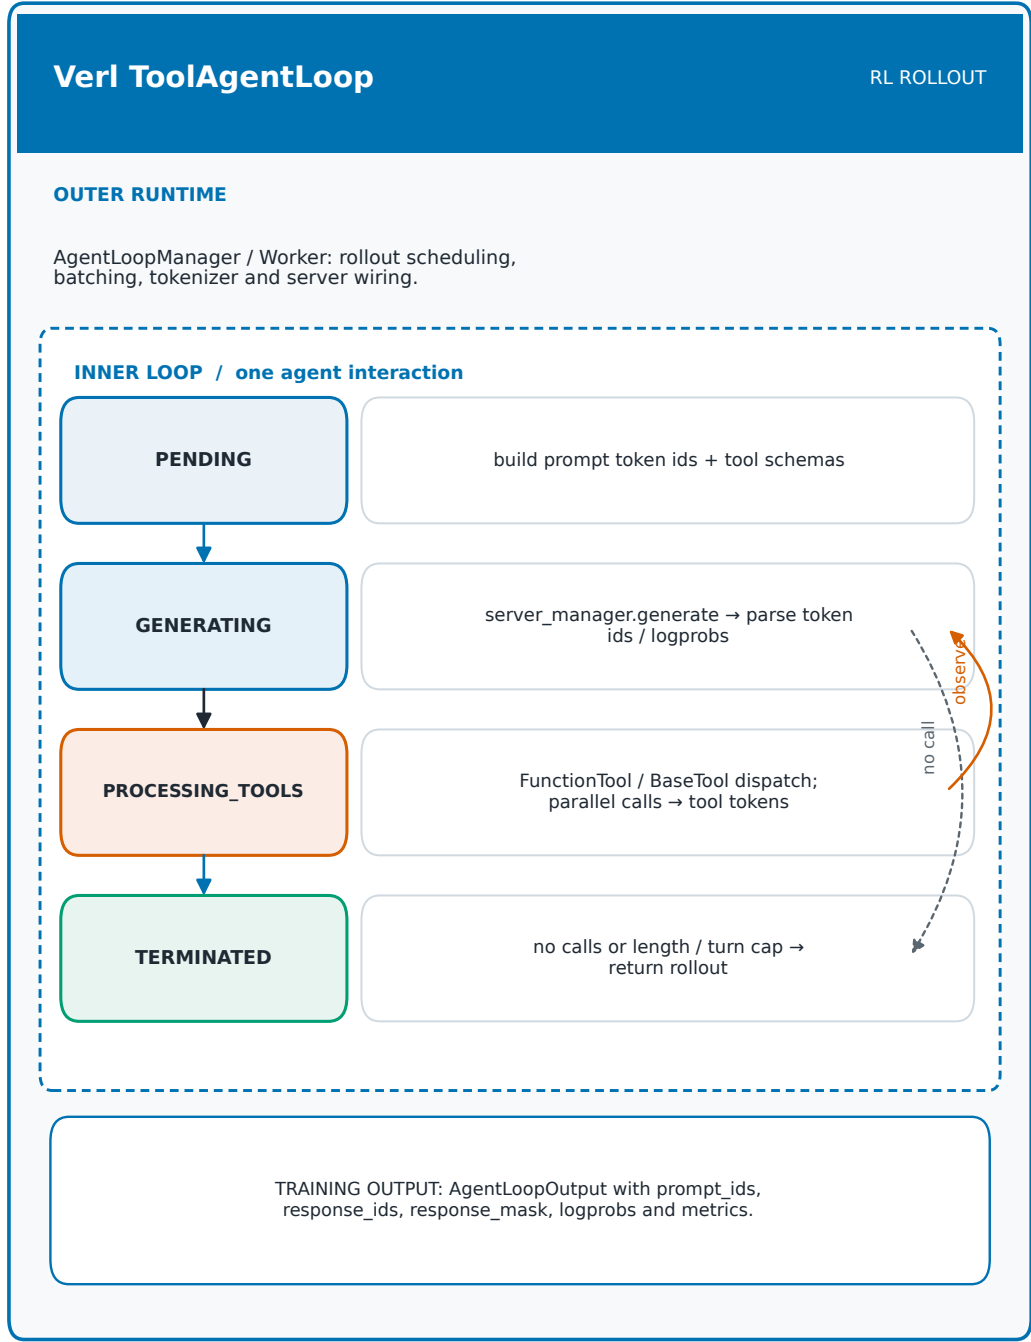


Agent loop strategies and runtime boundaries

The same interaction semantics are split differently: Verl is token-level and rollout-facing; Codex and Prime place lifecycle policy around the turn loop.

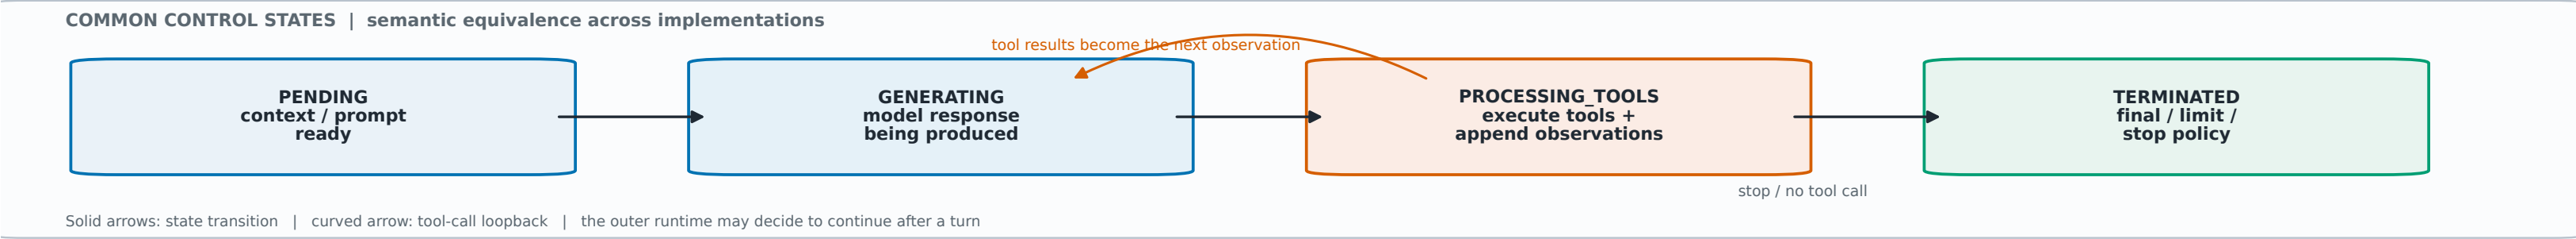

Boundary note for nanoGPT: runner.ts currently spans the inner interaction loop plus session state/persistence and task verification. A cleaner target split is inner AgentLoop → outer SessionRunner → harness verifier; Verl's reward/task verifier remains an external concern unless returned as an observation.