

Adapting a Latent Audio Diffusion Model to Historical Guqin Recordings: A Listening-Driven Case Study

Huanchen Cai

Division of Speech, Music and Hearing (TMH)
KTH Royal Institute of Technology, Stockholm, Sweden
huanchen@kth.se

October 2026

Abstract

We report a small-data case study in adapting a pretrained latent audio diffusion model to the guqin, the seven-string Chinese zither, aiming at an “AI radio” that plays guqin-style music without end. From a library of historical recordings we curate 412 solo performances (42.5 h, 61 performers) and split them by composition. We fine-tune a rank-16 DoRA adapter on Stable Audio 3 Medium using its continuous latents, masking weighted towards continuation, captions that combine researched notes on each piece with mood tags and an automatically estimated pentatonic mode, and random-length crops, stopping when held-out loss stops improving. Seven blind listening studies by one expert listener guided every decision. The final adapter was rated highest for continuing unseen pieces (3.9/5, against 3.4 for the best earlier adapter) and 4.6/5 for generating from free-written scene descriptions. Negative results are equally informative: a from-scratch autoregressive model over the same latents produced no recognisable timbre, a signal-level friction-noise measure correlated with the listener’s complaints in the wrong direction, and a pentatonic-fit measure tracked ratings overall but barely within a group of candidates. Chaining continuations for long playback exposed a silent tail on every generated clip and a loudness feedback loop, both with simple fixes. With one listener and at most ten clips per condition, no paired difference is statistically significant; we present an exploratory record of what helped, what did not, and why.

Keywords: guqin, music generation, latent diffusion, low-resource fine-tuning, listening evaluation

1 Introduction

The guqin (古琴) is a seven-string fretless zither with a documented history of more than two thousand years and an exceptionally rich written tradition: its repertoire survives in hundreds of handbooks written in *jianzipu* (减字谱), a tablature that records finger actions rather than pitches and rhythms. Three kinds of sound define its idiom: open strings (*sanyin*), harmonics (*fanyin*) and stopped notes (*anyin*), the latter shaped by left-hand slides and vibrato (吟猱绰注) whose passing semitones and friction noise are part of the style rather than errors. The repertoire is predominantly pentatonic, and the best-known performances survive as mid-twentieth-century recordings with tape hiss and limited bandwidth.

Computational guqin research. Engineering work on the guqin has so far concentrated on analysis, notation and synthesis rather than on generation; Hui (2024) reviews its development in the digital humanities. On the acoustic side, Penttinen et al. (2006) built a model-based synthesiser using commuted digital waveguides that reproduces inharmonicity, glides, harmonics and the friction sound of sliding fingers, and Liu et al. (2024a) describe the construction of an acoustic dataset of the instrument. For performance analysis, Huang et al. (2020) jointly model mode and playing technique on note-annotated historical recordings (GQ39); GuqinSonGest (Han et al., 2025) provides audio and video of playing techniques derived from a ninth-century treatise; and Zhang et al. (2025) apply machine learning to technique analysis. Technique detection for the related guzheng (Li et al., 2022) shows the same need for onset-aware modelling of plucked Chinese zithers. A second strand digitises jianzipu: image recognition of historical scores (Chen, 2025), zero-shot recognition of its open, compositional glyph system (Li et al., 2026), language-model-based transcription of note durations (Shi et al., 2024), pitch generation from string and *hui* positions (Wang et al., 2025), deep-learning restoration of guqin music from notation (Kuremoto et al., 2024), and a symbolic dataset of transcribed scores (lukewys, 2019). Interactive and embodied systems complete the picture: projected augmentation for learning (Zhang et al., 2015) and, recently, robotic guqin playing (Zhang et al., 2026; Wang et al., 2026). To our knowledge no published work generates guqin *audio* with a modern neural generative model.

Neural audio generation. Latent diffusion models such as Stable Audio (Evans et al., 2024a), Stable Audio Open (Evans et al., 2024c) and Stable Audio 3 (Evans et al., 2026) generate variable-length audio in the latent space of an autoencoder and support inpainting and continuation; training window length matters for musical structure (Evans et al., 2024b). Autoregressive token models such as MusicGen (Copet et al., 2023) and live streaming models (Lyria Team et al., 2025) generate indefinitely by construction, while continuous-latent autoregression with a diffusion or flow head (Li et al., 2024) avoids quantisation, and context noise augmentation reduces error accumulation (Pasini et al., 2024). These models are trained mostly on Western popular and library music, which is a poor prior for an instrument whose idiomatic noises and semitones are concentrated in specific gestures. Low-rank adaptation (Hu et al., 2021; Liu et al., 2024b) makes it possible to adapt them with tens of hours of audio, and repeating data for several epochs is nearly as useful as fresh data when data are scarce (Muennighoff et al., 2023). For generated music, replication of training material is a central concern (Batlle-Roca et al., 2024).

This work. Our goal is an “AI radio”: a system that keeps producing guqin-like music for hours, either continuing a recorded opening or following a short description of a scene. We adapt Stable Audio 3 Medium to 42.5 h of screened historical solo recordings and let a guqin-literate listener judge every step. The contributions are: (i) a curation and evaluation protocol for a small historical corpus, with composition-level splits and blind listening with free-text comments; (ii) a fine-tuning recipe with continuation-weighted masking, captions combining researched notes on each piece with mood tags and an estimated pentatonic mode, random-length crops and early stopping; (iii) seven listening studies, including clear negative results for a from-scratch latent language model and for two automatic quality measures; and (iv) two failure modes of chained continuation for long playback, with fixes.

2 Method

2.1 Data

The source is a personal collection of 638 historical guqin recordings (44.1 kHz, 16-bit stereo CD transfers). Every candidate was screened through whole-track listening; recordings were excluded for audible noise floors, ensembles or other instruments, applause and voice. The result is a set $\mathcal{R}$ of **412 solo recordings by 61 performers (42.5 h)** with 108 distinct titles after normalising numbered variants. Performer coverage is uneven: the five most represented performers account for about 40% of the duration.

Recordings are grouped by composition and the groups are randomly assigned to training, validation and test ($|\mathcal{R}_{\text{tr}}| = 329$, $|\mathcal{R}_{\text{va}}| = 42$, $|\mathcal{R}_{\text{te}}| = 41$), so that no version of an evaluated composition is heard in training. Each recording x of length N samples is covered by $\lceil N/W \rceil$ aligned windows of the model’s native length $W = 2,641,920$ samples (59.9 s), the last window ending at the end of the recording; this gives 2,764 windows (2,217/276/271), of which nine windows of digital silence are dropped. The final model trains on $\mathcal{R}_{\text{tr}} \cup \mathcal{R}_{\text{te}}$ (370 recordings) and keeps $\mathcal{R}_{\text{va}}$ for early stopping and listening.

2.2 Latent representation and generator

A frozen autoencoder (SAME-L) maps a stereo window x to a latent sequence

$$\mathbf{z} = E(x) \in \mathbb{R}^{T \times 256}, \quad T = W/4096 = 645, \quad (1)$$

about 10.8 frames per second, and a decoder D maps latents back to audio. The generator of Stable Audio 3 Medium (Evans et al., 2026) is a diffusion transformer (Peebles and Xie, 2022) v_θ trained with a rectified-flow objective (Liu et al., 2022). With $\epsilon \sim \mathcal{N}(0, I)$ and $t \in [0, 1]$,

$$\mathbf{z}_t = (1 - t) \mathbf{z} + t \epsilon, \quad (2)$$

and the network predicts the velocity $\epsilon - \mathbf{z}$ conditioned on text c , on the duration ℓ and on an inpainting mask $\mathbf{m} \in \{0, 1\}^T$ ($m_i = 1$ for frames that are given):

$$\mathcal{L}(\theta) = \mathbb{E}_{\mathbf{z}, t, \epsilon, \mathbf{m}} \|v_\theta(\mathbf{z}_t, t, c, \ell, \mathbf{m} \odot \mathbf{z}, \mathbf{m}) - (\epsilon - \mathbf{z})\|_2^2. \quad (3)$$

The mask is drawn from a mixture of three types: random spans, a fully masked sequence (unconditional generation) and a given prefix (continuation),

$$P(\text{span}, \text{full}, \text{prefix}) = (0.1, 0.3, 0.6), \quad (4)$$

which we changed from the default of the released Stable Audio 3 training code, (0.1, 0.8, 0.1), so that most training examples resemble continuation, our main use. At inference the step-distilled Medium model integrates the flow in 8 steps.

2.3 Adaptation

We train a DoRA adapter (Liu et al., 2024b) on the non-distilled *base* model and apply it to the distilled model at inference, following the released recipe. For a frozen weight $W_0 \in \mathbb{R}^{d \times k}$, DoRA learns a low-rank update and a per-row magnitude,

$$W' = \mathbf{g} \odot \frac{W_0 + \frac{\alpha}{r} BA}{\|W_0 + \frac{\alpha}{r} BA\|_{\text{row}}}, \quad B \in \mathbb{R}^{d \times r}, \quad A \in \mathbb{R}^{r \times k}, \quad (5)$$

with $r = \alpha = 16$ (21.6 M trainable parameters). All latents are pre-encoded once.

2.4 Text conditioning

For each composition we compiled a short narrative from published notes on the piece (for example *Liushui*, Boya and his true listener Ziqi; *Guangling San*, Nie Zheng’s revenge and Ji Kang’s last performance) and assigned two to five tags from a closed vocabulary $\mathcal{V}$ of 37 moods and scenes (e.g. *calm, lonely, vast, reclusive, autumn, river, frontier desert*); 55 notes are well sourced, 31 partly and 22 inferred from the title. A pentatonic mode is estimated for every window as follows. Spectral peaks k between 60 Hz and 2 kHz, with magnitudes a_k and frequencies f_k , are folded into a 120-bin pitch-class histogram (10-cent bins),

$$h(b) = \sum_k a_k \mathbf{1} \left[\left\lfloor \frac{1}{10} \left(1200 \log_2 \frac{f_k}{440} \bmod 1200 \right) \right\rfloor = b \right], \quad (6)$$

the tuning offset of the historical recording is estimated as $o^* = \arg \max_{o \in \{0, \dots, 9\}} \sum_{j=0}^{11} \sum_{\delta=-1}^1 h(10j + o + \delta)$, and the folded 12-class profile $p(j) \propto \sum_{\delta=-5}^4 h(10j + o^* + \delta)$ defines the pentatonic fit and the *gong* (tonic) pitch

$$F = \max_r \sum_{s \in P} p((s+r) \bmod 12), \quad r^* = \arg \max_r \sum_{s \in P} p((s+r) \bmod 12), \quad P = \{0, 2, 4, 7, 9\}. \quad (7)$$

Each window receives one caption style by a stable hash: 40% tags and mode, 40% narrative, tags and mode, and 20% narrative only, in English with the Chinese text appended (at most 160 tokens of the 256-token encoder limit); the trainer additionally replaces 10% of captions by the empty string.

2.5 Training

Each sample keeps a random span of the window,

$$L \sim \mathcal{U}\{L_{\min}, \dots, T\}, \quad s \sim \mathcal{U}\{0, \dots, T - L\}, \quad L_{\min} = 215 \text{ (20 s)}, \quad (8)$$

pads the rest with the latent of silence, and sets the duration condition to $\ell = L/10.77$ s. One pass is 2,500 steps of batch size 1 (about one epoch), AdamW with learning rate 10^{-4} . After pass n we compute the validation loss at five fixed noise levels $\tau \in \{0.1, 0.3, 0.5, 0.7, 0.9\}$ over all validation windows,

$$V_n = \frac{1}{5} \sum_{\tau} \frac{1}{|\mathcal{W}_{\text{va}}|} \sum_{w \in \mathcal{W}_{\text{va}}} \mathcal{L}_{\tau}(\theta_n; w), \quad (9)$$

and stop at the first pass n with $n - \arg \min_{k \leq n} V_k \geq 3$, keeping $\theta^* = \theta_{\arg \min_k V_k}$. Checkpoints every 500 steps make the run resumable.

2.6 Inference and long playback

Continuation keeps a 10 s opening ($\mathbf{m} = 1$ on its frames) and generates the next 25 s; text-only generation produces 35 s from a description with $\mathbf{m} = 0$. For long playback, segment k is generated from the last 15 s of the piece so far, C_k . Because generated clips end in a short silent tail, each segment is over-generated by 3 s and only the 30 s that follow the context are kept; and because levels drift upwards from segment to segment (Section 3.3), the context is fed at a fixed level and the new part is matched to the context:

$$g_k = \frac{\rho}{\text{RMS}(C_k)}, \quad y_k = \frac{1}{g_k} G(g_k C_k)_{[15, 45] \text{ s}}, \quad \hat{y}_k = y_k \cdot \frac{\text{RMS}(C_k)}{\text{RMS}(y_k)}, \quad \rho = 10^{-16/20}, \quad (10)$$

where G denotes 48 s generation conditioned on the given context; consecutive segments are joined with a 0.1 s crossfade.

2.7 Baseline: a latent language model

As an alternative to adapting a large generator, we trained a causal transformer from scratch that predicts the next latent frame. With context noise augmentation (Pasini et al., 2024), $\tilde{\mathbf{z}}_{<i} = \mathbf{z}_{<i} + \sigma \boldsymbol{\eta}$ with $\sigma \sim \mathcal{U}(0, 0.5)$ on half of the samples, the transformer produces a state $\mathbf{h}_i = f_\phi(\tilde{\mathbf{z}}_{<i}, \sigma)$ and a flow-matching head u_ψ samples the frame (Li et al., 2024):

$$\mathcal{L}(\phi, \psi) = \mathbb{E} \|u_\psi((1-t)\boldsymbol{\epsilon} + t\mathbf{z}_i, t, \mathbf{h}_i) - (\mathbf{z}_i - \boldsymbol{\epsilon})\|_2^2. \quad (11)$$

The model has 8 layers of width 512 and a 6-block AdaLN MLP head of width 1024 (72 M parameters), and is trained on 1.42 M frames of the training split with sequences of 512 frames.

2.8 Evaluation

All listening was done by a single professional listener with extensive experience of the guqin repertoire, on local web pages in a fixed format: candidates for the same opening and seed are shuffled and unlabelled; each clip gets an overall score from 1 to 5, optional issue tags (e.g. *too many semitones*, *sawing/metallic noise*, *not guqin-like*, *no melody*, *abrupt seam*) and free-text comments; the mapping is revealed only after rating. Openings come from compositions that the compared models did not train on, with different performers and pieces across studies where possible. For paired score differences $d_1, \dots, d_n$ over openings we report the exact two-sided sign-flip permutation test

$$p = 2^{-n} \sum_{\mathbf{s} \in \{\pm 1\}^n} \mathbf{1} \left[\left| \frac{1}{n} \sum_i s_i d_i \right| \geq |\bar{d}| \right] \quad (12)$$

and percentile bootstrap intervals of means; with eight or fewer pairs these tests have little power and we treat them as descriptive.

Two automatic measures were tested against the ratings. The *noisy-frame fraction* is the share of active frames (within 45 dB of the clip maximum) whose 2.5–10 kHz band has spectral flatness above 0.25 and lies within 30 dB of the 60–2500 Hz band, aiming at the listener’s “sawing” complaints. The *pentatonic fit* F of Eq. (7) is computed on generated audio, and its onset-restricted variant counts the share of note onsets whose attack pitch, estimated 30–120 ms after a spectral-flux peak by harmonic summation $S(n) = \sum_{q=1}^5 0.8^{q-1} |X(qf_n)|$ over semitones n , falls outside the opening’s mode.

3 Results

3.1 System performance

The final adapter is the pass-14 checkpoint of the 370-recording run (Figure 1): validation loss fell from 0.6020 for the unadapted model to 0.5950, and the three following passes did not improve on it. Training took 45.9 min per pass (2,500 steps plus validation of 276 windows) on a single consumer GPU (NVIDIA RTX 5070 Ti, 16 GB), and 13 h for the 17 passes. At inference the adapter generates 35 s from text in 4.1 s (8.6 times faster than real time) and continues a 10 s opening by 25 s in 6.0 s, with a peak of 6.5 GB of GPU memory.

In the final listening study (R7 in Table 1) the adapter scored a mean of **3.88** for continuing eight unseen validation compositions, against 3.38 for the best previous adapter and 2.75 for an early checkpoint of the same run, and **4.60** for five scene descriptions written after training, against 3.60 for the early checkpoint. It received no “sawing” tags. One take (“sunset over a misty lake; an old fisherman rows home, singing quietly to himself”) was singled out by the listener as exceptional and was extended to 3.5 minutes by chained continuation (Section 3.3).

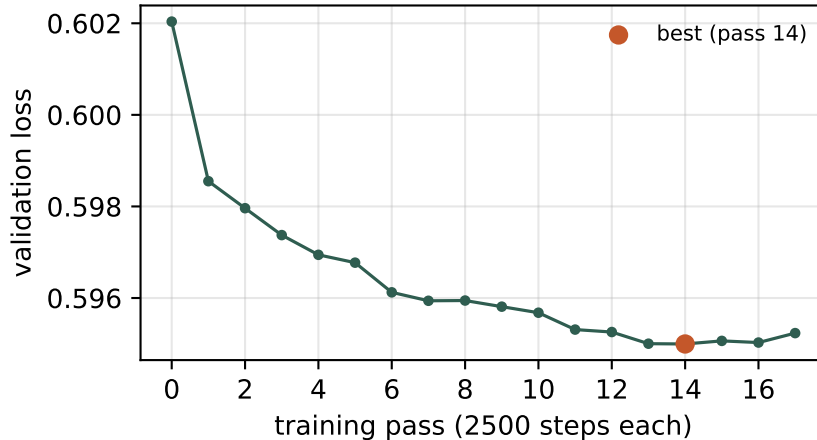


Figure 1: Validation loss per training pass of the final run (276 held-out windows, five fixed noise levels).

3.2 Listening studies

Table 1 summarises the seven studies in the order they were run; each study answered a question raised by the previous one.

Masking and data (R1). With 329 training recordings, the continuation-weighted mask did not beat the released default mixture (2.62 against 2.88), and the two seeds differed by 1.6 points on average (2.17 against 3.75), more than any model difference.

Inference settings (R2). Lowering adapter strength or restricting the adapter to the early, high-noise steps changed the mean by at most 0.1. Running the base model for 50 steps, the configuration that matches training, was clearly worse (2.70, five scores of 1, comments about extra instruments). The mean per opening-and-seed group ranged from 1.0 to 4.75.

Text conditioning (R3). Training with mood tags left continuation unchanged (matching and deliberately opposite tags both scored 4.0) but improved generation from text alone from 2.0 to 3.8 ($p = 0.06$, $n = 5$).

From-scratch latent language model (R4). Validation loss of the baseline reached its minimum at 10k steps and rose by 8% by 40k steps (Figure 2). All 11 of its clips, including continuations, 5-minute endless generation and unconditioned generation, received the lowest score, with comments such as “no timbre at all”; the SA3 adapter scored 2.0 on the same openings.

Training length and mode (R5, R6, R7). On the 329-recording split, held-out loss decreased monotonically over three passes (0.5387 for the base model, then 0.5351, 0.5343 and 0.5337), and neither tags nor mode text changed it. Listening favoured three passes with tags and mode (4.12 against 3.75 for one pass, $p = 0.50$). The story-caption run was rated below that adapter after two passes (3.00 against 3.50) but above it after fourteen (3.88 against 3.38, $p = 0.63$; against pass 2, $p = 0.16$). Bootstrap 95% intervals of these means span about two points (pass 14: [2.75, 4.75]).

Study	Condition	<i>n</i>	Mean score
R1 masking	released default mask (10/80/10) / continuation mask (10/30/60) / 412 recordings, continuation mask	8	2.88 / 2.62 / 3.38
R2 inference	adapter strength 1.0 / 0.7 / adapter on early steps only	9–10	3.56 / 3.60 / 3.67
R3 captions	base model with 50 steps / earlier 222-clip adapter continuation: no text in training / no prompt / matching / opposite tags	10 9	2.70 / 3.10 3.89 / 3.56 / 4.00 / 4.00
	text only: adapter trained without / with captions	5	2.00 / 3.80
R4 latent LM	from-scratch latent LM / SA3 adapter	11 / 6	1.00 / 2.00
R5 length	1 pass / 3 passes + tags / 3 passes + tags + mode	8	3.75 / 3.75 / 4.12
R6 narratives	pass 2 / adapter C from R5	7 / 8	3.00 / 3.50
R7 final	continuation: pass 14 / pass 2 / adapter C	8	3.88 / 2.75 / 3.38
	scene descriptions: pass 14 / pass 2	5	4.60 / 3.60

Table 1: Overview of the listening studies (scores 1–5, single expert listener). In R1 the 412-recording adapter had seen the validation compositions; all other comparisons use openings unseen by every compared model, except R2 (see the limitations in Section 4).

Automatic measures. The noisy-frame fraction correlated with the score in the wrong direction (Spearman $\rho = +0.39$ over 48 clips), and the nine clips tagged as sawing had *lower* values than the rest (0.0006 against 0.0017). The pentatonic fit tracked scores over 124 rated clips ($\rho = 0.52$, positive in each study) but only weakly among candidates for the same opening ($\rho = 0.31$ after removing group means); choosing the best-fitting candidate raised the mean from 3.41 to 3.52, discarding the worst raised it to 3.58. The onset-restricted variant was weaker still ($\rho = 0.19$ within groups), although generated clips did place more onsets outside the mode than real recordings (33% against a median of 22%; 39% in clips flagged for semitones).

Rater consistency. Fifteen clips from R6 were rated again, unknowingly, in R7: six scores were identical, twelve within one point, and the mean absolute difference was 0.8.

3.3 Long playback by chained continuation

Extending the favourite take exposed two problems. Every generated clip ends with about 0.5 s of digital silence (-87 dBFS) as the requested duration runs out; fed back as context, the tail made the model insert a further two seconds of silence at every seam. And each segment came out slightly louder than its context, so that over six rounds the level rose from -10 to -5.5 dBFS with up to 10% of samples clipped. Tail trimming and level locking (Section 2.6) removed the gaps and kept a 3.5-minute piece between -13.8 and -16.7 dBFS per 30 s with no clipping. Of two locked chains the listener accepted one and rejected the other for a sudden breakdown after 82 s.

4 Discussion

Randomness dominates; selection is part of the system. In every study the opening and the random seed moved scores more than any setting we varied. The same semitone often appeared at the same second in all candidates sharing an opening and seed, which locates the error in the sampled trajectory rather than in a particular adapter. For a radio this has a practical consequence: generating several takes and choosing among them is not an afterthought but a component of the

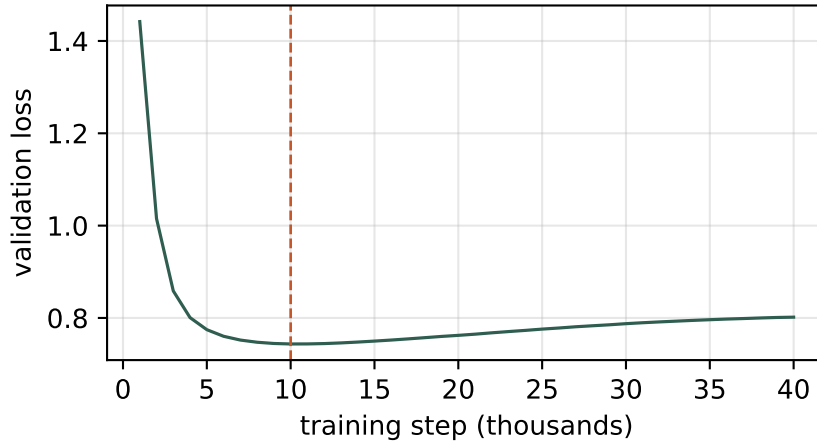


Figure 2: Validation loss of the from-scratch latent language model; it rises after 10k steps (dashed line).

system, and the quality of that choice is bounded by the quality of the selection criterion, which we did not yet find automatically.

The pretrained prior carries the timbre. The from-scratch latent language model produced no recognisable guqin at all, even though the same decoder renders guqin well from encoded recordings. Sampling 256-dimensional frames one at a time from 1.4M training frames left the trajectory off the region of latent space that the decoder renders as guqin; noise augmentation of the context did not prevent it, and its validation loss began to rise after 10k of 40k training steps. Adapting a generator pretrained on far more audio, by contrast, kept timbre largely intact from the first adapter on: the listener’s complaints were about melody and noise, not about the instrument. In a domain of tens of hours, the question is not which architecture to train but which prior to adapt. A related lesson concerns the two Stable Audio 3 models: the base model, which matches the training configuration of the adapter, rendered worse than the distilled model, which the adapter was never trained on.

What text does and does not control. Captions had no measurable effect on held-out loss and none on continuation, where the ten-second opening determines key, register and texture. They mattered only when there was no opening: text-only generation improved from 2.0 to 3.8 after training with mood tags, and the narrative captions produced the highest-rated pieces of the project from scene descriptions that appear nowhere in training. Narratives attached to one composition each risk being learned as composition identifiers, whereas tags shared across compositions force the model to associate words with sound; mixing both, as we did, keeps the shared vocabulary while letting free text reach the encoder.

Why the automatic measures failed. The friction noise of slides is part of the guqin’s sound, which Penttinen et al. (2006) model as a separate excitation component; what made the listener hear “sawing” was not its amount but where it occurred and how it was articulated. A frame-level noise statistic cannot see that, and it correlated with the score in the wrong direction because noisier clips were often livelier ones. The pentatonic fit captured a real property, and generated clips did place more attacks outside the mode than real recordings, but the listener’s own description, that

idiomatic semitones occur inside slides rather than at the pluck, calls for technique-aware analysis of the kind developed for playing-technique detection (Huang et al., 2020; Li et al., 2022). The measure also disagreed with the listener about the effect of longer training, which is the strongest warning against using it to make decisions. We therefore treat both measures as negative results and use the listener’s ratings as the only criterion.

Training longer helped, but loss is a weak signal. Held-out loss decreased by only 1.2% from the unadapted model to the best pass, and the differences between late passes were of the order of 10^{-5} , yet the pass-14 adapter was the best-rated model of the project. Most of the diffusion loss is irreducible noise, so a small and monotone decrease can coincide with a large perceptual change. Loss is nevertheless the right instrument for one question, when to stop, because it is measured on held-out compositions; it would have been tempting, and wrong, to stop at the first noisy uptick (passes 8 and 15) instead of waiting for three passes without a new best.

Long playback is an engineering problem first. The two failures of chained continuation, silent tails and loudness feedback, are properties of how a fixed-length generator ends and of how its output level relates to its context, not of musical modelling, and both disappeared with a few lines of signal processing. The remaining failure, a sudden breakdown after 82 s in one of two chains, is musical and is the real obstacle to hours of playback; it is the natural target for selection between candidate continuations and for preference-based fine-tuning on the collected ratings (Wallace et al., 2023).

Evaluation with one expert. A single guqin-literate listener made fast iteration possible and produced detailed, actionable comments (“the hook repeats the original”, “semitones like a beginner practising”, “sounds like a cowboy guitar”), several of which turned directly into method changes. The cost is reliability: repeated ratings of the same clips differed by 0.8 points on average and a showcase take was rated 1 in a later session, effects as large as the differences between our models. None of our comparisons is significant, and the studies were sequential, so later choices depended on earlier ratings. Multi-listener evaluation is the first requirement for stronger claims.

Data curation was the decisive step. Automatic screening with audio tagging and audio-text models served only as a first pass; the final decision on every recording was made by whole-track listening. Composition-level splits, a check of a 10-hour DVD collection against the CD library (which turned out to be mostly new but full of applause and ensemble playing), and the discovery that openly licensed guqin audio amounts to under an hour all shaped what could be trained. A planned held-out performer was, by mistake, included in the 412-recording training set, which compromised one study; keeping held-out material out of every automated corpus build is worth an explicit check.

Limitations. All ratings come from one listener; the studies are small and were run sequentially as development proceeded. In R2 the openings came from a performer who, contrary to the original plan, had been included in the 412-recording training set. The narratives and tags are condensed readings of traditional notes on each piece and simplify a rich interpretive tradition; 22 of the 108 titles are inferred from the title alone. We did not test for replication of training material (Batlle-Roca et al., 2024), and the pitch and noise measures were validated only against the same listener.

5 Conclusion

A pretrained latent diffusion model, 42.5 h of carefully screened historical recordings, a 21.6 M-parameter adapter and a single attentive listener were enough to produce guqin continuations and scene-driven pieces that the listener rated highly, at more than eight times real time on a consumer GPU, while training a generator from scratch on the same data failed completely. The strongest effects came not from architecture but from data curation, the choice of prior, held-out early stopping and simple engineering of the generation loop. The next steps are multi-listener evaluation, technique-aware selection between candidate takes, preference-based fine-tuning on the collected ratings, and stable long-form generation for continuous playback.

6 Reproducibility

Code for corpus preparation, training, generation, listening pages and analysis, together with every listening rating and validation log and the scripts that produce all numbers and figures in this article, is available at <https://github.com/HuanchenCai/guqin-generation> (tag `arxiv-v1`; results were frozen at tag `freeze-2026-10-05`, whose `FREEZE.json` records the SHA-256 hashes of all checkpoints used). The training recordings come from a personal collection of historical performances that remain under copyright and cannot be redistributed, and for the same reason we do not release audio generated from them or the adapter weights. The base model is used under Stability AI’s community license.

7 Ethics and Consent

The listening studies involved a single expert listener. No personal data were collected.

Acknowledgements

This work was supported by Språkbanken Tal, Stockholm, Sweden. It received no specific grant funding.

Competing Interests

The author has no competing interests to declare.

Author Contributions

HC conceived the project and its goal of an endless guqin “AI radio”, and directed every stage of the exploration. HC screened the library by listening to whole recordings, decided which performers and pieces to keep or exclude (including recordings with noise floors, ensembles, applause or voice), and noticed that a DVD collection might duplicate the CD material. HC required that splits be made by composition rather than by performer, that evaluation openings never repeat a piece or performer, and that validation recordings stay out of training so that overfitting could be measured. HC proposed moving from text-free continuation to mood labels derived from piece titles, and then to captions telling the story behind each title; proposed the move towards a language-model-like generator over latents; observed that idiomatic guqin semitones occur in slides rather than at the

pluck, which shaped the onset-based measure; proposed random crop lengths in addition to random start points; asked for training to continue until validation loss genuinely stopped improving, and for the run to be resumable after power cuts. HC organised the listening studies, identified the silent seams and the loudness drift in chained continuation, and selected the takes used for demonstration.

Use of AI Tools

AI coding assistants (OpenAI Codex and Anthropic Claude) implemented and ran the code for data processing, training, generation, listening pages and analysis under the author’s direction, searched for and summarised background sources on the pieces, and drafted parts of this manuscript. All research decisions are the author’s, who reviewed the results and the text and takes responsibility for the content.

References

- Batlle-Roca, R., Liao, W.-H., Serra, X., Mitsufuji, Y., et al. (2024). Towards assessing data replication in music generation with music similarity metrics on raw audio. *arXiv preprint arXiv:2407.14364*. <https://doi.org/10.48550/arXiv.2407.14364>.
- Chen, G.-F. (2025). Deep-learning-based image recognition of ancient musical score of guqin. In *Fifth International Conference on Image Processing and Intelligent Control*. <https://doi.org/10.1117/12.3074105>.
- Copet, J., Kreuk, F., Gat, I., Remez, T., et al. (2023). Simple and controllable music generation. *arXiv preprint arXiv:2306.05284*. <https://doi.org/10.48550/arXiv.2306.05284>.
- Evans, Z., Carr, C., Taylor, J., Hawley, S. H., and Pons, J. (2024a). Fast timing-conditioned latent audio diffusion. In *International Conference on Machine Learning (ICML)*. <https://doi.org/10.48550/arXiv.2402.04825>, arXiv:2402.04825.
- Evans, Z., Parker, J. D., Carr, C., Zukowski, Z., Taylor, J., and Pons, J. (2024b). Long-form music generation with latent diffusion. *arXiv preprint arXiv:2404.10301*. <https://doi.org/10.48550/arXiv.2404.10301>.
- Evans, Z., Parker, J. D., Carr, C., Zukowski, Z., Taylor, J., and Pons, J. (2024c). Stable Audio Open. *arXiv preprint arXiv:2407.14358*. <https://doi.org/10.48550/arXiv.2407.14358>.
- Evans, Z., Parker, J. D., Rice, M., et al. (2026). Stable Audio 3. *arXiv preprint arXiv:2605.17991*. <https://doi.org/10.48550/arXiv.2605.17991>.
- Han, H., Lostanlen, V., and Lagrange, M. (2025). GuqinSonGest: A multimodal and historically grounded dataset of guqin playing techniques. In *Proceedings of the Sound and Music Computing Conference (SMC)*. <https://doi.org/10.5281/zenodo.15838294>.
- Hu, E. J., Shen, Y., Wallis, P., Allen-Zhu, Z., Li, Y., Wang, S., Wang, L., and Chen, W. (2021). LoRA: Low-rank adaptation of large language models. *arXiv preprint arXiv:2106.09685*. <https://doi.org/10.48550/arXiv.2106.09685>.
- Huang, Y.-F., Liang, J.-I., Wei, I.-C., and Su, L. (2020). Joint analysis of mode and playing technique in guqin performance with machine learning. In *Proceedings of the International Society for Music Information Retrieval Conference (ISMIR)*. <https://doi.org/10.5281/zenodo.4245378>.

- Hui, Y. (2024). A retrospective view of Chinese contributions to digital humanities in computational guqin music research. *Computer Music Journal*, 48(2):45–58. <https://doi.org/10.1162/comj.a.4>.
- Kuremoto, T., Fujino, K., Takahashi, H., Kuremoto, S., Koshiba, M., and Hieda, H. (2024). Restoration of guqin music by deep learning methods. In *Proceedings of the International Conference on Artificial Life and Robotics*, volume 29, pages 320–324. <https://doi.org/10.5954/icarob.2024.os12-1>.
- Li, D., Wu, Y., Li, Q., Zhao, J., Yu, Y., Xia, F., and Li, W. (2022). Playing technique detection by fusing note onset information in guzheng performance. In *Proceedings of the International Society for Music Information Retrieval Conference (ISMIR)*. <https://doi.org/10.48550/arXiv.2209.08774>.
- Li, T., Tian, Y., Li, H., Deng, M., and He, K. (2024). Autoregressive image generation without vector quantization. *arXiv preprint arXiv:2406.11838*. <https://doi.org/10.48550/arXiv.2406.11838>.
- Li, Z., Zhang, F., Liu, Z., and Cheng, J. (2026). Zero-shot jianzi recognition as structured visual information extraction in open compositional notation. In *Proceedings of the 64th Annual Meeting of the Association for Computational Linguistics*, pages 29414–29429. <https://doi.org/10.18653/v1/2026.acl-long.1356>.
- Liu, J., Yang, C., Li, Z., and Jiang, W. (2024a). An acoustic dataset construction method of Chinese traditional musical instrument guqin. In *International Conference on Culture-Oriented Science and Technology*, pages 434–439. <https://doi.org/10.1109/CoST64302.2024.00091>.
- Liu, S.-Y., Wang, C.-Y., Yin, H., Molchanov, P., et al. (2024b). DoRA: Weight-decomposed low-rank adaptation. *arXiv preprint arXiv:2402.09353*. <https://doi.org/10.48550/arXiv.2402.09353>.
- Liu, X., Gong, C., and Liu, Q. (2022). Flow straight and fast: Learning to generate and transfer data with rectified flow. *arXiv preprint arXiv:2209.03003*. <https://doi.org/10.48550/arXiv.2209.03003>.
- lukewys (2019). Guqin-Dataset: Symbolic music dataset for guqin music. GitHub repository, <https://github.com/lukewys/Guqin-Dataset>. Accessed 2026-10-05.
- Lyria Team, Caillon, A., McWilliams, B., Tarakajian, C., et al. (2025). Live music models. *arXiv preprint arXiv:2508.04651*. <https://doi.org/10.48550/arXiv.2508.04651>.
- Muennighoff, N., Rush, A. M., Barak, B., Le Scao, T., et al. (2023). Scaling data-constrained language models. *arXiv preprint arXiv:2305.16264*. <https://doi.org/10.48550/arXiv.2305.16264>.
- Pasini, M., Nistal, J., Lattner, S., and Fazekas, G. (2024). Continuous autoregressive models with noise augmentation avoid error accumulation. *arXiv preprint arXiv:2411.18447*. <https://doi.org/10.48550/arXiv.2411.18447>.
- Peebles, W. and Xie, S. (2022). Scalable diffusion models with transformers. *arXiv preprint arXiv:2212.09748*. <https://doi.org/10.48550/arXiv.2212.09748>.
- Penttinen, H., Pakarinen, J., Välimäki, V., Laurson, M., Li, H., and Leman, M. (2006). Model-based sound synthesis of the guqin. *The Journal of the Acoustical Society of America*, 120:4052–4063. <https://doi.org/10.1121/1.2360422>.
- Shi, K., Liu, K., and Zhang, X. (2024). Guqin jianzi notation transcription based on language model. In *Communications in Computer and Information Science*, pages 66–79. https://doi.org/10.1007/978-981-97-0576-4_5.

- Wallace, B., Dang, M., Rafailov, R., Zhou, L., et al. (2023). Diffusion model alignment using direct preference optimization. *arXiv preprint arXiv:2311.12908*. <https://doi.org/10.48550/arXiv.2311.12908>.
- Wang, C., Huang, Y., Chen, S., Sun, H., Liu, F., and Liu, J. (2025). From guqin jianzipu to staff notation: Design of a pitch generation algorithm based on analysis of string order and hui position. In *International Conference on Data Management and Computer Science*, pages 35–43. <https://doi.org/10.1109/ICDMCS69443.2025.00014>.
- Wang, Z., Chen, Z., Bao, T., et al. (2026). Phrase-level robotic guqin performance: Bimanual motion planning and audio-tactile interaction monitoring. *arXiv preprint arXiv:2609.24133*. <https://doi.org/10.48550/arXiv.2609.24133>.
- Zhang, T., Yan, H., Yang, Y., and Wang, Z. (2026). A haptic robot finger designed for guqin instrument playing. *arXiv preprint arXiv:2608.07002*. <https://doi.org/10.48550/arXiv.2608.07002>.
- Zhang, Y., Chen, G., Yu, S., and Tong, Z. (2025). Analysis of guqin playing techniques based on artificial intelligence. *Journal of Electronic Research and Application*, 9:125–134. <https://doi.org/10.26689/jera.v9i4.11449>.
- Zhang, Y., Liu, S., Tao, L., Yu, C., Shi, Y., and Xu, Y. (2015). ChinAR: Facilitating Chinese guqin learning through interactive projected augmentation. In *Proceedings of the Third International Symposium of Chinese CHI*, pages 23–31. <https://doi.org/10.1145/2739999.2740003>.