


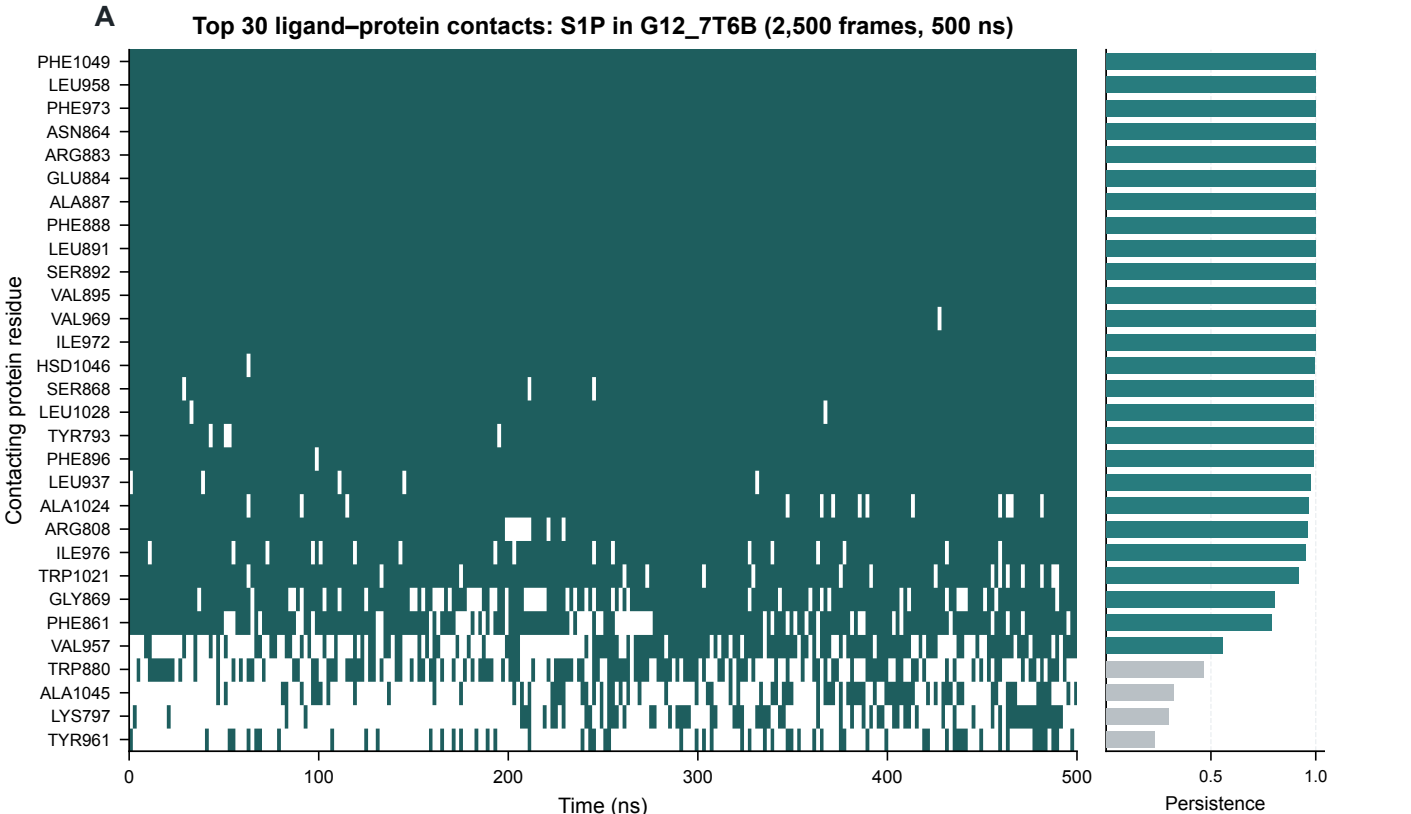

B

Reuse code

```
# G12_7T6B, release replica 1
# Verify the manifest SHA-256 values
$ sha256sum structure.pdb
b8b11cc6f4bac15c777671fd4f818ccda809da4398599db71d6ed9a6c9d666e4
$ sha256sum traj.xtc
7e81f67f2ef127cffc2078d3d685beab375470aa169c38fcfd087d988e98c5f9
import MDAnalysis as mda
u = mda.Universe("structure.pdb", "traj.xtc")
assert u.atoms.n_atoms == 17318
assert len(u.trajectory) == 2500

# Select binding-pocket Cα atoms
# (all 48 residues that contact the S1P ligand)
pocket = u.select_atoms(
    """name CA and (resid
    "793 797 801 808 861 864 865 867 868 869 "
    "870 873 875 880 883 884 885 887 888 891 "
    "892 895 896 933 934 937 957 958 959 961 "
    "968 969 970 972 973 976 1021 1024 1025 1027 "
    "1028 1043 1045 1046 1049 1050 1052 1053)"""
)
from MDAnalysis.analysis import rms
rmsd_analysis = rms.RMSD(
    u, pocket, select=pocket, ref_frame=0
).run()
```

C

Binding-pocket Cα RMSD: G12_7T6B (fit to 48 pocket residues, mean=1.35 Å, P95=1.66 Å)

