What the harness does

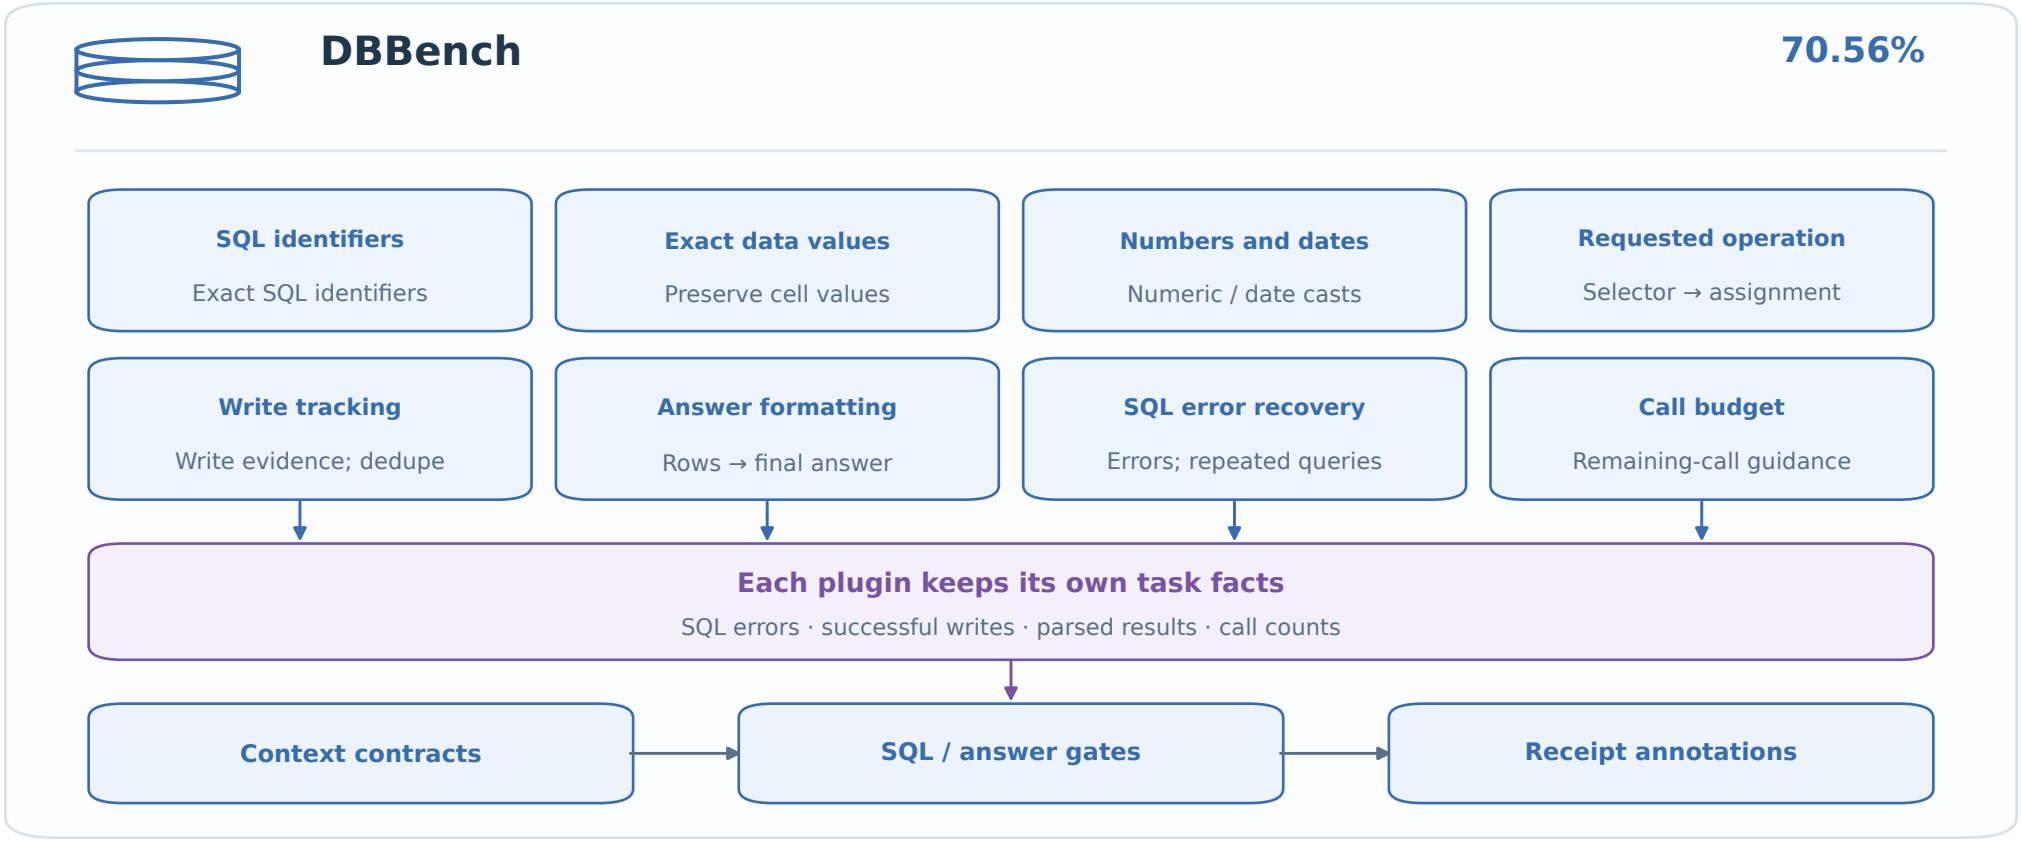

How its parts work

Constrain the query

Context + pre-execute

schema-contract
  Exact table / column names
literal-contract
  Exact stored values
numeric-calendar
  Numeric / chronological casts
intent-contract
  Selector vs assignment

budget-conductor

SQL / write / error counters
Late-call guidance
15-call episode budget

Track execution

write-workflow

Successful writes[]
Duplicate-write checks
Commit gate: write executed

Independent receipt handlers

sql-recovery

Errors + query repeat counts
Repair hints in context
Repeated-failure checks

Shape the answer

result-bridge

SELECT receipt → rowsOf()
Rows → cellsOf() / decode()

Single column → value
Multiple columns → tuple

answers[] → context
→ commit_final_answer

Completion state

hadSql · committed
Gate premature submission
Preserve returned row shape

Enabled checkpoint configuration

```
write-workflow: proof + dedupe; result-bridge: annotate + live + guard
```