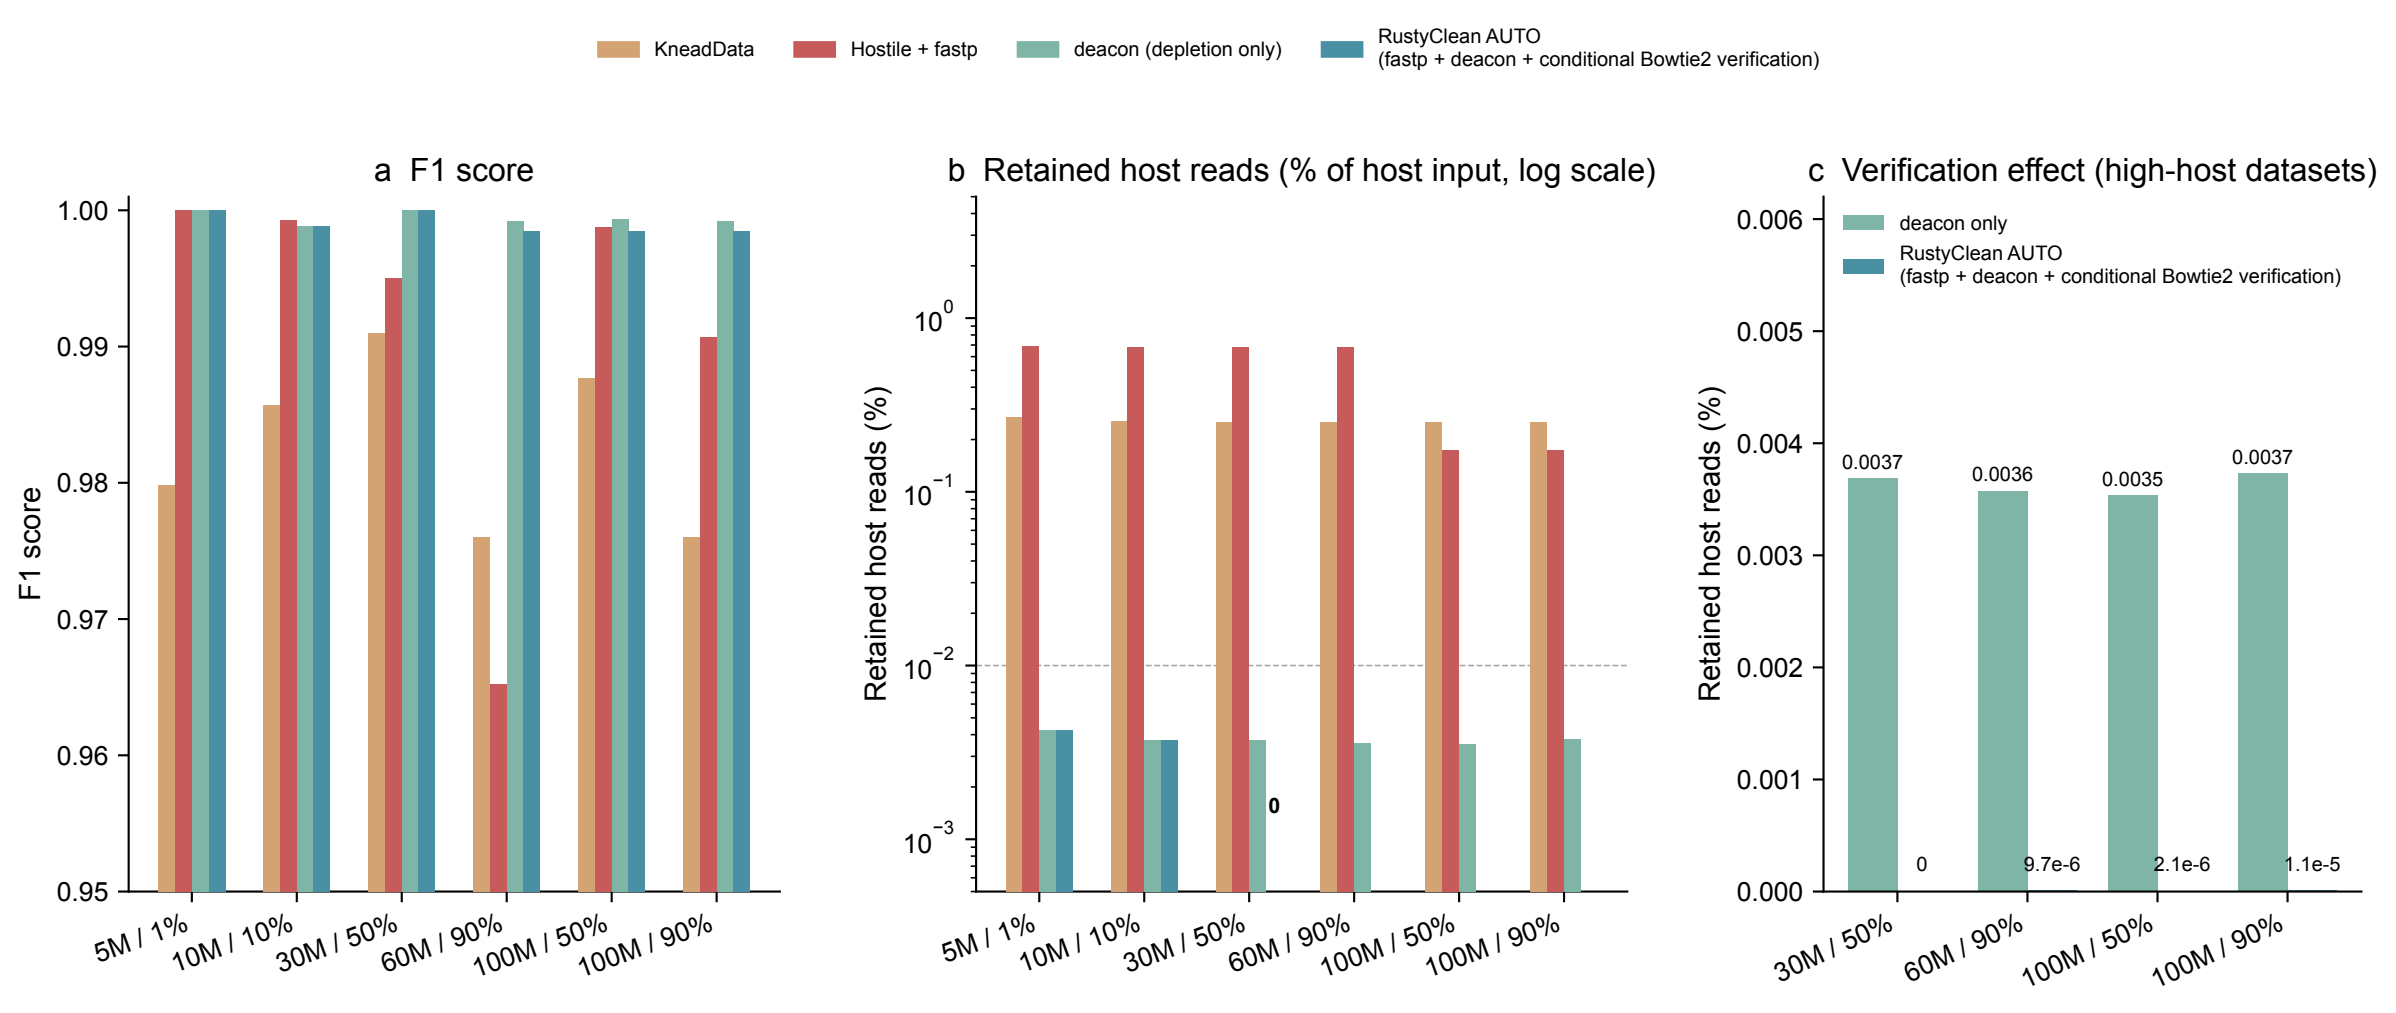
KneadData
Hostile + fastp
deacon (depletion only)
RustyClean AUTO
(fastp + deacon + conditional Bowtie2 verification)
a F1 score
F1 score
1.00
0.99
0.98
0.97
0.96
0.95
5M / 1%
10M / 10%
30M / 50%
60M / 90%
100M / 50%
100M / 90%
b Retained host reads (% of host input, log scale)
Retained host reads (%)
10^{0}
10^{-1}
10^{-2}
10^{-3}
0
c Verification effect (high-host datasets)
deacon only
RustyClean AUTO
(fastp + deacon + conditional Bowtie2 verification)
Retained host reads (%)
0.006
0.005
0.004
0.003
0.002
0.001
0.000
0.0037
0.0036
0.0035
0.0037
0
9.7e-6
2.1e-6
1.1e-5
30M / 50%
60M / 90%
100M / 50%
100M / 90%