

# Programming GUIs using Qt

## 1.1 An introductory example

To get a small feel for how one programs a GUI using `qtbases`, the R package that interfaces R with the Qt libraries, we show how to produce a simple dialog to collect a date from a user.

If the underlying libraries and package are installed, the package is loaded as any other R package:

```
require(qtbases)
```

**Constructors** As with all other toolkits, in Qt, GUI components are created with constructors. For this example, we will set various properties later, rather than at construction time. For our GUI we have four basic widgets: a widget used as a container to hold the others, a label, a single line edit area and a button.

```
w <- Qt$QWidget()
l <- Qt$QLabel()
e <- Qt$QLineEdit()
b <- Qt$QPushButton()
```

The constructors are not found in the global environment, but rather are found in the Qt environment provided through `qtbases`. As such, the `$` lookup operator is used. For this example, we use a `QWidget` as a top-level window, leaving for to discuss the `QMainWindow` object and its task-tailored features.

Widgets in Qt have various properties that set the state of the object. For example, the window object, `w`, has the `windowTitle` property that is adjusted as follows:

```
w$windowTitle <- "An example"
```

Qt objects are essentially environments. In the above, the named component `windowTitle` of the environment holds the value of the `windowTitle` property of the object, so the `$` use is simply that for environments.

Figure 1.1: Screenshot of our sample GUI to collect a date from the user.

More typical, is a method call. Qt overloads the `$` operator for method calls (as does RGtk2). For example, both the button object and label object have a text property. The setter `setText` can be used to assign a value. For example,

```
l$setText("Date:")  
b$setText("Ok")
```

Although, the calling mechanism is more complicated than just the lookup of a function stored as the component `setText` (cf. ), as the object is passed into the body of the function, the usage is similar.

**Layout Managers** Qt uses layout managers to organize widgets. This is similar to Java/Swing and `tcltk`, but not RGtk2. Layout managers will be discussed more thoroughly in , but in this example we will use a grid layout to organize our widgets. The placement of child widgets into the grid is done through the `addWidget` method and requires a specification, by index and span, of the cells the child will occupy.

```
lyt <- Qt$QGridLayout()  
lyt$addWidget(l, row=0, column=0, rowSpan=1, columnSpan=1)  
lyt$addWidget(e, 0, 1, 1, 1)  
lyt$addWidget(b, 1, 1, 1, 1)
```

One can adjust properties of the layout, but we leave that discussion for later.

We need to attach our layout to the widget `w`, which is done through the `setLayout` method:

```
w$setLayout(lyt)
```

To view our GUI (Figure 1.1), we must call its `show` method.

```
w$show()
```

**Callbacks** As with other GUI toolkits, we add interactivity to our GUI by binding callbacks to certain events. To add a command to the clicking or pressing of the button is done by attaching a handler to the “pressed” signal for the button (the “clicked” signal is only for mouse clicks). Widgets have various signals they emit. Additionally, there are window-manager events that may be of interest, but using them requires more work than is used below. The `qconnect` function is used to add a handler for a signal. The function needs, as a minimum, the object, the signal name and the handler. Here we print the value stored in the “Date” field.

```
handler <- function(checked) print(e$text)  
id <- qconnect(b, "pressed", handler)
```

We will discuss callbacks more completely in .

**Refinements** At this point, we have a working dialog built with `qtbase`. There is much room for refinement, which due to Qt's many features are relatively easy to implement. For this example, we want to guide the user to fill out the date in the proper format. We could have used Qt's `QDateEdit` widget to allow point-and-click selection, but instead show two ways to help the user fill in the information with the keyboard

The `QLineEdit` widget has a number of ways to adjust its behavior. For example, an input mask provides a pattern for the user to fill out. For a date, we may want the value to be in the form "year-month-date." This would be specified with "0000-00-00", as seen by consulting the help page for `QLineEdit`. To add an input mask we have:

```
e$setInputMask("0000-00-00")
```

Further, for the line edit widget Qt can implement validation of the entered text. There are a few built-in validators, and for this purpose the regular expression validator could be used, but instead we wish to determine if we have a valid date by seeing if we can coerce the string value to a date via R's `as.Date` function with a format of "%Y-%m-%d". The method `setValidator` can be used to set the validator that is in charge of the validation. However, rather than passing a function, one must pass an instance of a validator class. For our specific needs, we need to create a new class.

**Object-oriented support** The underlying Qt libraries are written in C++. The object oriented nature is preserved by `qtbase`. Not only are the classes and methods implemented in R, the ability to implement new subclasses and methods is also possible. For this task, we need to implement a subclass of the `QValidator` class, and for this subclass implement a `validate` method. More detail on working with classes and methods in `qtbase` is provided in .

The `qsetClass` function is used to set a new class. To derive a subclass, we need just this:

```
qsetClass("dateValidator", Qt$QValidator, function(parent = NULL) {  
  super(parent)  
})
```

The `validate` method is implemented as a virtual class in Qt, in R we implement a method of our sub class. The `qsetMethod` is employed. The signature of the `validate` method is a string containing the input and an index indicating where the cursor is in the text box. The return value of this method indicates a state of "Acceptable", "Invalid", or if neither can be determined "Intermediate." These values are actually integers, and in this case are stored within an enumeration in the `Qt$QValidator` class.

```
qsetMethod("validate", dateValidator, function(input, pos) {
  if(!grepl("[0-9]{4}-[0-9]{1,2}-[0-9]{1,2}$", input))
    return(Qt$QValidator$Intermediate)
  else if(is.na(as.Date(input, format="%Y-%m-%d")))
    return(Qt$QValidator$Invalid)
  else
    return(Qt$QValidator$Acceptable)
})
```

To use this new class, we call its constructor, which has the same name as the class, and then set it as a validator for the line edit widget:

```
validator <- dateValidator()
e$setValidator(validator)
```

### 1.2 Overview

Qt is an open-sourced, cross-platform application and UI framework. Its history begins with Haavard Nord and Eirik Chambe-Eng in 1991, the Trolltech company until 2008, and now Nokia, a major cell-phone producer. While originally not an open-source project, it now has licensing under the LGPL that allows its use in open-source software.

Qt is developed in C++ with extensions. There are several languages with bindings to Qt with R being one through the `qtbases` and `qtpaint` packages. While these packages are quite new as compared to `tcltk` and `RGtk2`, they are included here, as Qt provides arguably the richest GUI environment from within R will likely be the GUI toolkit of choice going forward.

Qt, a commercially supported package, has excellent documentation of its API and has several examples of its use using C++.

### 1.3 The `qtbases` package

The `qtbases` provides the primary interface between R and the underlying Qt libraries, provided the latter are installed. The Qt framework is available as a binary install from <http://qt.nokia.com/>.

The package exports very few items. The main one is an environment, `Qt`, that contains the bulk of the functionality. The components of this environment preserve the class structure from Qt. For example, the `QWidget` class being represented through the component `Qt$QWidget`.

These components have class

```
class(Qt$QWidget)

[1] "RQtSmokeClass" "RQtClass"      "function"
```

These inherit from functions, as they act as constructors for instances of the class. For example

```
w <- Qt$QWidget()
```

The `w` object has a class structure that reflects the class inheritance structure of Qt:

```
class(w)
```

```
[1] "QWidget"          "QObject"          "QPaintDevice"
[4] "UserDefinedDatabase" "environment"      "RQtObject"
```

Here, the `w` object is an environment and the properties and methods for this instance of the Qt class that are available from within R comprise its components. For `w` the first few listed using `ls`:

```
ls(w)
```

```
[1] "createWinId" "x"          "setFixedSize" "userData"
"lower"
[6] "mapTo"
```

Properties and methods are accessed from the environment in the usual manners available. The most convenient extractor is the `$` operator, but `[[` and `get` will also work. The properties may be accessed like a component of an environment. For example, a `QWidget` has a `windowTitle` property which is used when the widget draws itself with a window. The following shows how it can be accessed and set.

```
w$windowTitle
```

```
NULL
```

```
w$windowTitle <- "a new title"
w$windowTitle
```

```
[1] "a new title"
```

However, most properties in Qt are accessed through getter and setter methods. In this case, we have the setter `setWindowTitle` available

```
w$setWindowTitle("an even newer title")
```

Setter methods are typically named with the word "set" followed by the property name written in lower camel case, the convention Qt uses for its properties and method. (Class names are in upper camel case.)

The environment structure of the object masks the fact that the methods may be defined in a parent class of the object. For example, a button widget is provided by the `QPushButton` constructor, as in

```
b <- Qt$QPushButton()
```

This too has a `windowTitle` property, but this is inherited from the fact that the `QPushButton` subclasses the `QWidget` class, as may be seen from:

```
head(class(b), n=3)
```

```
[1] "QPushButton"      "QAbstractButton" "QWidget"
```

The reason this distinction is important to know, is that the documentation for the method will be found with the class where the method is defined, not in the subclass. As there is no easy way even to tell the signature of these methods, being able to consult the documentation is crucial.

### Constructors

As mentioned, the class name is the same as the constructor, but constructors may have different signatures. For example, a simple push button can be produced in several different ways:

```
b <- Qt::QPushButton()
```

Qt allows one to specify a parent object at construction time, although generally this happens when the widget is added to a layout. The child gets added to the list of children of the parent thereby creating an object heirarchy. This allows such things as the communication between components during resizing of layouts or the automatic deletion of ancestors when a parent widget is destroyed. This happens by assigning NULL as a parent.

```
w <- Qt::QWidget()
b <- Qt::QPushButton(parent=w)
```

In addition, there are convenience constructors. To set the text property for a button, one can pass the value to the `text` argument:

```
b <- Qt::QPushButton(text="Button text")
```

We used a named argument, but the matching is done by position and type of object.

Buttons may also have icons, for example

```
i <- Qt::QIcon(system.file("images/ok.gif", package="gWidgets"))
b <- Qt::QPushButton(icon=i, text="Ok")
```

In Qt, the class name prefaced with a tilde is the destructor for a widget, but in qtbase it suffices to assign NULL as the parent through `setParent`

```
b$setParent(NULL)
```

### Common methods for QWidgets and QObjects

The widgets we discuss in the sequel inherit many properties and methods from the base `QObject` and `QWidget` classes. The `QObject` class is the base class and forms the basis for the object heirarchy and the event processing

system. The `QWidget` class is the base class for objects with a user interface. Defined in this class are several methods inherited by the widgets we discuss.

The function `qmethods` will show the methods defined for a class. It returns a data frame with variables indicating the name, return value, signature, and whether the method is protected and static. For example, for a simple button we have many methods.

```
out <- qmethods(Qt$QPushButton)
dim(out)                                # many methods
```

```
[1] 435    5
```

**Showing or hiding a widget** Widgets must have their `show` method called in order to have them drawn to the screen. This call happens through the `print` method for an object inheriting from `QWidget`, but more typically is called by Qt recursively showing the children when a top-level window is drawn. The method `raise` will raise the window to the top of the stack of windows, in case it is covered. The method `hide` will hide the widget.

A widget can also be hidden by calling its `setVisible` method with a value of `FALSE` and reshowed using a value of `TRUE`. Similarly, the method `setEnabled` can be used to toggle whether a widget is sensitive to user input, including mouse events.

Only one widget can have the keyboard focus. This is changed by the user through tab-navigation or mouse clicks (unless customized, see `focusPolicy`), but can be set programatically through the `setFocus` method, and tested through the `hasFocus` method.

Qt has a number of means to notify the user about a widget when the mouse hovers over it. The `setTooltip` method is used to specify a tooltip as a string. The message can be made to appear in the status bar of a top-level window through the method `setStatusTip`.

**The size of a widget** A widget may be drawn with its own window, or embedded in a more complicated GUI. The size of the widget can be adjusted through various methods.

First, we can get the size of the widget through the methods `frameGeometry` and `frameSize`. The `frameGeometry` method returns a `QRect` instance, Qt's rectangle class. Rectangles are parameterized by a point and two dimensions (`x`, `y`, `width` and `height`). In this case, the point is the upper left coordinate and dimensions are in pixels. The convenience function `qrect` is provided to construct `QRect` instances. The `frameSize` method returns a `QSize` object with properties `width` and `height`. The `qsize` function is a convenience constructor for objects of this class.

The widget's fixed size can be adjusted by modifying the rectangle and then resetting the geometry with `setGeometry`, or directly through the same method when integer values are given for the arguments.

```
«ChangeGeometry, results=hid>e>= w <- QtQWidget()rect <- wframeGeometry
rectwidth()rectsetWidth(2 * rectwidth())wsetGeometry(rect)
```

Although the above sets the size, it does not fix it. If that is desired, the methods `setFixedSize` or `setFixedWidth` are available.

When a widget is resized, one can constrain how it changes by specifying a minimum size or maximum size. The properties `minimumSize`, `minimumWidth`, `minimumHeight`, `maximumSize`, `maximumWidth` and `maximumHeight`, and their corresponding setters, are the germane ones. One can also adjust the `sizePolicy` property to fine-tune how widgets expand. For example, buttons will only grow in the  $x$  direction – not the  $y$  direction due to their default size policy.

### Properties and enumerations

As mentioned, widget properties are set via setters. For example a button may be drawn “flat” to remove the typical beveling indicating it is a button. The method `setFlat` accepts a logical indicating if the button is to be “flat.”

Often there can be more than two states for a property, in which case values other than logical ones must be used. For example, the label widget (among others) has a property for how its text is aligned. For alignment there are options left, right, center, top, bottom, etc. In Qt these are represented by integer values whose value can be gleaned from the appropriate manual page. However, `qtbase` provides these values as named enumerations in the `Qt$Qt` object. For example, right alignment is specified with

```
Qt$Qt$AlignRight
```

```
AlignRight
  2
attr(,"class")
[1] "QtEnum"
```

These values are used as follows, the last case showing how the `|` operator is used to combine alignments.

```
l <- Qt$QLabel("Our text")
l$setAlignment(Qt$Qt$AlignRight)
l$setAlignment(Qt$Qt$AlignRight | Qt$Qt$AlignVCenter)
```

A full list of the enumerated values can be teased out of the `Qt$Qt` object via

```
ls(attr(Qt$Qt,"env"))

[1] "AA_AttributeCount"                "AA_DontCreateNativeWidgetSiblings"
[3] "AA_DontShowIconsInMenus"          "AA_DontUseNativeMenuBar"
[5] "..."
```



## Keyboard shortcuts

### Fonts

Fonts in Qt are handled through the `QFont` class. In addition to the basic constructor, one constructor allows the programmer to specify a family, such as `helvetica`; pointsize, an integer; weight, an enumerated value such as `Qt::QFont::Light` (or `Normal`, `DemiBold`, `Bold`, or `Black`); and whether the italic version should be used, as a logical.

For example, a typical font specification may be given as follows:

```
f <- Qt::QFont(family="helvetica", ps=12,
               weight=Qt::QFont::Bold,
               italics=TRUE)
```

For widgets, the `setFont` method can be used to adjust the font. For example, to change the font for a label we have

```
l <- Qt::QLabel("Text for the label")
l$setFont(f)
```

The `QFont` class has several methods to query the font and to adjust properties. For example, there are the methods `setFamily`, `setUnderline`, `setStrikeout` and `setBold` among others.

### Styles

Qt uses styles to provide a means to customize the look and feel of an application for the underlying operating system. Each style implements a palette of colors to indicate the states “active” (has focus), “inactive” (does not have focus), and “disabled” (not sensitive to user input). Many widgets do not have a visible distinction between active or inactive.

The role an object plays determines the type of coloring it should receive. A palette has an enumeration of `ColorRoles`. From the man page, these include, among others, the following:

```
qpalette::roles <- c(
  Window=10L,           # a general background color
  WindowText=0,         # a general foreground color
  Base=9L,              # background color for text entry widgets
  Text=6L,              # a foreground text color with 'Base'
  BrightText=7L,        # Color to contrast to "Base"
  Highlight=12L,        # indicate selected item
  HighlightedText=13L   # text color to contrast with Highlight
)
```

These roles are used for setting the foreground or background role to give a widget a different look, as illustrated in Example 1.2.

### Style Sheets

Cascading style sheets (CSS) are used by web designers to decouple the layout and look and feel of a web page from the content of the page. Qt implements the mechanism in the `QWidget` class to customize a widget through the CSS syntax. The implemented syntax is described in the overview on stylesheets provided with Qt documentation and is not rewritten here, as it is quite readable.

To implement a change through a style sheet involves the `setStyleSheet` method. For example, to change the background and text color for a button we could have

```
b <- Qt$QPushButton("Style sheet example")
b$show()
b$setStyleSheet("QPushButton {color: red; background: white;}")
```

One can also set a background image:

```
ssheet <- sprintf("* {background-image: url(%s)}", "logo.png")
b$setStyleSheet(ssheet)
```

### 1.4 Signals

Qt in C++ uses an architecture of signals and slots to have components communicate with each other. A component emits a signal when some event happens, such as a user clicking on a button. Qt allows one to register a slot in another component (or the same) that will be passed information when the signal is emitted. The two components are decoupled as the emitter does not need to know about the receiver except through the coupling. In R, this isn't quite the case. A function takes the role of a slot (similar then to how `RGtk2` works via callbacks) and is called when the signal is emitted. The function `qconnect` does the work. For example

```
b <- Qt$QPushButton("click me")
qconnect(b, "clicked", function(checked) print("ouch"))
b$show()
```

The signal names are defined within a class or inherited through subclasses. Sometimes the callback has arguments.<sup>1</sup> The `clicked` signal used above inherits from `QAbstractButton`, which also is a base class for check boxes. As such, this signal passes in information if the button is checked.

The optional argument `user.data` can be used to specify data to parameterize the callback. This data is passed in through the last argument.

The `qconnect` function has no return value. In `RGtk2` the return value is used to remove a callback. For Qt, the `disconnect` method can be used to

---

<sup>1</sup>One advantage of the signal-slot architecture is the type-checking of arguments.

remove connections with some degree of granularity, but this method is not implemented in `qtbases`. Rather, one can block all signals from being emitted with the `blockSignals` method, which takes a logical value to toggle whether the signals should be blocked.

In addition to signals, Qt widgets can also have event handlers for various events. For example, the button may have event handlers for things such as `mouseMoveEvent`. In C++ one uses virtual function (functions defined for instances), but in R these are implemented as methods of sub-classes in R. That is, you define a subclass, and then implement the desired methods, such as `mouseMoveEvent`. This will be illustrated in Example 1.2.

## 1.5 Defining Classes and Methods

The `qtbases` package allows the R user the ability to define classes and sub-classes to extend the features of Qt, as deemed necessary. Classes are related to the constructor that produces an instance of the class. In R classes are implemented as functions along with static methods in an environment. This is done with a bit of R voodoo and carried out when the base constructor is defined.

The `qsetClass` creates a new subclass and defines the constructor. The signature includes the arguments `x` to specify the name of the new class; `parent` to specify the class the new class will be a subclass of (for example, `Qt$QWidget` – the function, not the call, so no parentheses); `constructor` to specify the function used for construction; and a `where` argument to override where the class is defined. Of these, the constructor is the most important. In the introductory example we saw this minimal use of `qsetClass`.

```
qsetClass("dateValidator", Qt$QValidator, function(parent = NULL) {  
  super(parent)  
})
```

Here we see `dateValidator` is the new class name, a sub-class of the `QValidator` class. The constructor has a single call to `super` to inherit the parent's methods.

Within the body of the constructor, the variable `this` is a reference to the instance of the class and the inherited method names are also attached, so need not be referenced through the `$` notation.

To define a method for a class the `qsetMethod` function is used. The signature includes `name`, for the new name; `class`, for the class being extended; and `FUN` to define the method. The dispatch happens on the class and method name, not on the signature of the method. In addition, there is an argument `access` to specify if the method is "public" (the default), "protected", or "private".

Within the method, the special `super` function can be used to call the next method, if the sub class overrides a method. An example is in Example 1.2.

The basic call looks like `super(meth_name, arg1, arg2, ...)`.

**Example 1.1: A “error label”**

A common practice when validation is used for text entry is to have a “buddy label.” That is an accompanying label to set an error message. As Qt uses “buddy” for something else, we call this an “error label” below. We show how to implement such a widget in `qtbase` where we subclass the single-line text edit widget constructed by `QLineEdit`. We begin by defining our subclass and constructor

```
qsetClass("ErrorLabel", Qt$QLineEdit,
         function(text, parent=NULL, message="") {
  super(parent)

  this$widget <- Qt$QWidget()           # for attaching
  this$error <- Qt$QLabel()             # set height=0
  this$error$setStyleSheet("* {color: red}") # set color

  lyt <- Qt$QGridLayout()               # layout
  lyt$setVerticalSpacing(0)
  lyt$addWidget(this, 0, 0, 1, 1)
  lyt$addWidget(error, 1, 0, 1, 1)
  this$widget$setLayout(lyt)

  if(nchar(message) > 0)
    setMessage(message)
  else
    setErrorHeight(FALSE)
  if(!missing(text)) setText(text)
})
```

In addition to the call to `super`, we define a `QWidget` instance to contain the line edit widget and its label. These are placed within a grid layout. The use of `this` refers to the object we are creating. The new method `setErrorHeight` is used to flatten the height of the label when it is not needed and is defined below. The final line sets the initial text in the line edit widget. The R environment where `setText` is defined is extended by the environment of this constructor, so no prefix is needed in the call.

The widget component is needed to actually show the widget. We create an accessor method for this

```
qsetMethod("widget", ErrorLabel, function() widget)
```

We extend the API of the line edit widget for this sub class to modify the message. We define three methods, one to get the message, one to set it and a convenience function to clear the message.

```
qsetMethod("message", ErrorLabel, function() error$text)
```

```
qsetMethod("setMessage", ErrorLabel, function(msg="") {
  if(nchar(msg) > 0)
    error$setText(msg)
  setErrorHeight(nchar(msg) > 0)
})
qsetMethod("clear", ErrorLabel, function()  setMessage())
```

Finally, we define the method to set the height of the label, so that when there is no message it has no height. We use a combination of setting both the minimum and maximum height.

```
qsetMethod("setErrorHeight", ErrorLabel, function(do.height=FALSE)
{
  if(do.height) {
    m <- 18; M <- 100
  } else {
    m <- 0; M <- 0
  }
  error$setMinimumHeight(m)
  error$setMaximumHeight(m)
})
```

To use this widget, we have the extra call to `widget()` to retrieve the widget to add to a GUI. In the following, we just show the widget.

```
e <- ErrorLabel()
w <- e$widget()           # get widget to show
w$show()                  # to view widget
e$setMessage("A label")   # opens message
e$clear()                  # clear message, shrink space
```

## 1.6 Drag and drop

Qt has native support for basic drag and drop activities for some of its widgets, such as text editing widgets, but for more complicated situations such support must be programmed in. The toolkit provides a clear interface to allow this.

A drag and drop event consists of several stages: the user selects the object that initiates the drag event, the user then drags the object to a target, and finally a drop event occurs. In addition, several decisions must be made, e.g., will the object “move” or simply be copied. This is determined by XXX. Or, what kind of object will be transferred (an image? text?, ...) etc. The type is specified using a standard MIME specification.

**Initiating a drag and drop source** When a drag and drop sequence is initiated, the widget receiving the mouse press event needs to set up a `QDrag` instance that will transfer the necessary information to the receiving widget.

In addition, the programmer specifies the type of data to be passed, as an instance of the `QMimeData` class. Finally, the user must call the `exec` method with instructions indicating what happens on the drop event (the supported actions) and possibly what happens if no modifier keys are specified. These are given using the enumerations `CopyAction`, `MoveAction`, or `LinkAction`. This is all specified in a new method for `mousePressEvent`, so must be done in a subclass of the widget you wish to use.

**Creating a drop target** The application must also set up drop sources. Each source has its method `setAcceptDrops` called with a `TRUE` value. In addition, one must implement several methods so again, a subclass of the desired widget is needed. Typically one implements at a minimum a `dropEvent` method. This method has an `QDropEvent` instance passed in which has the method `mimeData` to get the data from the `QDrag` instance. This data has several methods for querying the type of data, as illustrated in the example. If everything is fine, one calls the event's `acceptProposedAction` method to set the drop action. One can also specify other drop actions.

Additionally, one can implement methods for `dragMoveEvent` and `dragLeaveEvent`. In the example, the move and leave event adjust properties of the widget to indicate it is a drop target.

### Example 1.2: Drag and drop

We will use sub classes of the label class to illustrate how one implements basic drag-and-drop functionality. Our treatment follows the Qt tutorial on the subject. We begin by setting up a label to be a drag target.

```
qsetClass("DragLabel", Qt$QLabel, function(text="", ...) {  
  parent(...)  
  setText(text)  
})
```

The main method to implement for the sub class is `mousePressEvent`. The argument `e` contains event information for the mouse, we don't need it here. We have the minimal structure here: implement mime data to pass through, set up a `QDrag` instance for the data, then call the `exec` method to initiate.

```
qsetMethod("mousePressEvent", DragLabel, function(e) {  
  md <- Qt$QMimeData()  
  md$setText(text)  
  
  drag <- Qt$QDrag(this)  
  drag$setMimeData(md)  
  
  drag$exec(Qt$Qt$CopyAction | Qt$Qt$MoveAction, Qt$Qt$CopyAction)  
})
```

Implementing a label as a drop target is a bit more work, as we customize its appearance. Our basic constructor follows:

```
qsetClass("DropLabel", Qt$QLabel, function(text="", ...) {
  parent(...)

  setText(text)
  setAcceptDrops(TRUE)

  this$bgrole <- backgroundRole()
  setMinimumSize(200, 200)
  setAutoFillBackground(TRUE)
  clear()
})
```

We wish to override the call to `setText` above, as we want to store the original text in a property of the widget. Note the use of `super` below to call the next method.

```
qsetMethod("setText", DropLabel, function(str) {
  this$orig_text <- str
  super("setText", str)          # next method
})
```

The `clear` method is used to restore the label to an initial state. We have saved the background role and original text as properties.

```
qsetMethod("clear", DropLabel, function() {
  setText(this$orig_text)
  setBackgroundRole(this$bgrole)
})
```

The enter event notifies the user that a drop can occur on this target by changing the text and the background role.

```
qsetMethod("dragEnterEvent", DropLabel, function(e) {
  super("setText", "<Drop Text Here>")
  setBackgroundRole(qpaletteRoles['Highlight'])

  e$acceptProposedAction()
})
```

The move and leave events are straightforward. We call `clear` when the drag leaves the target to restore the widget.

```
qsetMethod("dragMoveEvent", DropLabel, function(e) {
  e$acceptProposedAction()
})
qsetMethod("dragLeaveEvent", DropLabel, function(e) {
  clear()
  e$acceptProposedAction()
})
```

Finally, the important drop event. The following shows how to implement this in more generality than is needed for this example, as we only have text in our mime data. The `setPixmap` and `setTextFormat` methods for labels will be discussed in Section.

```
qsetMethod("dropEvent", DropLabel, function(e) {
  md <- e$mimeType()

  if(md$hasImage()) {
    setPixmap(md$imageData())
  } else if(md$hasHtml()) {
    setText(md$html)
    setTextFormat(Qt$Qt$RichText)
  } else if(md$hasText()) {
    setText(md$text())
    setTextFormat(Qt$Qt$PlainText)
  } else {
    setText("No match")          # replace ...
  }

  setBackgroundRole(this$bgrole)
  e$acceptProposedAction()
})
```



## Layout managers

Qt provides a set of classes to facilitate the layout of child widgets of a component. These layout managers, derived from the `QLayout` class, are tasked with positioning of the child widgets, allocation of size to the child widgets, updating size when the parent is resized or when child widgets are hidden or removed. Unlike GTK+, where this management is tied to a container object, Qt decouples the layout from the widget.

In this chapter we discuss how to program GUI layouts. An alternative would be to use the Qt Designer application to specify the layout. We begin with an example that shows many of the different types of layouts.

### Example 2.1: Using layout managers to mock up an interface

This example illustrates how to layout a somewhat complicated GUI by hand using a combination of different layout managers provided by Qt. Figure 2.1 shows a screenshot of the finished layout.

Qt provides the standard layouts for box layouts and grid layouts, in addition there are notebook containers and special layouts for forms, as seen in the following. Our GUI is layed out from the outside in. The first layout used is a grid layout which will hold three main areas: one for table (we use a label for now), one for a notebook, a layout to hold some buttons.

A `QWidget` instance can hold one layout specified by the `setLayout` method. We use widget for a top-level window and specify a grid layout.

```
w <- Qt$QWidget()
w$setWindowTitle("Layout example")
gridLayout <- Qt$QGridLayout()
w$setLayout(gridLayout)
```

Here we define the two main widgets and the layout for our buttons.

```
tableWidget <- Qt$QLabel("Table widget") # for now
nbWidget <- Qt$QTabWidget()
buttonLayout <- Qt$QHBoxLayout()
```

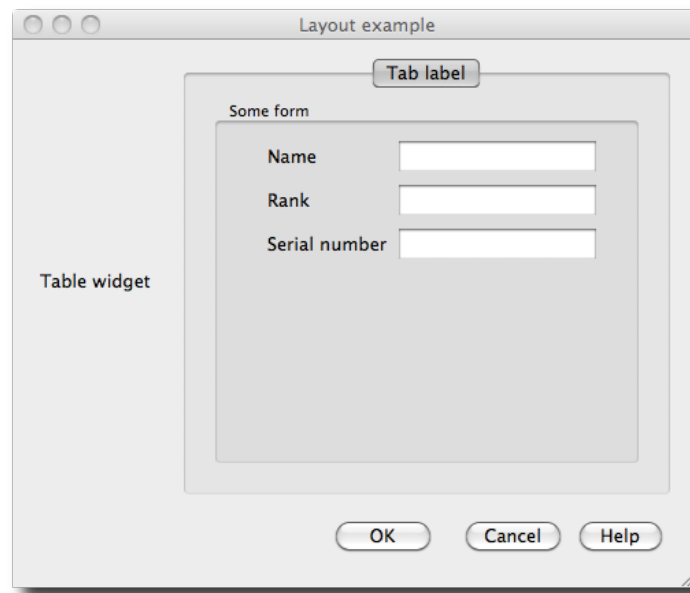


Figure 2.1: A mock GUI illustrating various layout managers provided by Qt.

Grid layouts have two main methods, `addWidget` which is inherited from a base `QLayout` class, and `addLayout`. In addition, we specify what part of the grid the child widget or layout will occupy through a 0-based row and column and spanning directions for both row and columns.

```
gridLayout$addWidget(tableWidget, row=0, column=0,  
                      rowspan=5, colspan=1)  
gridLayout$addWidget(nbWidget, 0, 1, 5, 4)  
gridLayout$addLayout(buttonLayout, 5, 0, 1, 5)
```

Buttons are added to our box layout through the `addWidget` method. In this case, we want to push the buttons to the right side of the GUI, so we first add a stretch. Stretches are specified by integers. Unallocated space is given first to widgets that have a non-zero stretch factor. We also set spacing of 12 pixels between the "OK" and "Cancel" buttons.

```
b <- sapply(c("OK", "Cancel", "Help"), function(i) Qt$QPushButton(i))  
buttonLayout$addStretch(1L)  
buttonLayout$addWidget(b$OK)  
buttonLayout$addSpacing(12L)  
buttonLayout$addWidget(b$Cancel)  
buttonLayout$addWidget(b$Help)
```

For our notebook widget we add pages through the `addTab` method. We pass in the child widget and a label below. In addition, we set a tooltip for the tab label to give more feedback to the user.

```
nbPage <- Qt$QWidget()
nbWidget$addTab(nbPage, "Tab label")
nbWidget$setTabToolTip(0, "A notebook page with a form")
```

We wish to layout a form inside of the notebook tab, but first create a framed widget using a `QGroupBox` widget. This widget allows us to easily specify a title. We add this to the page using a box layout.

```
f <- Qt$QGroupBox()
f$setTitle("Some form")
lyt <- Qt$QHBoxLayout()
nbPage$setLayout(lyt)
lyt$addWidget(f)
```

The form layout allows us to layout standardized forms where each row contains a label and a widget. This could be done with a grid layout, but using the form layout makes it easier for Qt to style the page as appropriate for the underlying operating system. For illustration purposes, we set the horizontal alignment of the widget and the left align the label.

```
formLayout <- Qt$QFormLayout()
f$setLayout(formLayout)
## can override defaults:
formLayout$setFormAlignment(Qt$Qt$AlignHCenter)
formLayout$setLabelAlignment(Qt$Qt$AlignLeft)
```

Our form template just uses 3 line edit widgets. The `addRow` method makes it easy to specify the label and the widget.

```
l <- sapply(c("name", "rank", "snumber"), function(i) Qt$QLineEdit())
formLayout$addRow("Name", l$name)
formLayout$addRow("Rank", l$rank)
formLayout$addRow("Serial number", l$snumber)
```

Finally, we set the minimum size for our GUI and call `show` on the top-level widget.

```
w$setMinimumSize(width=500, height=400)
w$show()
```

## 2.1 Box layouts

Box layouts arrange child widgets by packing in values horizontally (from left to right although right to left is possible) or vertical. The `QHBoxLayout` constructor provides a horizontal layout whereas `QVBoxLayout` provides a

vertical one. Both of these classes subclass the `QBoxLayout` class where most of the functionality is documented. The `direction` property specifies how the layout is done. By default, this is left to right or top to bottom, but can be set (e.g., using `Qt::LeftToRight`).

Child widgets are added to a box container through the `addWidget` method. The basic call specifies just the child widget, but one can specify an integer value for `stretch` and an alignment enumeration (e.g. `Qt::AlignLeft` | `Qt::AlignTop`). When more space is available to the widgets than they request, then extra space is allocated based on the value of each widget's `stretch` value (the default is 0).

In addition to adding child widgets, one can nest child layouts through `addLayout`.

The child widgets are indexed (0-based). A count of child widgets is returned by `count`, and individual widget is retrieved by calling the `widget` method on the return value of the layout's `itemAt` method. The `insertWidget` can be used to insert a widget, with arguments similar to `addWidget`. Its initial argument is an integer specifying the index. All child widgets with this index or higher have their index increased by 1.

**Removing a child** Qt provides the methods `removeItem` and `removeWidget` to remove an widget from a layout, but in `qtbases` it is best to avoid these methods. Rather, one can remove a child simply by setting its parent to `NULL` using `setParent`.

Alternatively, the `QStackedWidget` can be used. This widget is designed to hold a number of child widget with only one visible at a time. For this widget children are added through the `addWidget` method and can be removed with `removeWidget`. The latter needs a widget reference. The currently displayed widget can be found from `currentWidget` (which returns `NULL` if there are no child widgets).

**Spacing** The space between two children is controlled through the `setSpacing` method. This sets the common width in pixels, which can be adjusted individually through the `addSpacing` method. The margin area around all the children can be adjusted with the `setContentsMargins` method, although this is often specified through the style.

**Springs and Struts** A stretchable blank widget can be added through the `addStretch` method, where an integer is specified to indicate the stretch factor. If no other widgets have a stretch specified then this widget will take all the non-requested space. A strut (`addStrut`) can be specified to restrict to a minimum height.

```
w <- Qt::QWidget()
w$setWindowTitle("Box container example")
```

```
NULL
```

```
g <- Qt$QHBoxLayout()  
w$setLayout(g)
```

```
NULL
```

```
g$addWidget(Qt$QLabel("left"))
```

```
NULL
```

```
g$addStretch(1L)
```

```
NULL
```

```
g$addWidget(Qt$QLabel("middle"))
```

```
NULL
```

```
g$addSpacing(12L)
```

```
NULL
```

```
g$addWidget(Qt$QPushButton("right"))
```

```
NULL
```

```
g$count()
```

```
[1] 5
```

## Framed Layouts

A frame with a title is a common decoration to a container often utilized to group together widgets that are naturally related. In Qt this layout is implemented through the `QGroupBox` widget. The method `setTitle` can be used to set the title, or it can be passed to the constructor. If the standard position of the title determined from the style is not to the liking, it can be adjusted through the `setAlignment` method. This method takes an enumerated value from `Qt$Qt$AlignLeft`, `Qt$Qt$AlignHCenter` or `Qt$Qt$AlignRight`. The property `flat` can be set to `TRUE` to minimize the allocated space.

Group boxes have a `checkable` property that if enabled the widget will be drawn with a checkbox to control whether the children of the group box are sensitive to user input.

## 2.2 Grid Layouts

The `QGridLayout` class provides a grid layout for aligning its child widgets into rows and columns.

The `addWidget` method is used to add a child widget to the layout and the `addLayout` method adds a nested layout. They have similar arguments. The widget (or layout) is the first argument followed by either a row and column index, a row and column index with an alignment enumeration, a row and column index and a row span and column span amount (defaulting to 1), or in addition an alignment enumeration.

The method `itemAtPosition` returns the `QLayoutItem` instance corresponding to the specified row and column. This has a `widget` method to find the corresponding widget attached at that row-column cell. The methods `rowCount` and `columnCount` can be used to find the size of the grid.

Removing a widget is similar for a box layout using `removeItem` or `removeWidget`.

Rows and columns are dual concepts and are so implemented. Consequently, both have similar methods differing only by the use of `column` or `row`/. We discuss columns. A column minimum width can be set through `setColumnMinimumWidth`. If more space is available to a column than requested, then the extra space is apportioned according to the stretch factors. This can be set for a column through the `setColumnStretch` method. Taking an integer value 0 or larger.

The spacing between widgets can be set in both directions with `setSpacing`, or fine-tuned with `setHorizontalSpacing` or `setVerticalSpacing`. The style may set these too wide for some tastes.

### Example 2.2: Using the grid layout and a stacked widget to display a calendar

This example shows how to create a simple calendar using a grid layout and the stacked widget. For a real calendar widget the `QCalendarWidget` is a better alternative. We use the `chron` package for its `day.of.week` function. This returns a 0-based index for the day week, starting with Sunday. To this we add functions `week.of.month`, `daysInMonth` and `validDate`.

The monthly calendar will use a grid layout with the two helper functions indicating where to put the cell for the day. Since no cell spans rows or columns we use the simple form of the `addWidget` method, although we do adjust the alignment a bit. The following function creates a widget to produce a monthly calendar. It does three things: create a widget with a grid layout; put in day headers; and finally add in the days one-by-one. The day headers use HTML markup to distinguish them from the days.

```
makeMonth <- function(year, month) {  
  w <- Qt$QWidget()  
  lyt <- Qt$QGridLayout()  
  w$setLayout(lyt)
```

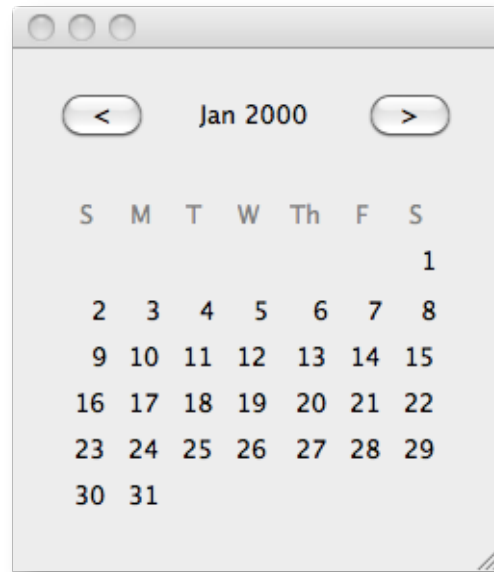


Figure 2.2: A monthly calendar illustrating various nested layouts.

```
## add headers
days <- c("S","M","T","W","Th","F","S")
days <- paste("<font color='gray'>", days, "</font>")
sapply(1:7, function(i) {
  l <- Qt$QLabel(days[i])
  lyt$addWidget(l, 0, i-1, Qt$Qt$AlignHCenter)
})
## add days
sapply(1:daysInMonth(year, month), function(day) {
  lab <- Qt$QLabel(day)
  lyt$addWidget(lab, row=1 + week.of.month(year, month, day),
                column=day.of.week(month, day, year),
                alignment=Qt$Qt$AlignRight)
})
return(w)
}
```

We use a stacked widget to incorporate the monthly calendar into a simple widget that uses arrows to step through the months. We begin with an initial date of January 2000.

```
year <- 2000; month <- 1
```

## 2. LAYOUT MANAGERS

---

Our basic layout will use a vertical box layout with a nested layout for the step-through controls and another holding the calendar widget.

```
w <- Qt$QWidget()
lyt <- Qt$QVBoxLayout()
w$setLayout(lyt)
```

NULL

Our step through controls are added through a horizontal box layout. We could easily use a grid layout here, but this illustrates how to use a stretch factor and alignment to keep the arrows on the edge and the label with the current month centered.

```
prevb <- Qt$QPushButton("<")
nextb <- Qt$QPushButton(">")
curmo <- Qt$QLabel()
blyt <- Qt$QHBoxLayout()
blyt$addWidget(prevb, stretch=0, Qt$Qt$AlignRight)
```

NULL

```
blyt$addWidget(curmo, stretch=1, Qt$Qt$AlignHCenter)
```

NULL

```
blyt$addWidget(nextb, stretch=0, Qt$Qt$AlignLeft)
```

NULL

```
lyt$addLayout(blyt)
```

NULL

Our monthly calendar will be added to the widget through a stacked widget. The `setMonth` function first checks to see if there is a previous widget, removing it if there is. (This isn't really necessary.) Then it adds in a new monthly calendar to match the year and month.

```
stackedWidget <- Qt$QStackedWidget()
lyt$addWidget(stackedWidget)
```

NULL

```
setMonth <- function() {
  cur <- stackedWidget$currentWidget()
  if(!is.null(cur))
    stackedWidget$removeWidget(cur)
  stackedWidget$addWidget(makeMonth(year, month))
  curmo$setText(sprintf("%s %s", month.abb[month], year))
}
setMonth() # initial calendar
```



NULL

We connect to the clicked signals when the buttons are pressed. This shows how to decrement the month and year using the global variables month and year.

```
qconnect(prevb, "clicked", function() {
    if(month > 1) {
        month <- month - 1
    } else {
        month <- 12; year <- year - 1
    }
    setMonth()
})
```

QObject instance

QObject instance

Finally, we display the GUI (Figure 2.2.)

```
w$show()
```

NULL

```
w$raise()
```

NULL

## 2.3 Notebooks

The notebook layout is provided by the widget `QTabWidget`. This is not a layout, rather a notebook page consists of a label and widget. Of course, you can use a layout for the widget.

Pages are added through the method `addTab`. One can specify a widget, a widget and label or a widget, icon and label. Pages are inserted by index with the `insertTab` method.

Tabs allow the user to select pages, and in Qt can be customized. The text for a tab is adjusted through `setTabText` and the icon through `setTabIcon`. These use a 0-based index to refer to the tab. A tooltip can be added through `setTabToolTip`. The tabs will have close buttons if the property `tabsClosable` is `TRUE`. One connects to the `tabCloseRequested` signal to close the tab. The tab position is adjusted through the `setTabPosition` method with enumerated values such as `Qt::QTabWidget::North`. Call `isMovable` with `TRUE` allows the pages to be reorganized by the user.

When there are numerous tabs, the method `setUsesScrollButtons` can indicate if the widget should expand to accommodate the labels or add scroll buttons.

## 2. LAYOUT MANAGERS

---

The current tab is adjusted through the `currentIndex` property. The actual widget of the current tab is returned by `currentWidget`. To remove a page the `removeTab` is used, where tabs are referred to by index.

### Example 2.3: A tab widget

A simple example follows. First the widget is defined with several properties set.

```
nb <- Qt$QTabWidget()
nb$setTabsClosable(TRUE)
```

```
NULL
```

```
nb$setMovable(TRUE)
```

```
NULL
```

```
nb$setUsesScrollButtons(TRUE)
```

```
NULL
```

We can add pages with a label or with a label and an icon:

```
nb$addTab(Qt$QPushButton("page 1"), "page 1")
```

```
[1] 0
```

```
icon <- Qt$QIcon("small-R-logo.jpg")
nb$addTab(Qt$QPushButton("page 2"), icon, "page 2")
```

```
[1] 1
```

```
for(i in 3:10) nb$addTab(Qt$QPushButton(i), sprintf("path %s", i))
```

The close buttons put out a request for the page to be closed, but do not handle directly. Something along the lines of the following is then also needed.

```
qconnect(nb, "tabCloseRequested", function(index) {
  nb$removeTab(index)
})
```

```
QObject instance
```

## 2.4 Paned Windows

## 2.5 Main windows

## Widgets



## Widgets using an MVC framework



Qt paint