




Ping of Death

Ana Jesus

07/03/2023

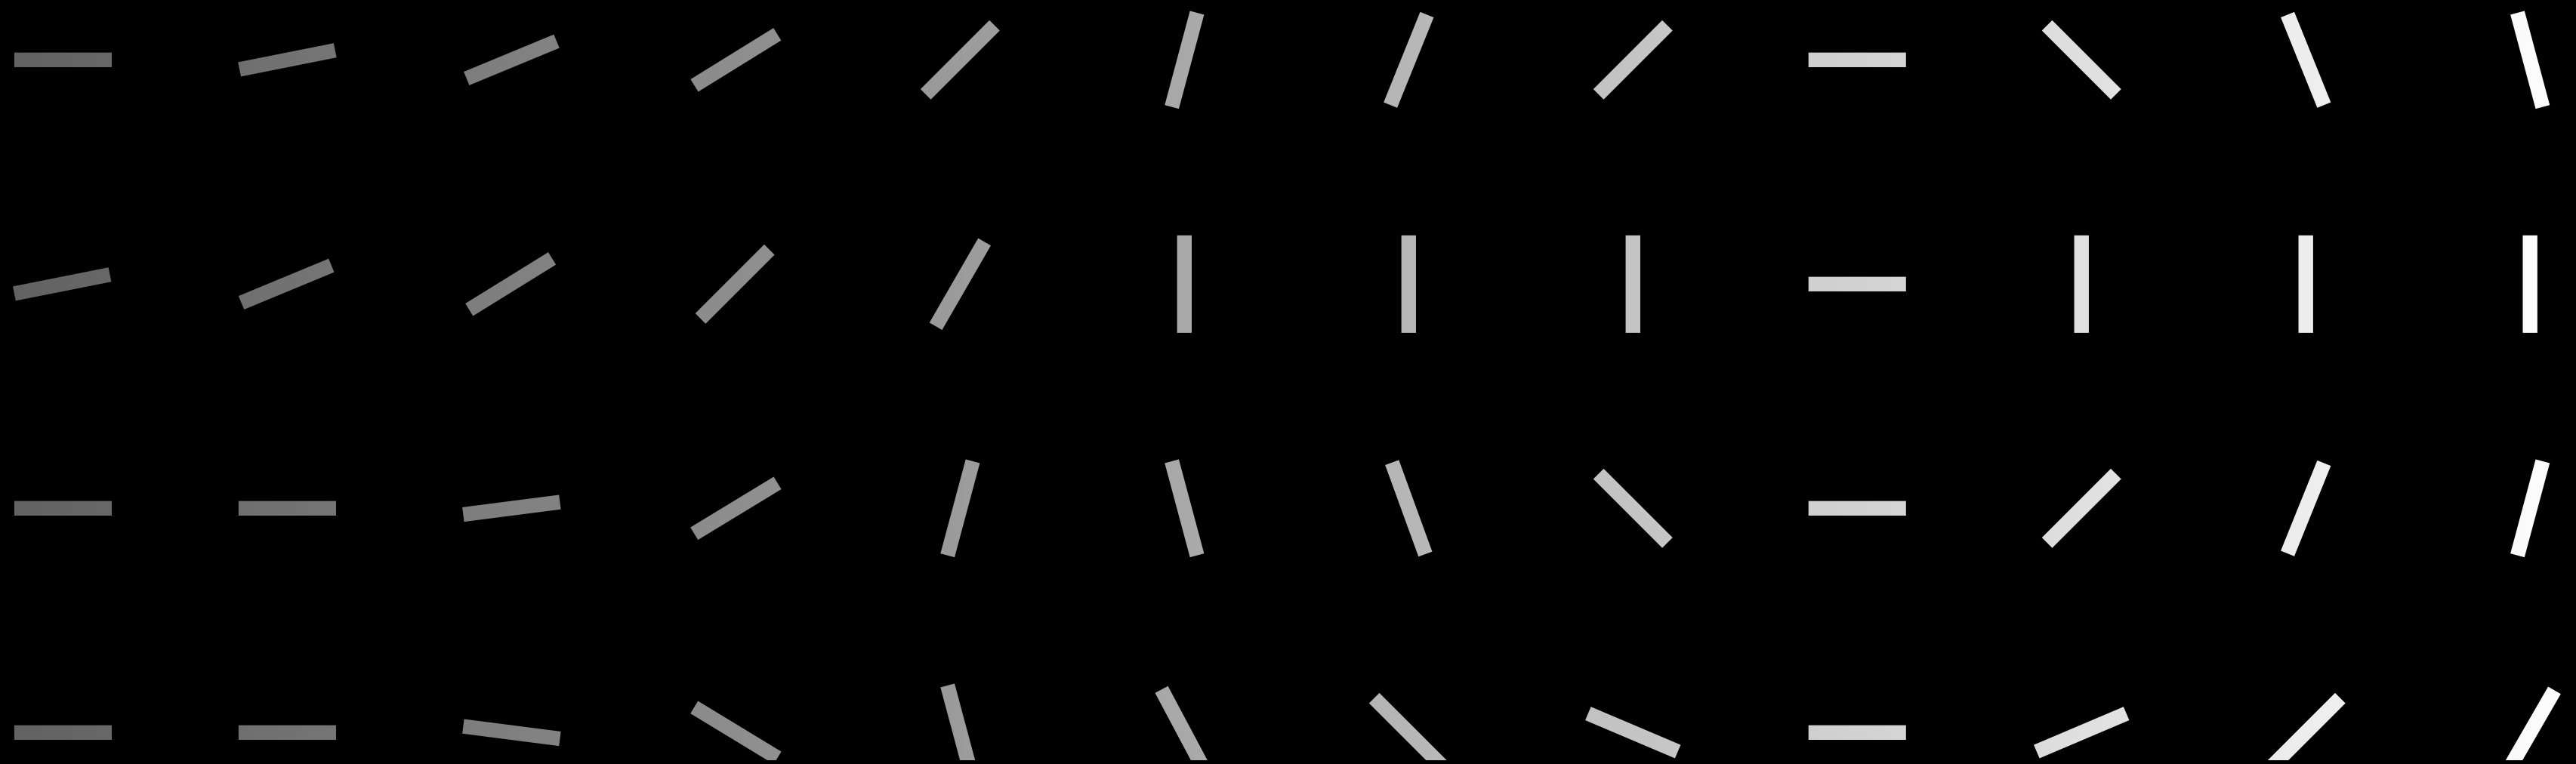

PowRangers




Ping of Death



What is it?

This type of attack uses IP packets to ping a target system with an IP size greater than the maximum 64KB. IP packets of this size are not allowed, so the attacker fragments the IP packets. As the system reassembles packets, it can suffer from buffer overflows and other hangs.

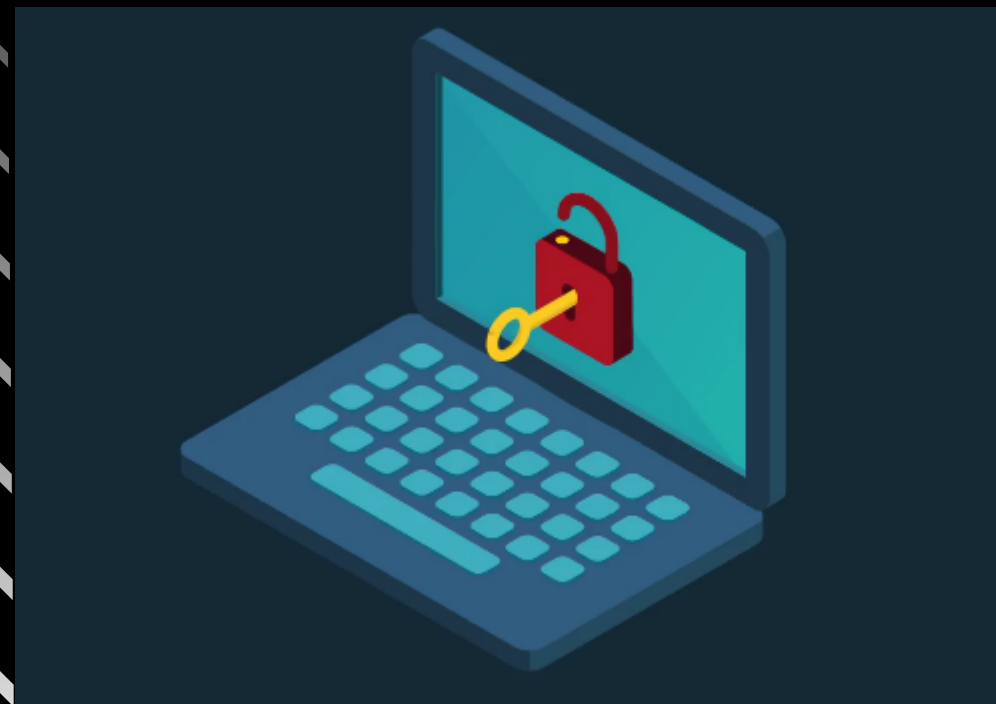


Smurf




Smurf Attack

Smurf attacks are specialized malware threats that can cause severe damage.

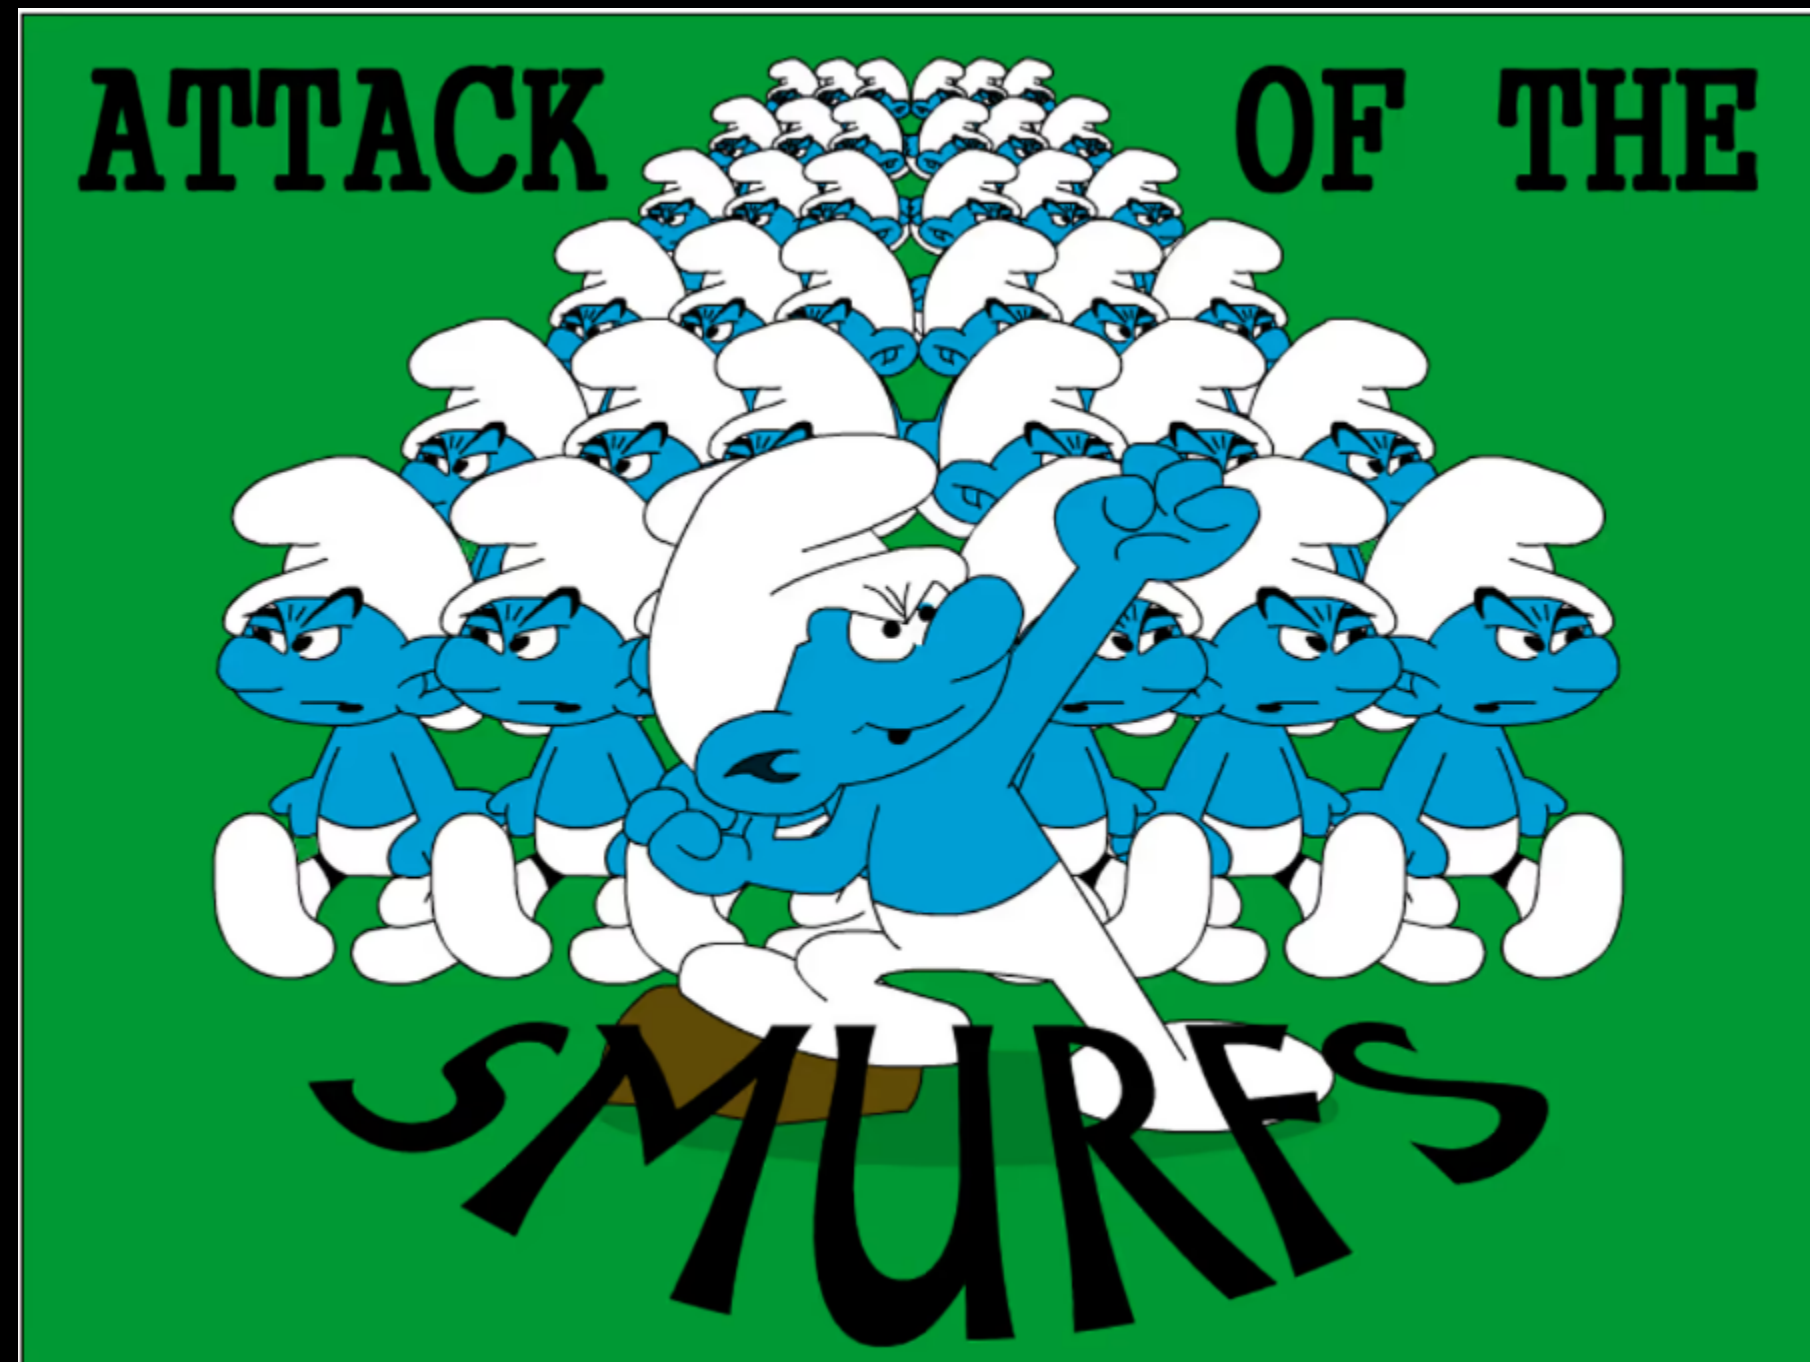

Smurf Attack

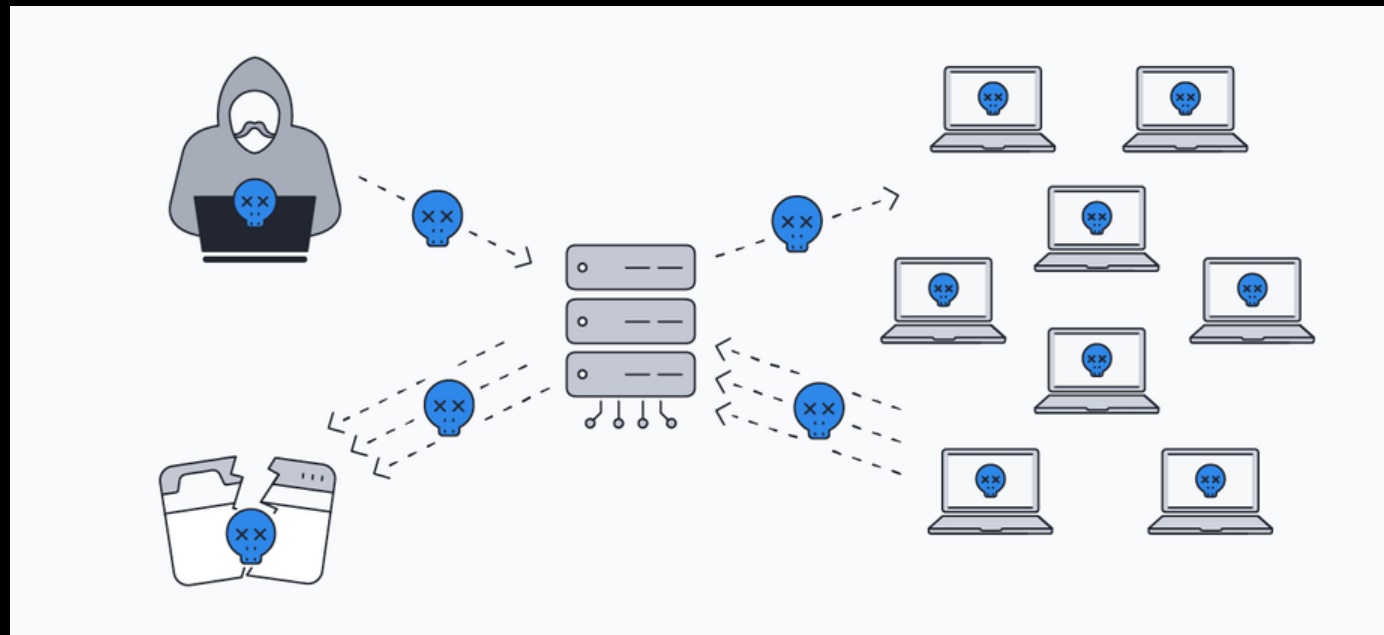

Like the cartoon of the same name, Smurf attacks use smaller elements that work together to hit large targets


In a Smurf attack, data is ICMP echo requests or pings. The attack uses devices connected to the network to create a botnet that overloads the network with a high volume of pings.

By taking down servers, Smurf attacks can cause significant revenue losses for a company. They can disable services, interrupt site visits, and drive customers to competing sites. Smurf attacks can also cover up more serious threats like data theft or intellectual property theft.


Low and Slow Attack



Low and Slow Attack

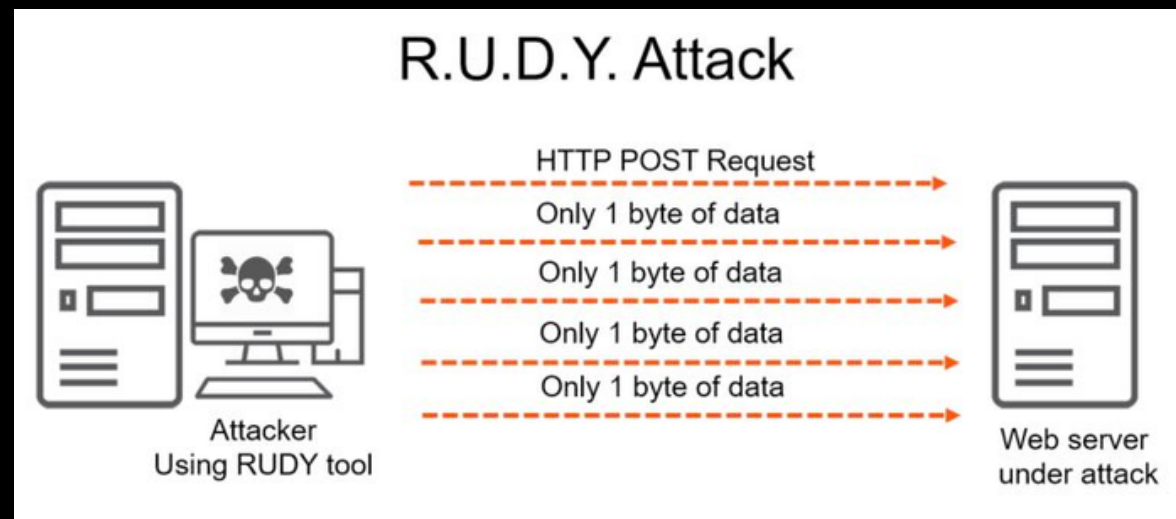

A low and slow attack is a type of DoS or DDoS attack that relies on a small stream of very slow traffic targeting application or server resources.

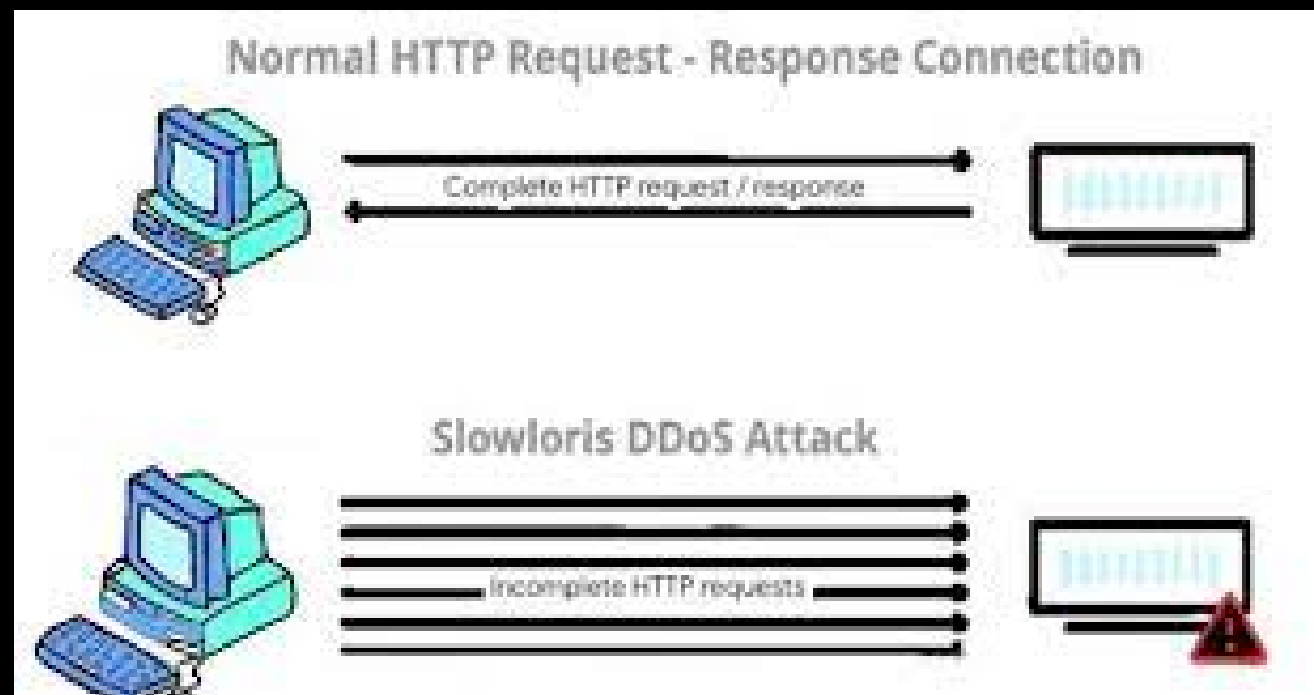

Because they do not require a lot of resources to pull off, low and slow attacks can be successfully launched using a single computer, as opposed to more distributed attacks that may require a botnet. Two of the most popular tools for launching a low and slow attack are called *Slowloris* and *R.U.D.Y.*



Famous DDoS attacks



MafiaBoy Attack

In the year 2000, a 15-year-old hacker known as "Mafiaboy" took down several major websites, including CNN, Dell, E-Trade, eBay and Yahoo.



Mafiaboy, later identified as a high school student named Michael Calce, coordinated the attack by compromising the networks of several universities and using their servers to convert the DDoS attack. The fallout from this attack directly led to the creation of many of today's cybercrime laws.

GitHub Attack

2015 e 2018



The DDoS traffic originated in China and specifically targeted the URLs of two GitHub projects created to bypass the Chinese government's state censorship

The attack's traffic was created by injecting JavaScript code into the browsers of all people visiting Baidu

One of the largest verifiable DDoS attacks ever recorded targeted GitHub, a popular online code management service used by millions of developers.

The attack reached 1.3 terabytes per second (Tbps), sending packets at a rate of 126.9 million per second.

Can Talk Now



Glossary



Definition of words found in the
presentation

DDOS – Distributed
Denial-Of-Service

DDS – Denial of Service

ICMP – Internet Control Message Protocol



Thank you!