
```
□ …

□ PR7_1.html ×
Practical 7 > ■ PR7_1.html > → html
  1 <!DOCTYPE html>
  2
      <html lang="en">
  3
      <head>
           <meta charset="UTF-8">
  5
           <meta http-equiv="X-UA-Compatible" content="IE=edge">
  6
           <meta name="viewport" content="width=device-width, initial-scale=1.0">
  7
           <title>PR7_1</title>
  8
       </head>
  9
       <body>
 10
           <h1>Humayun Khan</h1>
           <h2>2005690093</h2><h2>C05IA</h2>
 11
           <hr>>
 12
           <form name="fees_rec">
 13
 14
               <Label>Total Fees</Label>
               <input type="text" id="TF" value="50000">
 15
               <br>
 16
               chry
 17
               <Label>Paid Fees</Label>
 18
               <input type="text" id="PF" onchange="cal_balance()">
 19
 20
 21
               <br>
 22
               <Label>Balance Fees</Label>
 23
               <input type="text" id="BF" onfocus="color()" onfocusout="colorA()">
 24
           </form>
 25
      </body>
       <script src="PR7_1.js"></script>
 26
 27
       </html>
```

```
pR7_1.js ×
Practical 7 > 5 PR7_1.js > 😭 cal_balance
       function cal_balance(){
   2
           Total = parseInt(document.forms.fees_rec.TF.value);
   3
           Paid = parseInt(document.forms.fees_rec.PF.value);
           Balance = Total - Paid;
   4
   5
           document.forms.fees_rec.BF.value = Balance;
   6
   7
       function color(){
  8
  9
           document.forms.fees_rec.BF.style.backgroundColor = "Yellow";
  10
  11
 12
       function colorA(){
 13
           document.forms.fees_rec.BF.style.backgroundColor = "White";
  14
```

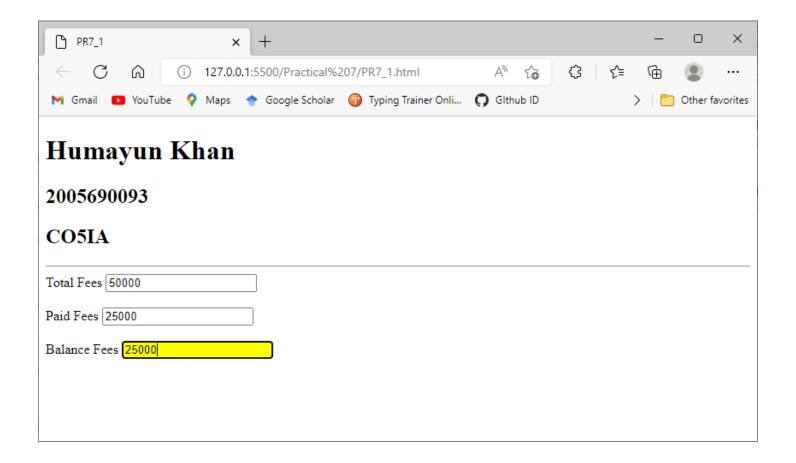

Conclusion:

Hence, we successfully created a webpage to implement Form Events.