

# Programming in Data science

Asad Waqar Malik


Held on 26 Sept 2019



# Question

Lists can be coerced with which function?


45 / 60 correct responses

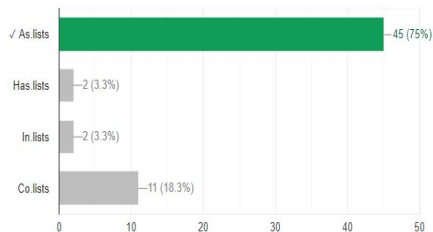

# Question

Which is the basic data structure of R containing the different type of data?

47 / 60 correct responses

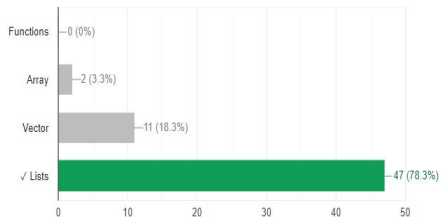


# Question

The four most frequently used types of data objects in R are vectors, matrices, data frames and \_\_\_\_\_.

|]


57 / 60 correct responses

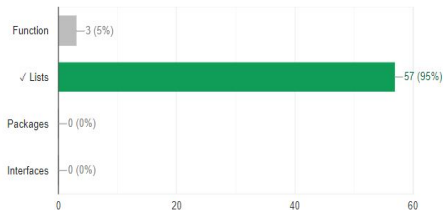

# Question

Computation with list can be achieved using a function for avoiding

54 / 60 correct responses

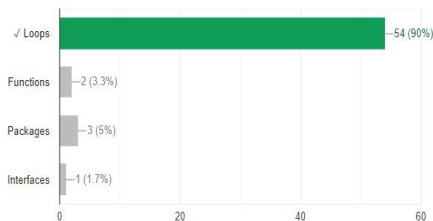


# Question

Accessing elements is achieved through a process called \_\_\_\_\_




56 / 60 correct responses

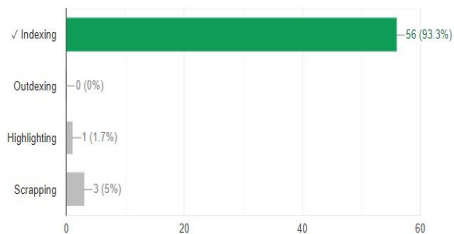

# Question

Lists can be created using the \_\_\_\_\_ function.

59 / 60 correct responses

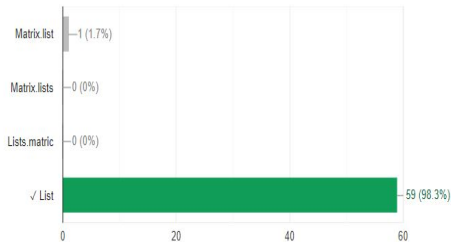


# Question

First component of the list can be accessed by \_\_\_\_\_



39 / 60 correct responses

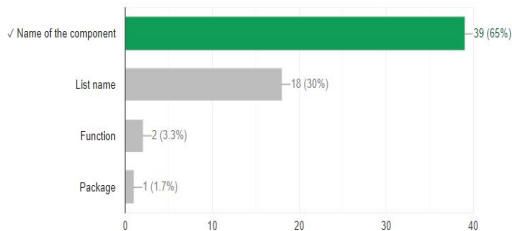




# Question

How can we access the first component of the list?


53 / 60 correct responses

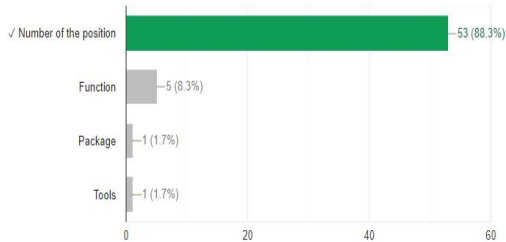

# Question

To extract a sublist, we use \_\_\_\_\_ brackets.


3 / 60 correct responses

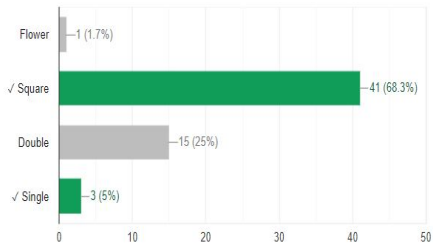

# Question

The length of a list is \_\_\_\_\_ to the number of components in that list.

53 / 59 correct responses

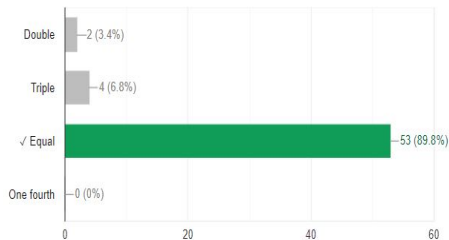

# Question

Which function can be used to determine the names assigned to a list?

53 / 59 correct responses

