

Programming in Data science

Quiz-1: Solution

Asad Waqar Malik

Department of Information Systems
Faculty of Computer Science and Information Technology
University of Malaya
Malaysia.
asad.malik@um.edu.my

Held on Sept 19, 2019



Contents!


- 1 Quiz-1 Solution
 - Solution

Quiz Solution

What is the simplest way of creating the vector?




50 / 53 correct responses

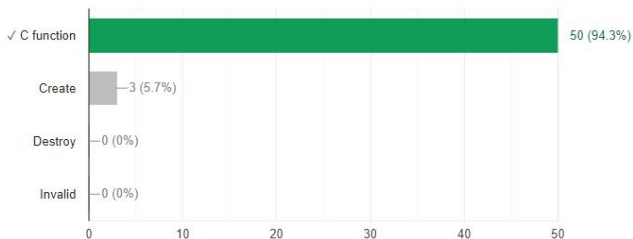

Quiz Solution

Which function replicates elements of vectors?

49 / 53 correct responses

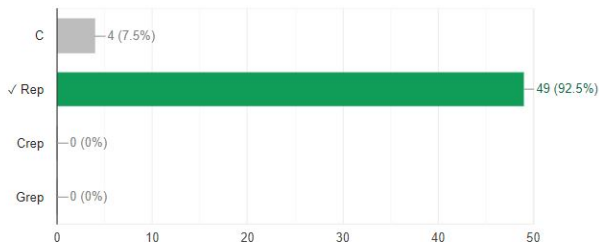


Quiz Solution

The _____ function creates a regular sequence of values to form a vector.




50 / 53 correct responses

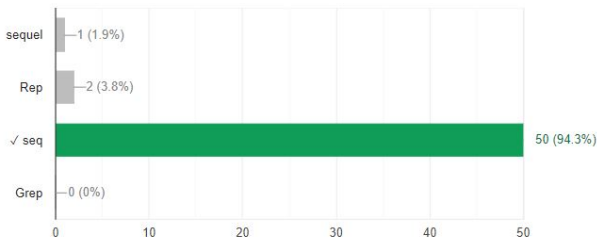

Quiz Solution

To bind a row onto an already existing matrix, the _____ function can be used.


53 / 53 correct responses

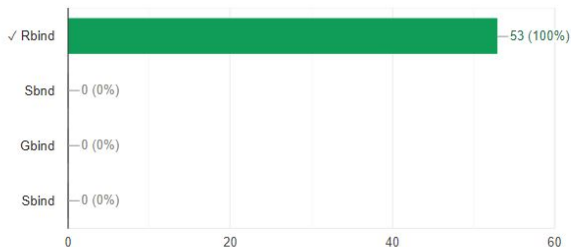

Quiz Solution

Which of the following statement is alternative to "?solve "


42 / 53 correct responses

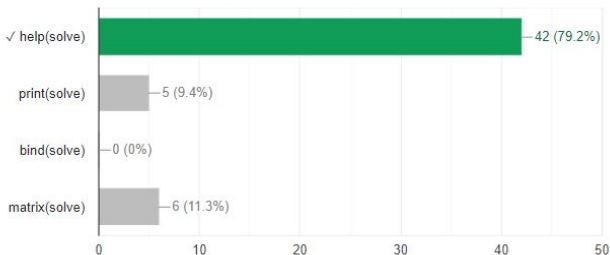

Quiz Solution

R has how many atomic classes of objects ?


48 / 53 correct responses

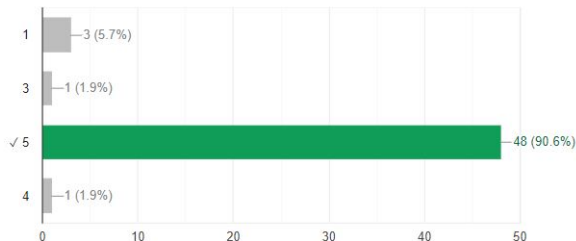

Quiz Solution

If you explicitly want an integer, you need to specify the ____ suffix.

44 / 52 correct responses

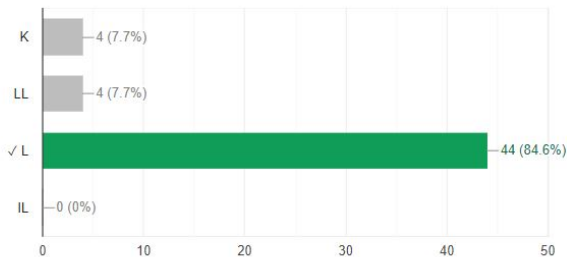


Quiz Solution

What would be the result of following code? `> x <- vector("numeric",
length = 10) > print(x)`




48 / 52 correct responses

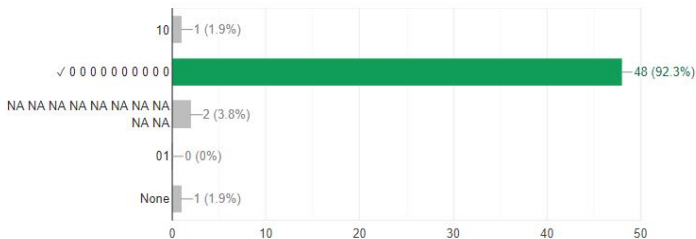

Quiz Solution

By default, matrix has following dimensions

26 / 52 correct responses

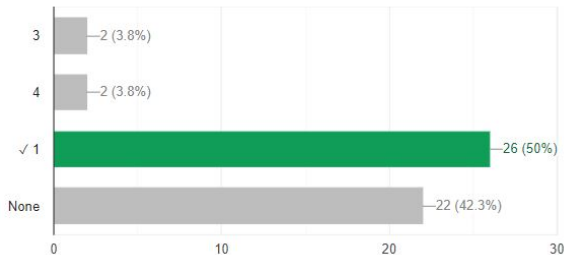


Quiz Solution

By default, matrix is arranged row-wise




37 / 52 correct responses

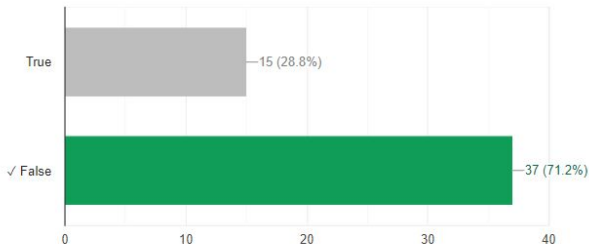

Quiz Solution

Select the statement to produce the 2 x 3 matrix with all "NA" values

44 / 52 correct responses

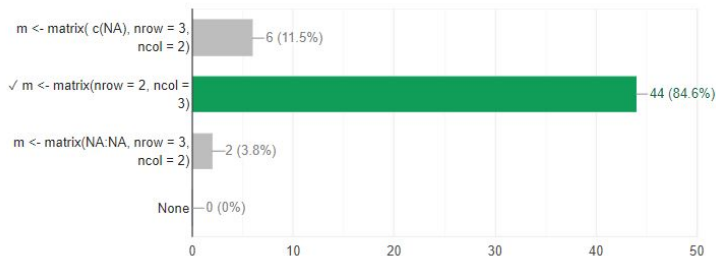

Quiz Solution

In matrix, the kth row can be accessed as:

48 / 52 correct responses

